




Energy research Centre of the Netherlands

EU Standards for Energy Security of Supply

Updates on the Crisis Capability Index and the Supply/Demand Index
Quantification for EU-27

ECN *Martin Scheepers, Ad Seebregts*
CIEP *Jacques de Jong, Hans Maters*



clingendael international energy programme

Energy research Centre of the Netherlands

ECN Policy Studies is part of the Energy research Centre of the Netherlands (ECN). The unit Policy Studies carries out research and provides advice in the field of energy policy. Key activities are development of scenarios, analyses of energy markets, comparison and evaluation of energy and environmental policies and socio-economic analyses of innovation and transitions. The 50 researchers of ECN Policy Studies form a multidisciplinary team with academic and applied energy knowledge of drivers, markets, sectors, policies and technologies. A range of modelling tools is available to support the analyses. Most of the research is done for the European Commission and the Dutch government.

Further information on the activities of ECN Policy Studies can be found on ECN's website: <http://www.ecn.nl/ps/>

Westerduinweg 3, 1755 LE Petten, The Netherlands

P.O. Box 1, 1755 ZG Petten, The Netherlands

Telephone: +31 224 56 49 49

Telefax: +31 224 56 83 38

E-mail: info@ecn.nl

Clingendael International Energy Programme

CIEP is affiliated to the Netherlands Institute of International Relations 'Clingendael'. CIEP acts as an independent forum for governments, non-governmental organisations, the private sector, media, politicians and all others interested in changes and developments in the energy sector.

CIEP organises lectures, seminars, conferences and roundtable discussions. In addition CIEP members of staff lecture in a variety of courses and training programmes. CIEP's research, training and activities focus on three themes:

- regulation of energy markets (oil, gas, electricity) in the European Union;
- the international economic and geopolitical aspects of oil and gas markets, particularly with respect to the European Union security of supply;
- energy and sustainable development.

CIEP is endorsed by BP, the Dutch Ministry of Economic Affairs, Eneco, Energie Beheer Nederland, Essent, the Dutch Ministry of Foreign Affairs, GasTerra, N.V. Nederlandse Gasunie, ING, NAM, NUON, Oranje-Nassau Groep, Port of Rotterdam, Shell Nederland, Total, the Dutch Ministry of Housing, Spatial Planning and the Environment, Vopak Oil Europe Middle East and Wintershall.

CIEP publications and research results are made available primarily through the CIEP website: www.clingendael.nl/ciep.

The opinions expressed in this publication are those of the author(s) and not those of CIEP or aforementioned endorsing institutions.

Clingendael 7, 2597 VH The Hague, The Netherlands

P.O. Box 93080, 2509 AB The Hague, The Netherlands

Telephone: +31 70 374 66 16

Telefax: +31 70 374 66 88

E-mail: ciep@clingendael.nl

Title: EU Standards for Energy Security of Supply
Updates on the Crisis Capability Index and the Supply/Demand Index Quantification for EU-27

Authors: Martin Scheepers (ECN), Ad Seebregts (ECN), Jacques de Jong (CIEP), Hans Maters (CIEP)

Copyright: 2007 ECN / 2007 Clingendael International Energy Programme

Number: ECN-E-07-004/CIEP

Pictures: ECN Petten, The Netherlands

Printed by: Nashuatec, Petten

Published by: ECN/Clingendael International Energy Programme

EU Standards for Energy Security of Supply

Updates on the Crisis Capability Index and the Supply/Demand Index
Quantification for EU-27

ECN *Martin Scheepers, Ad Seebregts*
CIEP *Jacques de Jong, Hans Maters*

April 2007

Acknowledgements

This report presents the results of the research project ‘Follow-up EU Standards for energy security of supply’, carried out for the Dutch Ministry of Economic Affairs (EZ). The project is registered under ECN project number 7.7795.

Contact person within the Ministry for this study is Bert Roukens.

The further improvement on the Crisis Capability Index and of the Supply/Demand Index has taken advantage of the fruitful discussions with and comments from policy makers and researchers after publication of the first report ‘EU Standards for energy security of supply’¹.

In particular, the authors would like to mention the useful comments made by:

- Bert Roukens and Frans Wieleman (EZ, the Netherlands)
- Heinz Hilbrecht and part of his staff of the DG TREN Directorate of Conventional Energy Sources, following a presentation of the ECN/CIEP study at the DG TREN office (29 June 2006)
- Sustainable Energy Ireland (SEI, a.o. Fergal O’Leary)
- Thierry Bros (France)
- Department of Industry (DTI), UK
- Nicolas Lefevre (IEA)
- CIEP Gas Group.

Preface

This report is an update and an extension of the report ‘EU Standards for energy security of supply’ by the same authors, ECN report number ECN-C--06-039/CIEP, published in June 2006. Included in this update are:

- An update of the conceptual models underlying the Crisis Capability Index and the Supply/Demand Index (S/D Index).
- Quantification of the latter S/D Index for all EU-27 Member States and the EU-27 as an aggregate, for the years 2005 and 2020.

The latter quantification is based on the updated ‘Trends to 2030’ scenario published in May 2006 by the European Commission, Directorate-General for Energy and Transport.

¹ Scheepers, M.J.J., A.J. Seebregts, J.J. de Jong, J.M. Maters (2006): *EU Standards for Energy Security of Supply*, ECN-C-06-039, ECN/CIEP, Petten/The Hague, the Netherlands, June 2006. Available at: <http://www.ecn.nl/docs/library/report/2006/c06039.pdf>

Contents

List of tables	5
List of figures	5
Summary	7
1. Introduction	15
2. The EU context	17
3. The concept of energy supply security standards	19
4. The Crisis Capability Index	22
4.1 The Risk Assessment	22
4.2 Mitigation & Emergency measures	23
4.3 Using the CC Index	27
5. The Supply/Demand Index	29
5.1 Security of Supply Indicators	29
5.2 The S/D Index Model	29
5.3 Essential Energy Demand Needs	31
5.4 Primary Energy Sources	33
5.5 Energy Conversions and Transport	35
6. The Supply/Demand Index for the EU-27 and individual Member States	37
6.1 Today: 2005	37
6.2 2020: Using the 'Trends to 2030' scenario	43
6.3 S/D Index and scenarios as benchmarking or policies comparison tools	44
7. Multilateral actions	46
8. Towards an EU standard?	48
9. Concluding remarks	50
References	51
Abbreviations	54
Appendix A Scoring rules	55
A.1 Final energy demands	55
A.1.1 Definitions	55
A.1.2 Benchmark values and scoring rules	56
A.2 Primary energy sources	57
A.2.1 Definitions	57
A.2.2 Oil and gas	59
A.2.3 Coal, Nuclear, Renewable sources, Other	61
A.3 Energy conversion and transport	61
A.3.1 Definitions	61
A.3.2 Electricity	62
A.3.3 Gas	64
A.3.4 Heat	66
A.3.5 Transport fuels	66
Appendix B Quantification details	68
B.1 Data sources	68
B.2 Additional assumptions and data requirements for future scenarios	78
B.2.1 Final energy demand	78

	B.2.2 Energy conversion and transport	78
	B.2.3 Primary energy sources	78
B.3	Limitations and flexibility	79
	B.3.1 Limitations	79
	B.3.2 Flexibility	79
Appendix C	Additional quantitative results	80
	C.1 Detailed results	80
	C.2 Sensitivity cases	87
	C.2.1 Sensitivity on thresholds oil and gas	87
	C.2.2 Weight of the PES part versus other parts	87
	C.3 Quantifications based on previous S/D Index model	92
	C.3.1 2005 with selected Member States	92
	C.3.2 2020 based on 'old' Trends to 2030 scenario	93
	C.3.3 Focusing at sub-indices	94
	C.3.4 Additional sensitivity analyses on most important weights	96
	C.4 More recent baseline scenarios NL and UK	97
	C.4.1 Sensitivity analysis	100

List of tables

Table S.1	<i>S/D Index and Sub-indices, base case update S/D Index Model</i>	12
Table 4.1	<i>Checklist risk assessment for sudden supply interruptions</i>	24
Table 4.2	<i>Checklist for assessment of measures to mitigate sudden supply interruptions</i>	26
Table 6.1	<i>Today's S/D Index for energy supply security for a number of selected EU MS and the EU-27</i>	39
Table 6.2	<i>S/D Index and Sub-indices, base case update S/D Index Model</i>	43
Table B.2	<i>Example of summary energy balance, EU-25, 1990-2003</i>	68
Table B.3	<i>Summary energy balance EC baseline scenario, the Netherlands, 1990-2030</i>	70
Table B.4	<i>Summary indicators EC baseline scenario, the Netherlands, 1990-2030</i>	73
Table B.5	<i>Gross inland consumption, EU-25 and Member States, 2003</i>	76
Table B.6	<i>Import dependencies, EU-25 and Member States, 2003</i>	77
Table C.1	<i>Today's S/D Index for energy supply security for a number of selected EU MS and the EU: old model</i>	92
Table C.2	<i>S/D Index for energy supply security for a number of selected EU MS and the EU in 2020 on the basis of EC baseline scenarios: old model</i>	93
Table C.3	<i>Summary of results, default values: old model</i>	95
Table C.4	<i>Summary of results, with 0.9 instead of 0.7 weights for supply and primary energy sources (demand and C+T 0.1 instead of 0.3): old model</i>	96
Table C.5	<i>S/D index for the Netherlands, 2020 and 2040, impact of other scenarios: old model</i>	98

List of figures

Figure S.1	<i>The Supply/Demand Index Model Structure</i>	8
Figure S.2	<i>S/D Index, EU-27 and Member States, 2005</i>	10
Figure S.3	<i>S/D Index, EU-27 and Member States, 2020</i>	11
Figure 2.1	<i>EU energy import dependencies</i>	17
Figure 5.1	<i>The Supply/Demand Index Model Structure</i>	30
Figure 5.2	<i>Weights (defaults) and shares used in the Supply/Demand Index Mode</i>	31
Figure 5.3	<i>Long term EU development of GDP, energy demand and energy intensity (2000=100)</i>	32
Figure 5.4	<i>Index values for primary energy sources as a function of the net share of domestic supply</i>	34
Figure 6.1	<i>Today's S/D Index and main Sub-Indices for a selected number of Member States</i>	38
Figure 6.2	<i>S/D Index, EU-27 and Member States, 2005</i>	41
Figure 6.3	<i>S/D Index, EU-27 and Member States, 2020</i>	42
Figure A.4	<i>Scoring rules for imports of oil (top) and gas (bottom)</i>	60
Figure C.5	<i>S/D Index for today and 2020, EU-25 and four Member States: old model</i>	94
Figure C.6	<i>S/D Index the Netherlands, another future scenario (GE) and sensitivity on coal criterion (coal 100): old model</i>	99
Figure C.7	<i>Sensitivity analysis for United Kingdom (top) and The Netherlands (bottom): old model</i>	101

Summary

Increasing awareness of the EU's growing energy import dependency has put the issue of energy supply security high on the policy agenda again. The other two main goals of energy policy are facilitating properly functioning energy markets and minimising the environmental impact of energy use. These latter two goals both have an EU framework for defining and assessing policy instruments. Such a framework is largely absent for energy supply security, which, over time, has remained a national policy of the Member States. Some partial frameworks do exist, but only on an energy sector basis, such as an oil supply emergency framework and to a lesser extent for natural gas. Yet, there is no overall framework for the full energy balance.

In a 2004 study on Energy Supply Security and Geopolitics, prepared for the European Commission's DG TREN, CIEP recommended developing an EU standard for energy supply security (CIEP, 2004). Such a standard, if adopted by all Member States (MS), could facilitate a more objective review and assessment of the supply security of the entire EU and the individual MS' medium and longer term energy balances. It would help to reinforce coherence and efficiency of EU and MS' energy policies through a process of consultation and coordination, while acknowledging the asymmetries among the Member States. The underlying study was performed by ECN and CIEP and aims to provide a model, based on standards, for the EU and its Member States to assess energy supply security. Based on this model the MS can discuss, review and adapt their underlying national energy policies on the basis of pre-agreed criteria where necessary. The standards could in time develop into a policy instrument that not only allows the MS to optimise their national energy security of supply policies, but also help streamline policy instruments among MS to produce an improved EU security level. The model could be particularly useful in the context of the Strategic EU Energy Review, as proposed by the EU Commission in its 2006 Green Paper on EU energy policy (EC, 2006).

From a consumer's point of view it is less relevant what causes a supply shortage or supply disruption and which part of the supply chain is causing the trouble. Therefore, the starting point of this study is that an assessment of energy supply security should include all possible causes of supply shortages and disruptions and comprehend the total supply chain. Furthermore, a Member State's energy security relates to the short-term risks as well as the changes of these risks in the longer term. Such a distinction in the model is relevant because of the different types of policies concerned (e.g. emergency measures to mitigate sudden supply interruptions in the short term and fuel mix changes to reduce security of supply risks in the longer term).

The model developed in this study focuses on a process that is based on a common and objective framework for reviewing and assessing energy supply security on the basis of pre-agreed criteria. The model uses two quantitative indicators and includes some qualitative considerations:

1. The first indicator deals with the risk of sudden unforeseen short-term supply interruptions and the capability to manage them. This is the Crisis Capability or CC Index.
2. The second quantitative indicator is covering full energy supply and demand balances, both present and future ones. This is the Supply/Demand Index or S/D Index.
3. The qualitative considerations concerning international and multilateral measures for securing overall producer/consumer relations and safeguarding vulnerable transport routes for oil and gas.

Crisis Capability Index

The Crisis Capability Index (CC Index) combines the risk of a country to be confronted with sudden supply interruptions and its potential impact (the Risk Assessment, RA) and the capability of that country to manage and mitigate these impacts (the Mitigation Assessment, MA). Each country is invited to make its own RA and MA on the basis of checklists with some simple scoring values. If the RA is higher than the MA value, the CC Index gets a value of less than 100. The CC Index methodology has been discussed and partially tested with Dutch and Irish SoS experts.

Supply/Demand Index

The S/D index aims at review and assessment of energy security of supply in the medium and longer run. The S/D Index covers final energy demand, energy conversion and transport and primary energy sources (PES) supply. It uses four types of inputs, two objective types and two types of a more subjective nature. The objective inputs concern the shares of different supply and demand types (i.e. for demand: industrial use, residential use, tertiary use and transport use; for supply: oil, gas, coal, nuclear, RES and other) and the values characterizing capacity and reliability in conversion and transport based on the secondary energy carriers (electricity, gas², heat and transport fuels). Figure S.1 displays the conceptual model of the elements considered in the overall S/D Index.

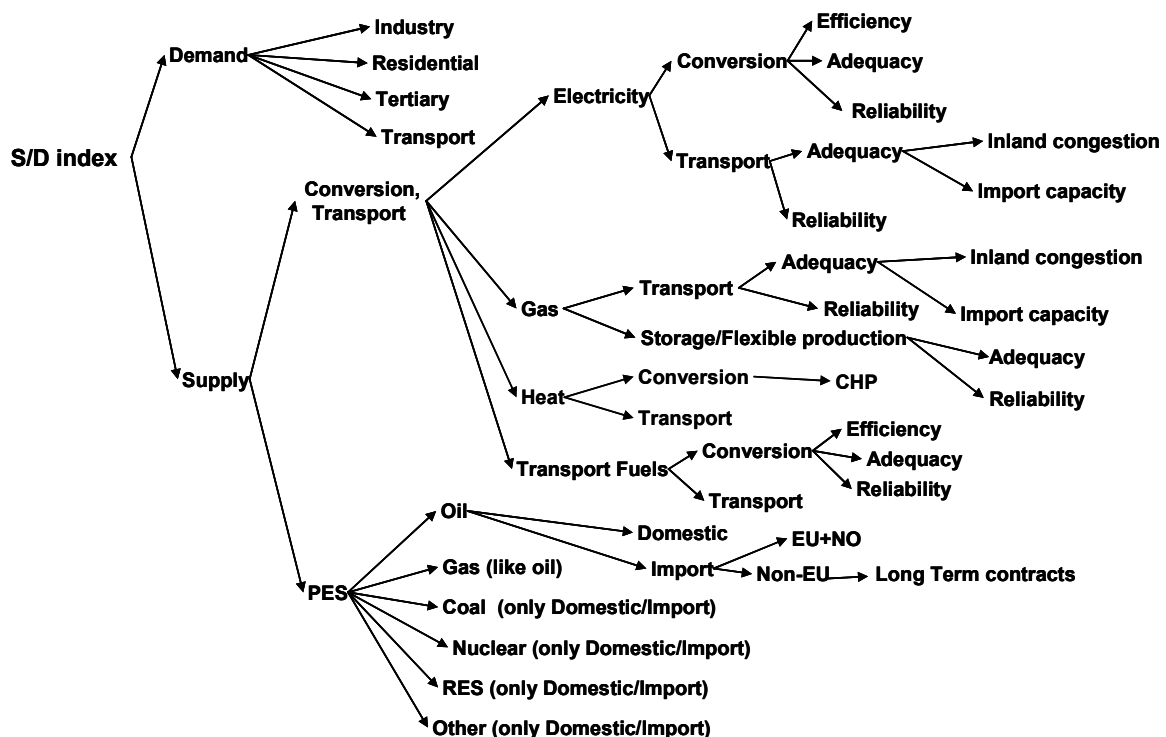


Figure S.1 *The Supply/Demand Index Model Structure*

The subjective inputs concern the weights that determine the relative contribution of the different components in the Index (such as the relation between supply and demand outputs in the Index, or the relation between EU imports and non-EU imports) and the scoring rules for determining various Index values reflecting different degrees of perceived vulnerabilities.

² The updated S/D Index model now has a separate branch for the secondary energy carrier Gas.

Quantitative results for the EU-27 and its Member States

The use of the S/D Index is illustrated with examples for the EU-27 and its Member States for they years 2005 and 2020. The examples are based largely on objective information contained in energy balances, derived from mainly Eurostat (Eurostat, 2006) and IEA statistics (IEA, 2006) and the 'EU Trends to 2030 - update 2005' baseline scenario (EC, 2006b). The S/D Index model combines that information with weighing factors and scoring rules, using existing indicators where possible. The most important uncertainties are scrutinised by some sensitivity analyses. The base case and indicative results for the year 2005 and 2020 are displayed in Figure S.2 and S.3, respectively, ordered by SoS position: the higher the S/D index value, the better the SoS position.

2005 Scores

The average value of the S/D index in 2005 is about 56. The range is from 82 (Denmark) to 25 (Cyprus). The differences between MS are mostly caused by differences in the PES (Primary Energy Sources) parts, caused by both the relatively large spread in the PES sub-index (ranges from 0 to 97, average of 53), see Table S.1, and the relative high weight of the PES sub-index (0.49) in the total S/D Index. Member States with high import dependencies for oil and gas, combined with high shares of these imports originating from outside the EU/Norway, have a relatively low score, i.e. an S/D Index below 50. Such MS include: Cyprus, Luxembourg, Malta, Latvia, Greece, Lithuania and Portugal. On the other hand, MS that are net exporting for gas and/or oil have a relatively high score, i.e. an S/D Index of 60 or higher. Examples are Denmark (82) and the United Kingdom (80). In addition, MS that are net importers but mainly from within EU/Norway also get high scores. An example is Ireland (75), and to a lesser extent Sweden (70). The Netherlands (69) has a high score due to being a net gas exporter. Romania (70) has relatively low import dependencies for oil and gas, added to moderate shares of coal/nuclear in its PES mix. France (64), Czech Republic (64), Germany (63) and Poland (60) have high scores due to their large shares of nuclear and/or coal in the PES mix. As most of the largest MS (Germany, France, United Kingdom) are part of the best scoring MS, the EU-27 aggregate score is also relatively high (65).

2020 Scores using the updated DG TREN baseline scenario

On average, the S/D Index decreases by almost 3 points compared to 2005 (from 56 to 53), mainly caused by a decrease in the PES sub-index (decrease of 6 points). So, the SoS position is somewhat less in 2020 than in 2005. The division into low/intermediate/high scoring MS does not really change when compared to today's situation (compare Figure S.1 with Figure S.2). In an absolute sense, Ireland and the UK observe the largest decrease in S/D Index (17 and 13 points, respectively), but both remain as relatively high scoring MS in 2020³. PES sub-index scores decreases are generally caused by higher import dependencies in 2020 and higher shares of imports from outside EU/Norway. For some MS, a combination of increasing shares of gas and decreasing shares of coal/nuclear also contribute to a decrease in the PES sub-index, and hence in the S/D Index. Some examples of this latter effect are Belgium, Estonia and Poland. The C+T (Conversion and Transport) sub-index increases on average (almost 5 points) due to the improved overall efficiency of electricity generation and higher shares of CHP in electricity production. Changes in the Demand sub-indices are moderate, which on the one hand reflects a 'moving' benchmark value based on the best performing MS, and on the other hand, a stand-still of the residential energy intensity benchmark. On average, a decrease of 2 point is observed, mainly due to a higher value of the residential energy intensity.

³ For MS that are net exporters (e.g. UK) or that have low shares of imports coming from outside EU/Norway (Ireland) in the year 2005, a generic assumption has been imposed for the year 2020, as such origin data are not known from the scenario. It is assumed that 50% of the imports of oil and gas come from outside the EU/Norway. For the other MS, the origins of these imports have been assumed equal for 2005 and 2020.

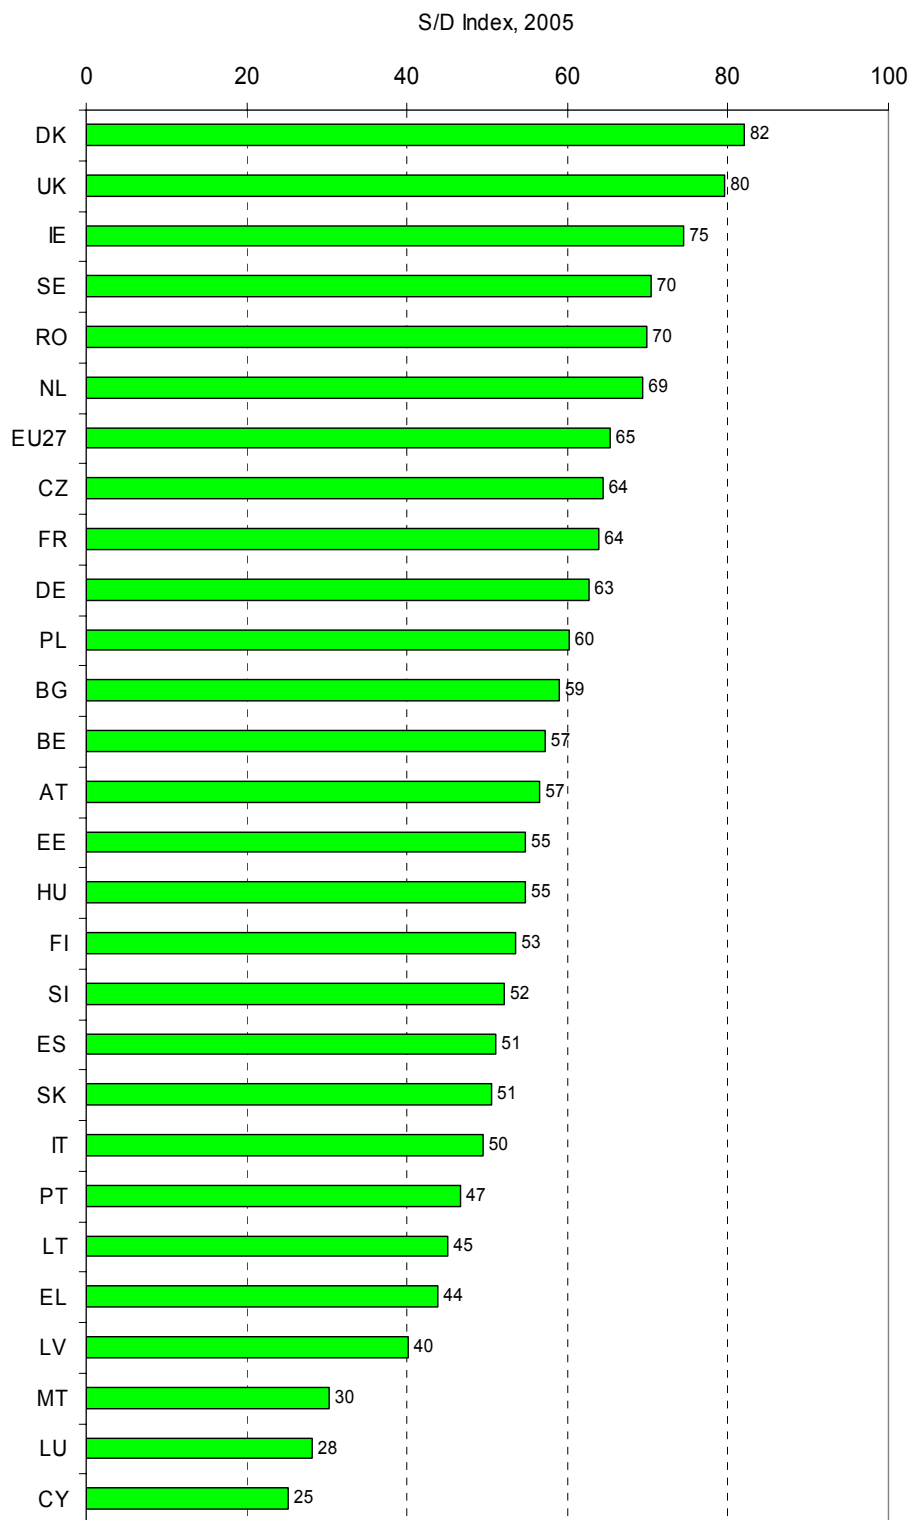


Figure S.2 *S/D Index, EU-27 and Member States, 2005*

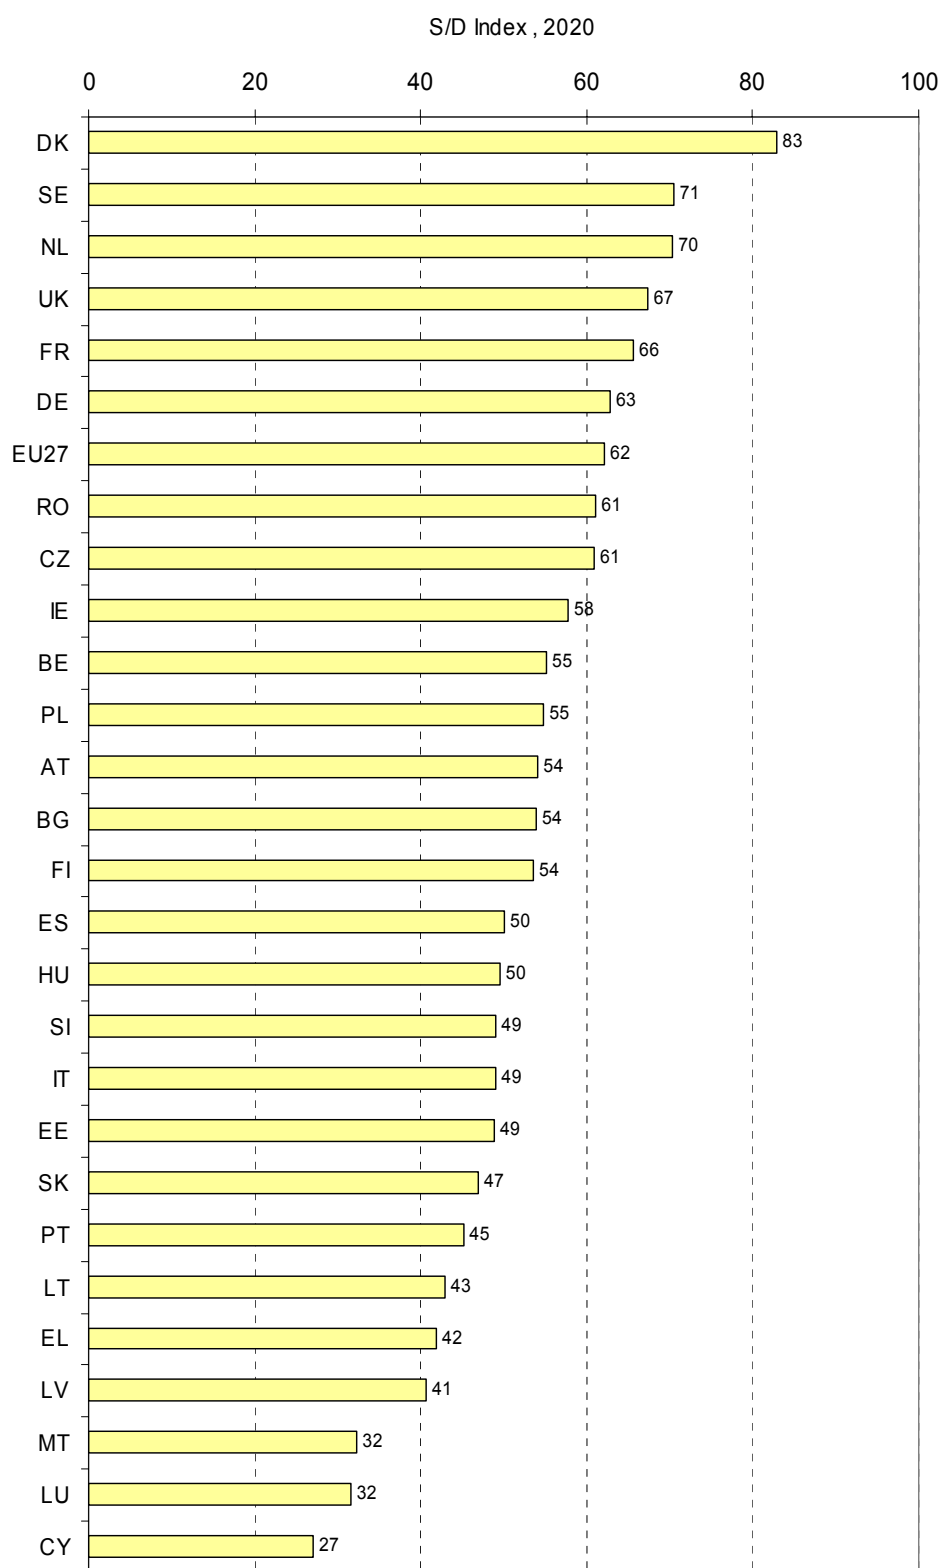


Figure S.3 *S/D Index, EU-27 and Member States, 2020*

Table S.1 *S/D Index and Sub-indices, base case update S/D Index Model*

	S/D Index	Primary Energy Sources	Conversion and Transport	Demand
EU-27-2005	65.4	65.3	75.1	58.7
EU-27-2020	62.1	56.1	82.7	57.4
BG-2005	59.0	60.4	74.6	45.8
BG-2020	53.9	51.4	82.1	38.3
AT-2005	56.6	44.6	85.5	55.8
AT-2020	54.1	39.0	89.7	53.9
BE-2005	57.2	61.9	61.1	46.9
BE-2020	55.1	51.8	73.3	47.7
CY-2005	25.1	4.4	42.5	46.7
CY-2020	27.0	5.8	43.5	50.0
CZ-2005	64.4	68.3	89.9	40.2
CZ-2020	60.9	60.9	92.2	38.9
DE-2005	62.7	64.9	60.0	60.8
DE-2020	62.9	59.7	71.7	62.0
DK-2005	82.1	93.6	79.0	65.6
DK-2020	82.9	95.9	79.9	63.7
EE-2005	54.8	63.9	48.4	44.6
EE-2020	48.9	49.7	54.4	43.8
EL-2005	43.9	34.1	48.4	56.7
EL-2020	41.8	29.5	53.6	53.7
ES-2005	51.0	37.2	73.8	57.6
ES-2020	50.1	34.5	79.4	54.9
FI-2005	53.4	61.5	51.5	41.6
FI-2020	53.6	61.9	51.5	41.6
FR-2005	63.8	67.8	57.4	61.8
FR-2020	65.7	69.5	61.3	62.5
HU-2005	54.8	49.0	78.3	47.8
HU-2020	49.5	39.9	80.3	43.5
IE-2005	74.5	94.9	53.7	55.8
IE-2020	57.8	58.9	58.0	55.8
IT-2005	49.5	29.3	67.8	69.8
IT-2020	49.0	31.1	67.3	65.6
LV-2005	40.2	31.6	51.8	46.1
LV-2020	40.6	35.0	55.1	39.7
LT-2005	45.1	25.5	60.3	66.6
LT-2020	43.0	22.9	65.7	60.0
LU-2005	28.2	11.2	67.7	28.2
LU-2020	31.7	15.9	70.5	30.2
MT-2005	30.4	0.2	31.8	78.6
MT-2020	32.2	2.5	33.5	79.9
NL-2005	69.4	72.9	90.0	49.2
NL-2020	70.4	75.0	91.4	48.2
PL-2005	60.2	68.5	55.9	49.6
PL-2020	54.8	58.1	60.6	45.4
PT-2005	46.6	27.3	70.7	61.3
PT-2020	45.2	26.8	74.1	55.1
RO-2005	69.9	77.1	86.2	46.9
RO-2020	61.0	63.2	86.3	39.7
SE-2005	70.4	87.5	49.0	57.3
SE-2020	70.6	79.1	64.0	61.2
SI-2005	52.2	49.5	73.0	41.8

	S/D Index	Primary Energy Sources	Conversion and Transport	Demand
SI-2020	49.1	42.9	75.4	40.7
SK-2005	50.6	47.5	80.4	34.8
SK-2020	47.0	42.1	82.3	30.1
UK-2005	79.6	97.0	66.2	60.5
UK-2020	67.4	69.4	72.4	60.8

Use of other scenarios

It should be noted that the development up to 2020 may be rather scenario specific. Quantification of the policy scenarios, e.g. the ‘Scenarios on energy efficiency and renewables’, (EC, 2006c) rather than the baseline ‘Trends to 2030’ (EC, 2006b) scenario may give somewhat different results.⁴ In the previous report (Scheepers et al., 2006) other examples of the impact of using other (country specific) scenarios have been presented (for the Netherlands and the UK). The application of the S/D Index for Ireland is another example (SEI, 2006).

Use of the S/D Index as a benchmarking or policies comparison tool

The S/D Index model can be used for benchmarking and comparison purposes, for historic recent years (statistics) or for the future (scenarios). For the purpose of an inter MS comparison (‘benchmarking of MS against each other or e.g. against an average or benchmark value’), comparison of future situations will only make sense if the same overall scenario is used for all MS. For the purposes of assessing the possible impact of different policies as resulting in different future developments of the energy system, comparisons for a specific MS or for the EU aggregate make sense. In that case, national MS specific scenarios can be used to observe the effects of changes in the energy system over time, and to assess how policy induced changes may have an effect on the energy system and how different policy options compare to each other. Moreover, changes in S/D index values can be compared to other effects, e.g. the CO₂ reduction over the respective time period (2005-2020).

Multilateral actions

The qualitative factor is dealing with multilateral policies and makes a distinction between the willingness of a MS to participate in multilateral approaches and programmes and its capabilities to follow through on these intentions. Here again, the Member State is invited to develop a policy document with these two elements, in which all kinds of energy diplomacy dealing with producer/consumer relations is discussed, together with participations in joint projects supporting these relations. A more controversial element might be the actions of a more military nature, securing vulnerable transport routes of oil and gas.

Final remarks

Four final comments should be made:

1. Firstly, companies and consumers will remain primarily responsible for the (short-term) security of their own energy supplies, making sure that they invest and contract for energy in a timely manner. Governments are responsible for national energy balances and fuel mixes. The use of a shared framework for assessing the energy situation in MS will also uncover the impact of national policy choices on the EU energy market.
2. Secondly, it is important to stress that compatibility and compliance with existing emergency arrangements and commitments under the IEA Treaty remain part of this proposed policy review and assessment process.
3. Thirdly, the use of standards for security of supply provides a tool that allows for explicitly addressing trade offs between security of supply, mitigation of (CO₂) emission and cost.

⁴ For the EU-25 as an aggregate, five of these policy scenarios have been quantified for the previous version of the S/D index model (Groenbergh, 2006).

4. Lastly, if the EU wishes to embark on a review process based on standards, it is recommended that the whole process be provided with a legal basis that would set procedures, define inputs and data, determine responsibilities and boundary conditions and procedures and periodicity. Such a legal basis could help to maintain the required level of compatibility and transparency and is perhaps best structured in a Council regulation.

1. Introduction

The increasing import dependency in the European Union (EU), the growing concentration of oil and gas supplies in a limited number of net-exporting countries/regions in the world and the growing competition among consuming countries for scarce supplies has put security of energy supply high on the political agenda again. This change in the international energy balances has raised concerns in the EU because the energy markets of the EU member states (MS) are at the same time involved in a process of liberalization and making energy balances more environmentally sustainable. Security of supply concerns are matched by security of demand concerns in producer countries. Debates among producer and consumer countries focus required levels of investments, market access and diversity of demand and supply. Current investment developments, together with market and regulatory uncertainties, have resulted in a switch from a buyer's to a seller's market, further emphasizing the security of supply fears in consumer countries.

The competency of the EU in energy policy-making does not cover all three main goals, i.e. the market, the environment and security of supply. Both the internal energy market and the environment policies are based on a EU policy framework. Such a policy framework is nearly absent for security of supply, where the MS have largely maintained their national competence or have agreed to share their competence in the International Energy Agency (oil market emergencies).

Security of energy supply policies or policy initiatives are characterized by the fuel-by-fuel and top-down approaches often proposed by the European Commission (EC). The history of energy policy making in the EU entails a large series of attempts to formulate an EU-wide energy policy, including security of supply (Van der Linde and Lefeber, JWT 1988). The existence of two sectoral treaties (ECSC and Euratom) have further emphasized the sectoral and top-down approach, thus preventing the capture of synergies and efficiencies in combining the strengths of different policy approaches. Particularly the development of the internal gas and electricity markets will stimulate more bottom-up approaches among increasingly integrated neighbouring and integrated regional markets within Europe. These spontaneous developments can efficiently be used to improve EU energy policy-making, and translated into a model of Standards of Security of Supply. Such a model would improve transparency and confidence among the MS each other energy policy-making.

In the study on 'Energy Supply Security and Geopolitics' which was prepared for the European Commission's directorate for transport and energy (DGTREN), CIEP recommended developing standards for EU and Member States (MS) energy supply security because "more efficient, more flexible and tailor-made choices for Member States and their specific energy security needs and their specific dependencies are possible". (CIEP, 2004; p.27). Such standards would allow for an integrated and bottom-up approach to energy security rather than the fuel-by-fuel and top-down approach prevailing in current energy-policy making. Rather, the use of standards could help overcome the lack of a common security of supply framework because it creates transparency about national energy balances, exposure to certain risks and the policies that attempt to avert these risks at a national level. Thus, it could show the MS the advantages of cooperation and perhaps harmonization of certain security of supply policies. Until now, these discussions were immediately set in a context of transferring competency to the EU level. Instead, the standards could facilitate the review and assessment of the supply security of the entire EU's as well as MS's individual medium and long term energy-balances. Such a review process is proposed as the Strategic EU Energy review (EC, 2006).

In the last three years ECN has published several studies in the field of quantifying supply security aspects (Jansen et al., 2004; Scheepers et al., 2004; Van Werven et al., 2005; Van Oostvoorn (ed.) 2003; Kessels and Bakker, 2005). Based on this earlier work, in July 2005 CIEP and ECN were invited by the Dutch Ministry of Economic Affairs to further elaborate their ideas on a system of energy supply security standards. In October 2005 CIEP and ECN presented an outline for the development of such a system and the ministry subsequently commissioned CIEP and ECN to carry out a study, which should include both the standards as well as the procedures to implement them. The objective being to reinforce coherence and efficiency of the EU and MS's energy policies through a process of consultation and coordination between MS and the European Commission on the basis a set of agreed upon standards. CIEP and ECN jointly published the result of this work in June 2006 (Scheepers et al., 2006). During the second half of 2006, discussions were held with various experts at various levels and from a number of EU member states. This resulted in new inputs in and new arguments for CIEP and ECN thinking. As a consequence, the standards model was further elaborated and somewhat expanded. In addition, the model has been applied for all 27 EU member states, using the most recent relevant input data. Furthermore, parts of the June report have been updated, taking account of more recent developments.

The study continues to aim at providing an instrument to help to the EU and MS to shape and adapt their energy policies with a view to supply security. It could, more in particular, be useful in the context of the Strategic EU Energy Review as proposed by the EU Commission in its 2006 Green Paper on EU energy policy (EC, 2006) and as published in January 2007 (EC, 2007). This is further discussed in Section 2 of this study. Section 3 then elaborates the proposed concept of energy security of supply standards. It explains the role of indicators in the standards, followed by a description of the process for developing them. Moreover, the use of SoS standards in a review process of energy supply security is elucidated. Section 4 discusses the indicator to address short term risks and to be used in SoS standards: the Crisis Capability Index. The indicator that has been developed for the more longer term is the Supply/Demand index (S/D index) by which the medium and long-term security of supply can be assessed. This is presented and discussed in Section 5. In Section 6 the use of the S/D index is further illustrated with examples for the EU-27. Section 7 continues with the more qualitative issue of multilateral action, followed by a possible combination of the two Indices in Section 8. The report concludes in Section 9 with some final remarks.

The Appendices A to C provide additional details on the S/D Index model, its data used and quantifications.

2. The EU context

The recent Green Paper from the EU Commission is again drawing attention to the fact that energy import dependencies for the EU as a whole are increasing. The increasing import dependency has contributed to the recent elevation of energy on the political agenda of both the EU and the MS. Figure 2.1 gives an indication of these developments, with overall energy import dependency rising as much as up to 60% in the next 25 years.

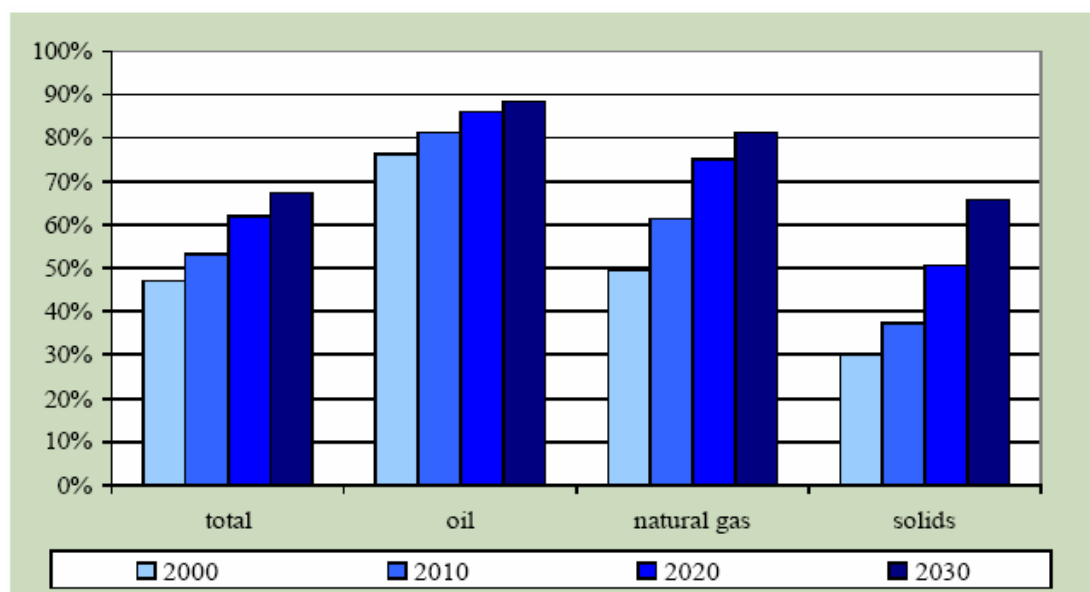


Figure 2.1 *EU energy import dependencies*
Source: Green Paper, EC (2006).

Taking a closer look at the various elements of the EU's energy policy, a number of observations could be made. EU energy policy basically has three objectives, i.e. securing energy supply continuity, securing properly functioning energy markets and promoting energy efficiency, energy savings and the promotion of new and renewable energy sources. This latter objective must also be seen in the context of the environmental impacts of energy production and energy consumption. Two of these three objectives are based on a more concrete setting and legal framework. EU energy markets find this setting not only in the EU Treaty itself and its articles on competition, but also in the 2003 Energy Directives and its further implementing building blocks. The same is to be noted for the environmental policy setting, with the Kyoto-commitments and the Emission Trading System (ETS) as major implementing devices together with various directives and EU policy instruments for regulating emissions, energy efficiency and renewable energy.

It should be noted that, so far, a consistent set of instruments for the overall energy supply security, as well as a procedure for consultation and discussion is absent. On a sector basis there are some important legal and policy commitments, such as for an oil supply emergency and to a lesser extent for natural gas. However, an overall framework for the full energy balance is lacking. It would therefore be appropriate to consider such a framework in order to effectively assess supply security policies for the EU as a whole and to improve their consistency and coherency with the other two main objectives of EU energy policy, without immediately having to address the competency issue. The process of Strategic EU Energy Reviews presents such opportunities. This review has the ambition to "offer a clear European framework for national

decisions on the energy mix, analysing advantages and drawbacks of different sources of energy.... and the knock-on effects of these changes for the EU as a whole.”

Such an EU policy review process, based on a common and objective framework where national policies could be discussed and reviewed, would be facilitated by using common pre-agreed criteria in the context of an overall outcome for energy supply security. This process could take place on a country-by-country basis, where each MS should use the common framework reporting its national situation. Outcomes then could be assessed in a common peer process, not only for the member states concerned but also for its impact on the EU as a whole. The process could lead then to policy adjustments and if needed or desired, even with quantitative targets. Though the framework and criteria for supply security will basically focus on energy supply issues, it could be possible to link them to environmental standards as well, such as CO₂ emission reduction targets.

Security of Supply (SoS) assessments can be based on quantitative indicators reflecting the energy supply security situation of the EU and its member states. This paper describes the development and use of a security of supply indicator that is based on a MS's or the EU's supply and demand structure and can be used for assessing today's energy security as well as energy supply security in the mid (10 years) and longer term (20 years). Furthermore, in a review process the capability of the EU and Member States to accommodate short-term supply interruptions can also be included in the assessment. Therefore, the framework proposed should include a crisis capability indicator. In addition, generic or specific policies for enhancing external supply security could be added as well in the framework. The next section elaborates the proposed framework in some more detail into a concept for EU Standards for Energy Supply Security.

3. The concept of energy supply security standards

A security of supply risk refers to a shortage in energy supply, either a relative shortage, i.e. a mismatch in supply and demand inducing price increases, or a partial or complete disruption of energy supplies. The supply shortage or disruption affects the energy consumers that were supposed to receive the supplies. From the consumer's point of view it is less relevant what causes the supply shortage or disruption and which part in the supply chain is giving the trouble. A secure energy supply implies the *continuous uninterrupted availability of energy at the consumer's site*. Therefore, a review of energy supply security should include all possible causes of supply shortages and disruptions and comprehend the total supply chain. A supply interruption or physical shortage (limited availability) will have consequences for the consumer, but also the supplier is affected and there are indirect effects for the economy and society as a whole.

Security of supply risks can be managed in the short term and in the long term. On the short term, shortages and unforeseen supply interruptions could be caused by technical and operational factors, by natural events as well as by human factors, but also by market distortions and by geopolitical tensions. These short term risks could be assessed together with policies to mitigate the short term impacts. Mitigation measures are emergency stocks, fuel switching, demand rationing and reserve capacities. The probability of an energy supply risk and the impact on economy and society depends to a large extent on the structure of the energy system (fuel mix, origin of primary energy sources, energy transport infrastructure, conversions into secondary energy, energy demand etc.). Changes in the energy system structure will influence a MS' security of supply risk, i.e. in the future the probability and the impact of a sudden shortage can be different from today. A review of MS' energy security should relate to the short term risks as well as the changes of these risks in the longer term.

The concept proposed is one that is focussing on a process:

- A process for a strategic EU policy review; for discussion, evaluation, assessment, review and adaptation wherever necessary.
- A process that is based on a common and objective framework where national policies could be assessed using common pre-agreed criteria in the context of an overall outcome for energy supply security.

The concept consists of two quantitative indicators and some qualitative considerations. Because demand and supply structures cannot be changed in a short time, one quantitative indicator is dealing with the energy demand and energy supply structure in the medium and longer term (the Supply/Demand Index or S/D Index). The other indicator deals with the capability of an energy system to accommodate short-term interruptions (this is the Crisis Capability Index or CC Index). The more qualitative considerations include, securing long-term supplier/consumer relations between different states by effective energy diplomacy, participation in joint projects on political, economic and energy cooperation and joint actions to protect and safeguard vulnerable transport routes for oil and gas. Willingness and/or capability of a member state could be included as a notion for participation in these multilateral actions.

In this process that has to be seen in the wider context of an overall common EU energy policy, SoS indicators can be used as a measure to indicate a desired state. This desired state could be determined for individual member states or the EU as a whole. When the indicators are used in a normative way, they become a SoS Standard. They would then have the character of a 'regulatory tool'. In this way the SoS Standard could even be developed into an absolute value, eventually to be determined on the basis of a cost-benefit analysis. In case of a supply crisis the social costs (e.g. high energy prices, loss of economic growth etc.) will be

come high if the level of the Standard is poor. On the other hand increasing the SoS level will entail costs. An optimal SoS level can be determined by the balance of, on the one hand, the estimated avoided social costs and the risk of a supply crisis and, on the other, costs for enhancing SoS (Mulder, 2003).

The alternative could be to use the concept as a ‘policy tool’, where standards are used in the context of a framework to discuss, review, assess and where necessary adapt, the energy SoS of individual MS, or a regional group of MS’s or the EU as a whole. The standards are then used as criteria or benchmarks for assessing the security of energy supply and are aiming at government behaviour, at policies. Such standards can, for example, indicate a minimum level of energy supply security of an individual EU MS relative to the average level of security of supply of the EU as a whole. In this way it can be used to stimulate member states with a relative poor energy supply security situation to take extra policy measures. A further option is to use the standards as a policy target for a future situation compared to a historical situation. The EU can for example decide that the level of SoS in the future should not become lower than the level of SoS in the past.

In our approach, where we are focusing on a process, the idea of using standards for SoS as a policy tool seems to be the most appropriate. In such a process we would further distinguish between a conceptual phase and a more operational one. Especially the conceptual phase is relevant for the two quantitative indexes we propose. These two indexes, the Supply/Demand Index and the Crisis Capability Index, will be based on a number of objective and subjective criteria. In Section 4 this will be discussed in more detail for the CC Index and in Section 5 for the S/D Index. During the conceptual phase, EU Member States will discuss the different quantitative factors. These include the objective ones based on energy statistics, and the more subjective ones, based on informed expert opinions. In addition there are a number of scoring rules as well. This conceptual phase will be characterised by negotiations with political and policy oriented considerations.

In the second, operational phase the new tool will be applied and used in a review process. The SoS standard(s) can be used at EU level, for EU member states individually, but also to assess the supply security situation for a sub-region of a few EU member states. Both the current energy supply security can be assessed as well as future situations using energy scenarios such as the EU Trends to 2030 (EC, 2006b). Moreover, specific policies can be assessed with use of the SoS standard(s), for example: can the supply security be improved by a certain change in fuel mix? Such a ‘what-if’ type approach can be done both on a national and on a European level. It is in this phase that the SoS standards could be applied in the context of the EU Strategic Energy Review.

However, it is stressed that companies and consumers will remain primarily responsible for the (short-term) security of their own energy supplies, making sure that they invest and contract for energy in a timely manner. Governments are responsible for national energy balances and fuel mixes. The use of a shared framework for assessing the energy situation in MS will also uncover the impact of national policy choices on the EU energy market. Moreover, it is also important to stress that compatibility and compliance with existing emergency arrangements and commitments under the IEA Treaty remain part of this proposed policy review and assessment process.

Lastly, if the EU should wish to embark on a review process based on standards, it is recommended that the whole process be provided with a legal basis. A basis that would set the procedure, define the inputs and data, determine responsibilities and boundary conditions and procedures and periodicity. Such a legal basis could help to maintain the required level of compatibility and transparency and is perhaps best structured in a Council regulation. The Commission could set the values that are employed after a comitology procedure. But again,

before starting a process of legalising the idea, an in-depth consultative process should be recommended, where various inputs, attributes and rates are analysed and tested.

4. The Crisis Capability Index

This Section describes an indicator for the assessment of the capability to mitigate an energy supply security crisis. Short-term actions and short-term results are the main items to be addressed, being more a question of weeks than one of months. The indicator combines an assessment of a Member State's risk to be confronted with sudden supply interruptions and its potential impacts (Risk Assessment: RA) and the capability of that country to mitigate these impacts (Mitigation Assessment: MA). If the risk is high, more emphasis should be put on effective crisis capabilities than when this risk is low.

4.1 The Risk Assessment

For assessing risks of sudden and unforeseen supply interruptions the main elements of the energy system will be considered. Domestic production, imports, conversion and transport will all be assessed for their different risks of short-term interruptions. Primary domestic energy production (oil, coal, gas and renewable energy sources), could have various degrees of risks for interruptions. Production could take place in difficult and remote areas, or with installations that are becoming obsolete or meeting operational problems for whatever reason. Environmental restrictions or accidents could be part of the assessment. Import risk assessments could be more specific, dealing with politically inspired interruptions for oil and gas, with sea transport risks when choke points are passed. Political interventions, but also accidents could create sudden supply interruptions. Transit routes over land for oil, gas and electricity also have their vulnerabilities, where again both political and accidental causes could create interruptions.

Power generation as such could also be subject to unforeseen shortfalls. A large dependence on climate based intermittent sources such as wind or hydro, but also environmental restrictions for using open surface cooling waters could lead to these interruptions. Technology risks could also play a role, especially if several units are deploying the same specific new technological devices and a serious incident occurs in one of them. This could be specifically relevant for nuclear power plants. Similar events could happen in oil refineries or in LNG-terminals and regas-facilities. Here again, climate factors could trigger activity interruptions, such as have happened with the 2005 hurricanes Rita and Katrina in the US Gulf. Social conflicts such as strikes of refinery workers or blockades of these facilities can interrupt the supply of transport fuels. Energy transmission and distribution networks could also add to the risk of supply interruptions, where maintenance (including wood management) or poorly managed operational procedures could be determining factors.

Table 4.1 shows a checklist for risk assessment for sudden supply interruptions. The different elements of the energy system are grouped into five categories covering energy production, import, conversion and transport. For each element three types of risks are distinguished: (1) technical and organisational factors, (2) human factors (incl. human failures and deliberate actions such as terrorist attacks) and political factors and (3) natural events. Each individual cause for a sudden supply interruption risk listed in the checklist should be assessed on the basis of the probability of such a risk and the impact of this risk on the energy system and on society. The risk can be valued with a figure indicating no (0), low (1), medium (2) or high risk (3). Not all energy system elements are of equal importance in a country's energy supply. Therefore, for each element the risk assessment score is multiplied, dependent on the category, by the relative share in primary energy sources (PES), final energy demand (FED) or total energy import. Adding the individual values together and multiplying the total by 100/48 results in the Risk Assessment sub-index (a value between 0 and 100).

4.2 Mitigation & Emergency measures

Measures to handle or to manage short-term sudden supply interruptions are in place in many MS. This is partly due to international commitments such as the IEA Treaty and partly due to national contingency planning. The measures should be summarised in five groups, i.e. strategic or emergency stocks, demand restraint (including rationing), fuel switching capabilities, reserve capacity and locked-in production capacity. Describing measures is one thing: testing and verifying them is another one, where a distinction should also be made between national and international test runs (including the IEA⁵). Here again, the MS should come with an informed description of its Mitigation Package, where the various measures should be listed on the basis of an ex ante set checklist.

With respect to oil emergency stocks, there is the EU requirement to maintain strategic stocks covering 90 days of oil consumption⁶. With respect to other emergency stocks, there is no international commitment for gas, but there may be specific national provisions for short-term interruptions. However, there is an EU-procedure requiring consultation and eventually common action in case of sudden gas supply interruptions⁷ and there are also proposals from the Visegrad-countries⁸ to establish a regional scheme for securing gas supplies in a crisis situation. With respect to coal, there have been EU-rules in the past, requiring power plants to hold a minimum level of 30 days of coal stocks, but this requirement was terminated in the mid 1980s. With respect to uranium there have been attempts in the past to set up strategic stocks for (enriched) uranium, but this has never been accepted by MS.

With respect to demand restraint & rationing devices, IEA members have the option to use these measures in the case of an oil emergency. In addition, the IEA has provided a menu for options to introduce short-term conservation measures, especially during an oil emergency⁹. Restraining demand in an emergency situation is very complex in modern societies. Leaving this to the market could be the most economic option, but from a political viewpoint this is highly unlikely. Measures that were effective in the past, such as Sunday driving bans, would create numerous difficulties. Rationing procedures, pro rata obligatory delivery cuts or priority schemes could be feasible, but would need political choices as to priority setting. These options are relevant for both electricity supply and supply of transport fuels. An alternative might be the use of interruptible contracts (gas) or demand response contracts (electricity), where both the supplier and the consumer could use the option to interrupt or restrain deliveries and either lay down their activities or make use of alternative energy options. In essence, effective demand restraint measures could help secure energy supply at the level of the consumer market, by fair allocation of available supplies for all consumers.

⁵ Not all EU-25 members are member of the IEA (Poland, Slovenia, Slovakia, the 3 Baltic States, Malta and Cyprus), so some provision has to be taken into account for this.

⁶ EU Directive 68/414 as amended in 1998.

⁷ EU Directive 2004/67.

⁸ Poland, Hungary, Slovakia and the Czech Republic.

⁹ Saving oil in a hurry; IEA/OECD, Paris 2005.

Table 4.1 Checklist risk assessment for sudden supply interruptions

Category	Element in energy system	Risk factor	Weight (1)	Score 2)	Value	
Domestic primary energy production	Domestic oil production	Technical/ Organizational factors	Norm. share oil in total PES production	0-1-2-3	v1	
		Human / political factors		0-1-2-3		
		Natural events		0-1-2-3		
	Domestic natural gas production	Technical/ Organizational factors	Norm. share gas in total PES production	0-1-2-3	v2	
		Human / political factors		0-1-2-3		
		Natural events		0-1-2-3		
	Domestic coal (Solids) production	Technical/ Organizational factors	Norm. share coal in total PES production	0-1-2-3	v3	
		Human / political factors		0-1-2-3		
		Natural events		0-1-2-3		
	Domestic renewable energy production	Technical/ Organizational factors	Norm. share renewable in total PES production	0-1-2-3	v4	
		Human / political factors		0-1-2-3		
		Natural events		0-1-2-3		
Energy conversion	Power plants	Technical/ Organizational factors	Norm. share electricity in total FED	0-1-2-3	v5	
		Human / political factors		0-1-2-3		
		Natural events		0-1-2-3		
	Refineries	Technical/ Organizational factors	Norm. share oil (proxy transport fuels) in total FED	0-1-2-3	v6	
		Human / political factors		0-1-2-3		
		Natural events		0-1-2-3		
	Gas Pipelines	Technical/ Organizational factors	Norm. share gas in total FED	0-1-2-3	v7	
		Human / political factors		0-1-2-3		
		Natural events		0-1-2-3		
	Electricity lines	Technical/ Organizational factors	Norm. share electricity in total FED	0-1-2-3	v8	
		Human / political factors		0-1-2-3		
		Natural events		0-1-2-3		
Energy import	Oil production abroad	Technical/ Organizational factors	Norm. share oil import in total energy import	0-1-2-3	v9	
		Human / political factors		0-1-2-3		
		Natural events		0-1-2-3		
	Natural gas production abroad	Technical/ Organizational factors	Norm. share gas import in total energy import	0-1-2-3	v10	
		Human / political factors		0-1-2-3		
		Natural events		0-1-2-3		
	Electricity production abroad	Technical/ Organizational factors	Norm. share el. import in total energy import	0-1-2-3	v11	
		Human / political factors		0-1-2-3		
		Natural events		0-1-2-3		
	Energy import transport	Sea transport routes gas	Technical/ Organizational factors	Norm. share LNG import in total energy import	0-1-2-3	v12
			Human / political factors		0-1-2-3	
			Natural events		0-1-2-3	
Sea transport routes oil		Technical/ Organizational factors	Norm. share oil import by sea in total energy import	0-1-2-3	v13	
		Human / political factors		0-1-2-3		
		Natural events		0-1-2-3		
Land transport routes gas		Technical/ Organizational factors	Norm. share pipeline gas import in total energy imp	0-1-2-3	v14	
		Human / political factors		0-1-2-3		
		Natural events		0-1-2-3		
Land transport routes oil (pipeline)		Technical/ Organizational factors	Norm. share pipeline oil import in total energy impo	0-1-2-3	v15	
		Human / political factors		0-1-2-3		
		Natural events		0-1-2-3		
Land transport routes electricity	Technical/ Organizational factors	Norm. share el. import in total energy import	0-1-2-3	v16		
	Human / political factors		0-1-2-3			
	Natural events		0-1-2-3			
				Total	RAV	
				Max	48 (16 x 3)	
				RA Index	(RAV/48)*100	

1) PES: Primary Energy Source; FED: Final Energy Demand
 Share = normalised share within the category sub-group, add up to 1 for each category
 2) no risk: 0; low risk: 1; medium risk: 2; high risk: 3.

Fuel switching capabilities could be seen as an alternative to demand restraint. Switching from one energy source to another for the same installation could then mitigate further supply shortfalls. This could especially be the case for large energy users that have dual-firing capabilities. Partly or temporarily softening environmental restrictions could be necessary to make effective use of these options. A country may either have policy in place to promote or enforce fuel switching, but practical realities and technological boiler specifications that are limiting broad quality ranges of fossil fuel usages are increasingly restricting short-term fuel switching in a number of countries. Here again, the country concerned could indicate in its standard the option of fuel switching capacity, however not in terms of theory, but in proven practicable terms.

As to production capacity, a distinction is made between reserve capacity available in the sub-surface energy supply system and (underground) locked-in energy production. Reserve capacities for electricity could be found in power generation capacity (including mothballed capacity or allowing more flexible use by softening environmental limits) and in interconnections with additional import capacity (for instance by allowing more imports when temporarily operational safety limits are softened). For gas, reserve capacity could also be found in transmission lines, allowing temporarily more flexibility. For oil products, refinery runs could be changed allowing for instance more production of transport fuels.

Increasing locked in energy production, using system flexibility or other various forms of spare domestic production capacities could be very interesting as well. These additional productions have to exist, however, which is becoming less likely in tightening overall supply situations. If they do exist, they will very often require special conditions, both in economic and in environmental terms. Under the IEA emergency scheme, oil producers such as Norway and the UK were allowed to use these options in meeting their emergency obligations. The same was true for the US with their Naval Petroleum Reserves. Gas production might also be increased in the short term, as is still the case in Norway or the Netherlands. But here again, decreasing gas production in the medium term will put further limits on these options.

Table 4.2 shows the checklist that can be used to assess the Mitigation Program. If a measure is implemented this measure will be rated with '1'; if it is not available the value will be '0'. The value will become '2' if the measure is implemented and tested, i.e. the measure should have been demonstrated in practice or procedures should have been tested. The scores are multiplied by the share relative share in primary energy sources (PES) or final energy demand (FED) similar as in the Risk Assessment checklist. The value of this Mitigation Assessment (MA) sub-index can be calculated when the total score of the checklist is multiplied by 10, resulting in an index value between 0 and 100.

Table 4.2 Checklist for assessment of measures to mitigate sudden supply interruptions

Category	Element in energy system	Weight 1)	Score 2)	Value	
Emergency stocks	Oil	Oil stocks	w1	v1	
	Coal (incl. Peat)	Coal (Peat) stocks	w2		
	Gas	Gas stocks (LNG and UGS)	w3		
Demand restraint and rationing	Electricity	Demand response contracts	w4	v2	
	Gas	Rationing procedures	w5		
		Interruptible contracts	w6		
	Transport fuels (oil based)	Priority users	Norm. share gas in total FED		0-1-2
		Rationing procedures	Norm. share oil-based transport fuels in total FED		0-1-2
		Other procedures			0-1-2
Fuel switch capabilities	Electricity	Multi fuel capacity (i.e. oil/gas) power plants	w7	v3	
	Heat	Multi fuel capacity (i.e. oil/gas) industrial boilers	w8		
	Electricity	Import capacity	w9		
Reserve capacity	Gas	Generation reserves	0-1-2	v4	
	Oil	Reserve capacity transmission pipelines	w10		
		Spare capacity for production transport fuels	w11		
Locked-in production	Oil	Domestic oil production	w12	v5	
	Coal (incl. Peat)	Domestic coal (incl. Peat) production	w13		
	Gas	Domestic gas production	w14		
			Total	Mav	
			Max	10 (5 x2)	
			MA index	Mav/10*100	

1) PES: Primary Energy Source; FED: Final Energy Demand

Share = normalised share within the category sub-group, add up to 1 for each category

2) not available: 0; implemented: 1; implemented and tested: 2.

Whether a country has an adequate capability to handle sudden energy supply interruptions can be judged by comparison of the Mitigation Assessment (MA) sub-index to the Risk Assessment (RA) sub-index. Although this comparison does not say anything about the capability of a country to mitigate specific supply interruptions, it gives an overall indication of how well a country is prepared in comparison to its risk exposure. If the RA sub-index is much higher than the MA sub-index the country may be vulnerable for sudden supply interruptions, i.e. the Crisis Capability (CC) Index has a value of less than 100. The CC Index can be calculated with the formula:

$$\text{If } RA > MA: \text{ CC Index} = MA/RA \times 100$$

If the RA sub-index is similar to or lower than the MA sub-index the crisis capability of a country may be sufficient in comparison to the probability and impact of sudden supply interruptions. In that case the CC Index will be 100. It should be noted that if the MA sub-index is much higher than the RA sub-index the costs associated with crisis capability measures may be exceeding the probability and costs of sudden supply interruptions.

4.3 Using the CC Index

After the initial development of the Crises Capability Index, the index has been applied for the Netherlands. The Dutch results were discussed with policymakers in an international workshop¹⁰. Furthermore, the CC Index was discussed in Ireland with policy makers and energy sector experts. The practical experience and comments received resulted in an improvement of the RA and MA checklists. Suggestions were also made on how the CC Index best could be used. These experiences give some directions of how to use the CC Index.

Procedural issues

A country's energy crisis capability can best be assessed in a joint meeting with policy makers, energy industry experts and other relevant stakeholders. Assigned responsibilities for energy supply security in national oil supply crisis procedures and those that are laid down in national gas and electricity legislation could give guidance for the selection of these experts and stakeholders. A joint meeting has the advantage that supply risks and mitigation measures of different energy sectors (i.e. oil, gas, and electricity) are assessed in comparison with each other. Information taken from national studies on energy supply risks, a handbook on oil supply disruptions and contingency measures, procedures to guarantee sufficient power generation reserves, procedures to guarantee gas supply security, etc. can all be used for the assessment. A complicating factor could be that detailed supply risk information is sometimes classified information for reasons of national security.

Risk assessment

The risk assessment includes the probability of specific risks as well as the impacts of these risks. The impacts comprehend the direct effects for consumers and producers and indirect impacts on the national economy and society as a whole. It is sometimes difficult to separate risks from mitigation measures. Redundancy of components and back up systems are reducing the risks of supply interruptions. These measures to mitigation risks should be taken into account when the assessment is carried out, i.e. the remaining risk for supply interruptions should be assessed.

Each item in the risk assessment may receive a value between 0 and 3 (no risk: 0; low risk: 1; medium risk: 2; high risk: 3). Determining the value for each item could be a subject for discus-

¹⁰ On November 29, 2006 CIEP and ECN organized a workshop on the EU Standards for Security of Supply. Policy makers from France, The Netherlands and Ireland discussed the overall approach and the S/D Index and CC Index. Also comments and suggestions were received from the UK.

sion. If a specific item does not exist in a country's energy system, there is no risk and the value should be 0. If an item is of limited importance, this will appear from multiplying by the relative share. Giving a value for a specific item should therefore be only related to the risk probability and their effects. It could be helpful to focus the discussion on the comparison of risks between different system element and categories. This is also important for consistency of the risk assessment.

Assessment of mitigation measures and programs

Determining values for the mitigation assessment (not available: 0; implemented: 1; implemented and tested: 2) is more straightforward. Answering the following questions can give some guidance:

- Is the mitigation measure/program described in detail and are responsibilities clearly assigned to specific organizations and institutions (e.g. TSOs for gas and electricity)?
- Have persons/organizations/institutions implemented the procedures for measures to mitigate energy supply risks?
- Where procedures recently used in practice or have they being tested?

Use of the results

Although the CC Index approach has only being used on a limited scale, the experience so far showed that policy makers can obtain a good insight in the energy supply crisis risks and mitigation capabilities. The results of the CC Index and the values of the two assessments should be used carefully. The two assessments clearly show where a country's energy system is the most vulnerable or where mitigation measures might be inadequate. Publication of this information might harm national security and can bring responsible organizations or institutions in a difficult position.

The results of the calculated CC Index cannot be used for comparison between different EU MS, because for measuring supply security risks, their effects and the effectiveness of mitigation measures, no objective data and standardized procedures are available in the EU. However, in a review process EU MS could report on the use of the CC Index. This could be used for discussion on mutual assistance.

5. The Supply/Demand Index

5.1 Security of Supply Indicators

Quantitative indicators describing energy supply security are often focusing on the energy supply of one or several primary energy sources (Jansen et al., 2004; Blyth and Lefevre, 2004). An assessment of energy supply security should however also include energy demand. Energy security may be affected by strong increase of energy demand due to economic growth, whereas energy-saving policies may improve the energy security situation. Furthermore, the end-use of energy is to a large extent based on secondary energy carriers such as electricity, gas, transport fuels and heat. The supply security of end users also depends on the capacity and reliability of energy conversion installations (e.g. power stations, refineries, etc.) and energy transmission and distribution networks.

The Supply/Demand Index (S/D Index) for review and assessment of energy security of supply in the medium and longer term should therefore include all three parts of the energy system: final energy demand, energy conversion and transport and primary energy supply.

5.2 The S/D Index Model

For the calculation of the S/D Index a computer model has been developed including a database for input parameters. The model represents the energy demand and supply structure of an EU Member State, the whole EU or a sub-region of the EU. Figure 4.1 shows the model structure. Transparency of the model is essential for the discussions in the conceptual phase (see Section 3). Therefore, on the one hand sufficient relevant aspects are included, but on the other hand the development of a too complex model has consciously been avoided.

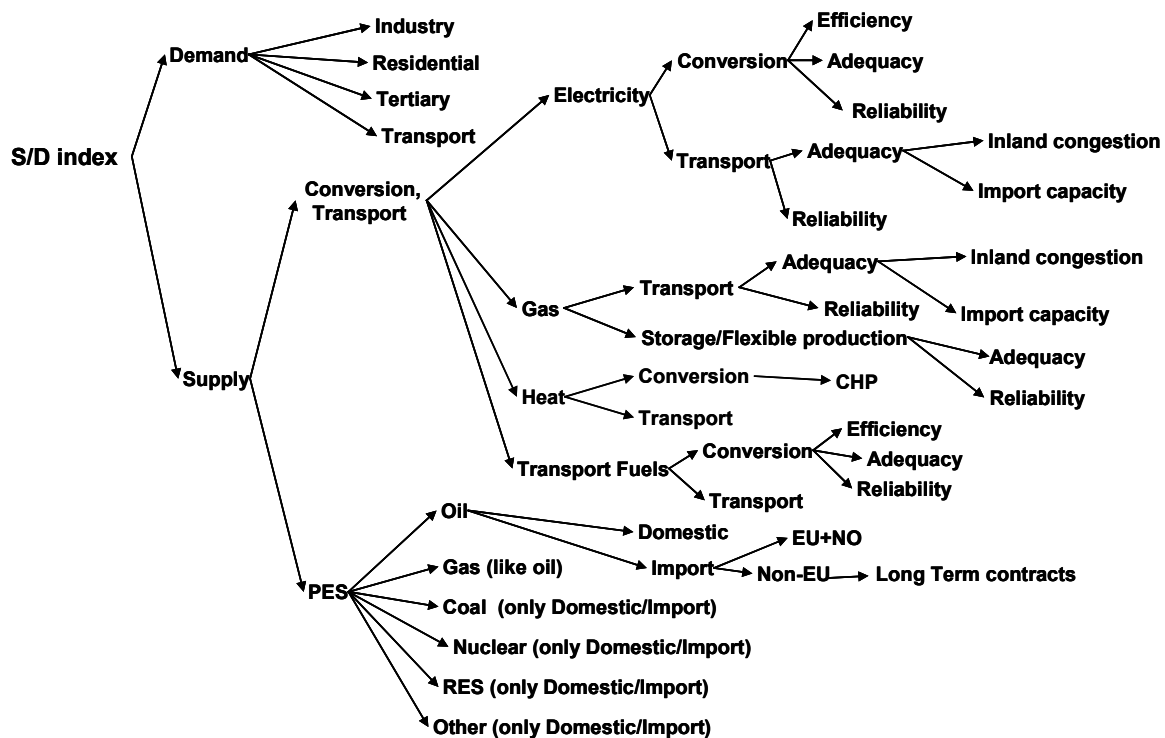


Figure 5.1 *The Supply/Demand Index Model Structure*

The S/D Index Model uses four types of inputs:

1. *shares* of different types of supply and demand,
2. *values* characterising capacity and reliability,
3. *weights* determining the relative contribution of different branches of the model,
4. *scoring rules* determining the index value of each individual aspect contributing to the S/D index.

The first two types of inputs are objective and based on physical parameters of the energy system. Shares are used for energy demand and for primary energy sources, resulting from the energy balances. These can be taken from statistical data or scenario forecasts. The values used are further explained for demand in Section 5.3, for primary energy sources in 5.4 and, for conversion and transport, in 5.5. The latter two, weights and scoring rules, are of a more subjective nature and based on expert judgement. Weights are used for the relations between the supply and demand outputs and for the relations between conversion & transport and primary energy sources. In addition, a weight factor has been given to the relation between long-term and short-term non-EU imports for oil and gas. The weights parameters are approached in relation to the perceived vulnerability: more weight with increasing vulnerability. Scoring rules are also further explained in Sections 5.3, 5.4 and 5.5 and in Appendix A. All these parameters can be varied to a certain extent and will be subject of discussion in the conceptual phase. However, one should realize that the degree in which parameters can be varied is limited by rational argumentations. In Appendix C.3.6 a sensitivity analysis is therefore discussed showing to which extent differences in expert judgement can influence the S/D Index.

Each individual aspect used in the model (i.e. at the end of the branches) will have an index value between 0 and 100. The next sections discuss in more detail the calculation method of the individual indexes for each of the three parts of the model (energy demand, conversion and transport, primary energy sources). Default values for weights determining the relative contributions of the individual index values to the overall S/D Index are listed in Figure 5.2. Objective shares are coloured in red, and subjective weight factors are coloured in blue.

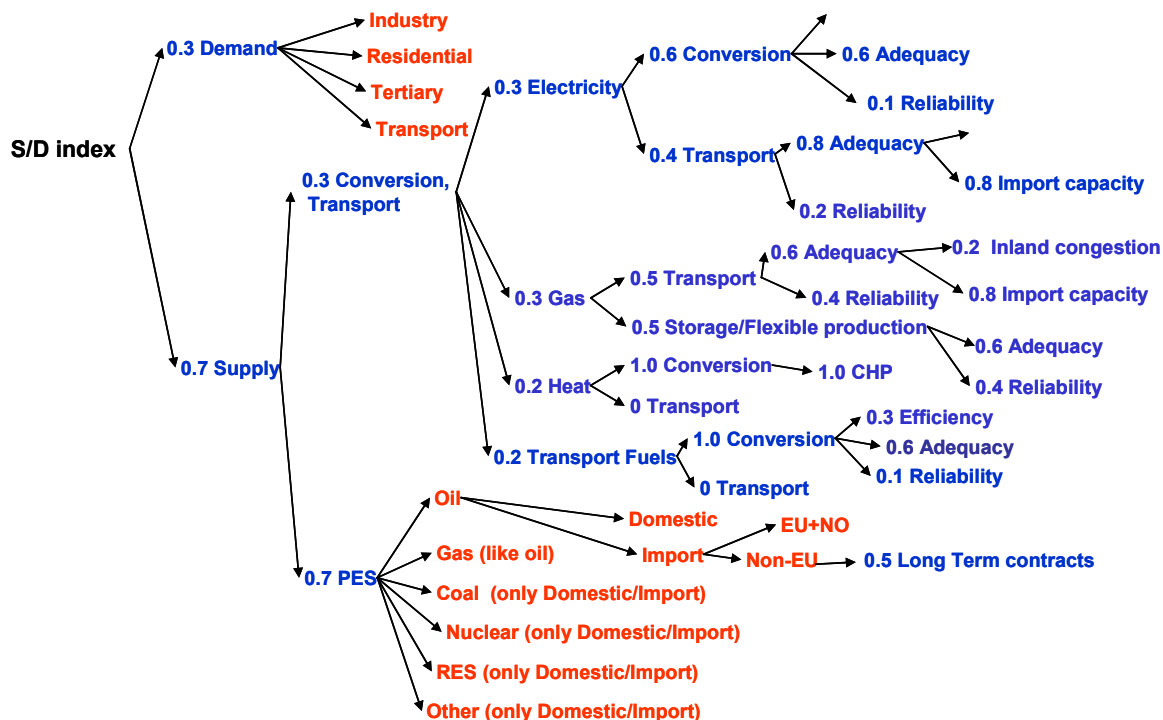


Figure 5.2 Weights (defaults) and shares used in the Supply/Demand Index Mode

5.3 Essential Energy Demand Needs

As explained above the S/D Index Model takes into account the final energy demand, i.e. the amount of electricity, heat and transport fuels used by energy consumers. For assessments of energy supply security in the future the energy demand in a business-as-usual scenario could be used in the model. However, the index should in particular value the degree in which the energy demand is kept as low as possible, i.e. the energy demand level should be compared to the ‘essential energy demand needs’ warranted by the energy supply. As parameter to indicate the essential energy demand needs the energy intensity factor has been chosen. Energy intensity, either in terms of energy used per capita or per € GDP is gradually declining over time, both EU-wide as well as in most Member States. It is an indication of increasing energy efficiency, a trend that is expected to continue in the future (see Figure 5.3). This factor could also be regarded as an indicator for the effect of continuing energy conservation programmes.

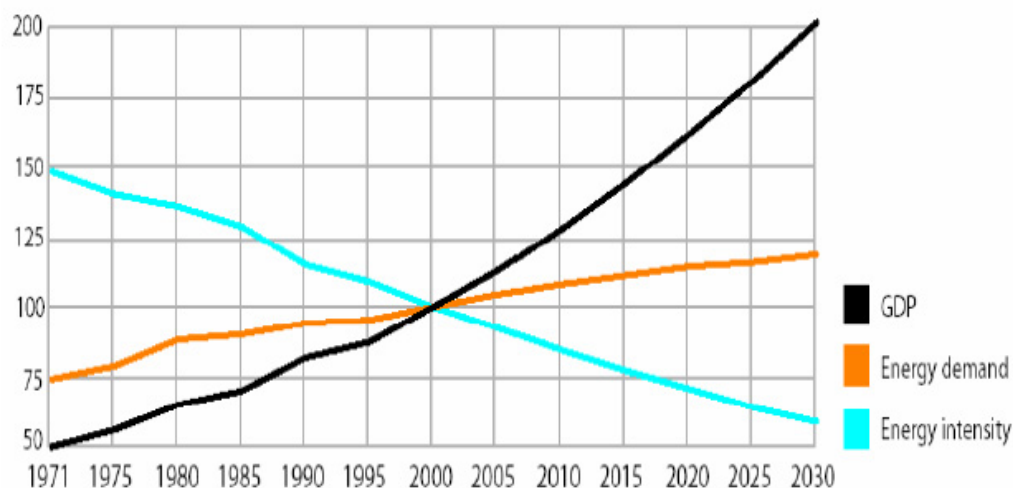


Figure 5.3 *Long term EU development of GDP, energy demand and energy intensity (2000=100)*

Source: (EC, 2006).

The S/D Index Model uses four energy intensity factors to allow for differences in Member State demand structures:

1. Energy intensity of the residential sector (ton-oil-equivalents/capita).
2. Energy intensity on added value for the industrial sector (ton-oil-equivalents /M€).
3. Energy intensity on added value for the tertiary sector (ton-oil-equivalents /M€).
4. Energy intensity for the transport sector (ton-oil-equivalents /M-ton-km for goods and ton-oil-equivalents /M-passenger-km for passengers).

For the essential energy demand needs benchmark values are used per energy demand sector. The benchmark is the average figure of energy intensities of the five best performing EU Member States. Corrections are not made for climate differences (residential sector), differences in energy intensive industries (industrial sector) and population density (transport sector), because the index should indicate the vulnerability of energy demand sectors for energy supply constraints. It will also keep the model simple and more transparent.

The index value for each energy demand sector is calculated from the ratio between the EU's or Member States' energy intensity and the benchmark figure. Weighing the four sectoral indices with the shares of each demand sector relative to the total final energy demand, results in an index value for energy demand.

Some consideration could be warranted for alternative approaches, such as using Kyoto commitments or energy conservation targets as a reference for essential energy demand needs. With Kyoto targets, it is possible to determine total energy demand based on fossil energy supplies. There would be some political advantage as these commitments are the product of a wider and more global negotiated context, but they would have to be supplemented by a factor for non-fossil fuels. This could be done on the basis of production targets for renewable energy and, where appropriate, for nuclear energy. Moreover, the development of CCS (Carbon Capture & Storage) would bring additional complexities. The other idea would be to use targets for energy conservation, which would cover all energy demand and make no difference as to how it is met by supply. Using targets in the two alternatives would create numerous flaws based on a variety of interpretations and definitions. Therefore, due to these many practical limitations, the energy intensity approach is the preferred one.

5.4 Primary Energy Sources

For assessing the security of primary energy supply, the S/D Index Model distinguishes a number of factors:

- Domestic primary energy production versus imports from other EU Member States.
- Imports from the EU (including Norway¹¹) versus imports outside of the EU.
- Imports from outside of the EU warranted by long-term contracts versus short-term contracts.

It could be argued that in terms of energy supply security no distinction should be made between domestic energy supplies and those coming from other EU countries, since the internal market should assure non-discriminatory trade and respect of import contracts. However, it has to be noted that political and public perceptions differ from formal legality. As a consequence, for instance, questions are raised whether existing import contracts for gas or power should always be honoured, even in times of immediate shortfalls. Although in response to these questions politicians assured not to interfere in existing contracts when there are short-term supply interruptions, the model allows for making a slight difference in rating supply relations that are purely national versus those that are intra-EU based.

Energy trade relations for imports from outside the EU will also be based on contracts, i.e. on the rule of law, and sometimes on multilateral or bilateral treaties. EU energy imports are basically covering crude oil, oil products, gas (including LNG), coal, uranium and renewables (mainly biomass). It would seem that the last three energy sources do not ask for a specific assessment because of a sufficiently diverse supply base from a number of secure sources. With respect to oil and gas the S/D Index model distinguishes between import from EU Member States and supply from outside the EU. This does not only arise from heavy geographic concentrations of these energy sources, but also from the increasing awareness of geopolitical concerns that are adding to supply risk perceptions. Although several methods are available allowing for differences in geopolitical circumstances in supply regions, it was decided not to make further refinements in this respect, because of the poor data availability on future supply origins and in order to avoid a too high degree of complexity. On the other hand, it could be argued that oil and gas supplies based on long-term contracts will give higher assurances of interrupted supply in comparison to short-term contracts. Oil and especially gas that is coming from areas where national oil or gas companies together with international energy companies have made some heavy long-term investments, and thus have created strong economic interests in secure and reliable long-term energy flows, could be considered as more secure because it is mitigating supply risks for consumers and demand risks for producers. These contracts usually have some relation with government involvement, possibly as part of multilateral actions as described in Section 7. Therefore, the model allows for this type of differentiation.

The factors above are included in the calculation of the index for primary energy sources. For the six primary energy sources the following calculation rules apply (see also Figure 5.2):

- Nuclear energy will have a value of 100 irrespective of the supply origin because supply risks for uranium are relatively low.
- Because coal, renewables (mainly biomass) and other energy supplies will be sufficiently diversified, the index has a minimum value of 70 if the total supply is imported and will increase proportionally with decreasing imports. Some may argue that coal is at least as good for the security of supply as nuclear; in that case the minimum score for coal would be 100. In the case for the Netherlands, a specific sensitivity analysis has been performed and reported in Appendix C.

¹¹ Norway is since 1994 legally committed through the Agreement on the European Economic Area (EEA) to apply the EU's energy market rules. This being the case, there is no reason to treat energy imports from Norway different from imports from within the EU.

- In the original model of the S/D Index as reported in (Scheepers et al., 2006), the index for gas and oil will be zero until the net share of domestic supplies exceeds a level of 30%. In this update the threshold of 30% is lowered to 0% following suggestions from policy makers that commented on the ‘2006’ report. Above this level the index will increase proportionally with increasing domestic supplies. The threshold will become lower when the share of long-term contracts in non-EU imports increases (i.e. in Figure 5.4 the point of intersection of the gas/oil line with the x-axis will move to the left or even move to the y-axis, similar as for coal and nuclear, see also Appendix A.2.2).

The index value for primary energy sources is calculated on the basis of the index value and the relative share in the total primary energy supply of each of the primary energy sources.

It should be noted that the establishment of the minimum levels mentioned above are also part of the conceptual phase of the process for a strategic review. The levels reported here should be considered as illustrative.

From a supply security perspective it could be argued that the domestic energy reserve situation should be included in the S/D Index. An adequate energy resource management may be a contributing factor to a Member State’s energy security. Furthermore, if a Member State makes natural resources available for other EU Member States the energy supply security of the EU will benefit. However, including energy reserves and resource management policies will result in a higher complexity and less transparency of the model. Alternatively, national energy reserves and resource management policies may become visible in the S/D Index when the model is used in a scenario approach with different time frames (see also Section 6.2).

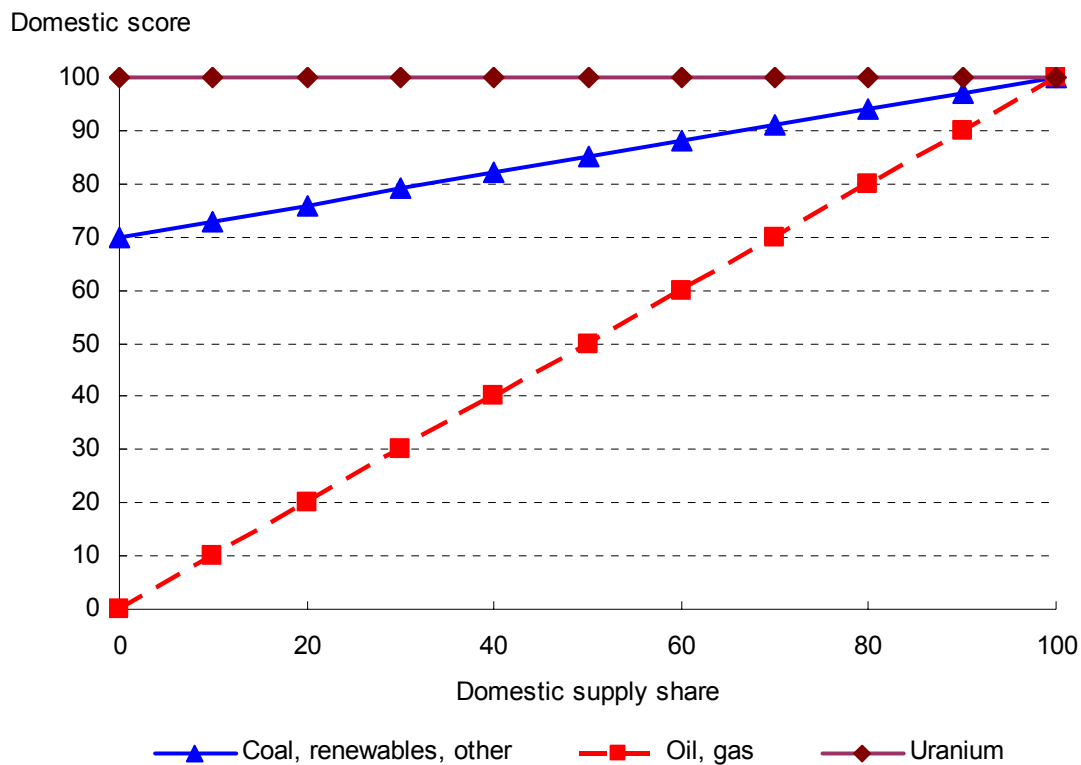


Figure 5.4 *Index values for primary energy sources as a function of the net share of domestic supply*

5.5 Energy Conversions and Transport

Whether final energy demand can be covered by primary energy sources depends on the adequacy and reliability of energy conversion and transport infrastructures. The S/D Index Model distinguishes three secondary energy carriers: electricity, heat and transport fuels (see also Figure 4.1). Moreover, the efficiencies of energy conversion are taken into account, since higher efficiencies will reduce the supply requirements. For rating indices for energy conversion and transport aspects a number of rules have been developed. However, for some aspects reliable data is lacking, in particular in future energy scenarios, or the aspects are seen to be affecting energy supply security to a lesser extent. For reasons of consistency these aspects are kept in the model, but the default value is set to 100. These aspects are: power generation reliability, adequacy for the inland electricity network, electricity network reliability, heat transport, refinery reliability and fuel transportation.

The index value for energy conversion and transport aspects are rated as follows:

- *Efficiency power generation*: if the average electricity generation park efficiency is less than 35% the index value is zero. The index value is 100 if the average efficiency is 50% or above. Between 35% and 50% the index value is proportional. These values are based on the present state of the technology.
- *Power generation adequacy*: the index value is based on the so-called reserve factor, i.e. the power generation capacity exceeding the level of peak demand. If the reserve factor is 1.2 or above the index value is 100. The index value is zero when the reserve factor is less than 1 and proportional if the reserve factor is between 1 and 1.2. These values reflect present industry practices, including the role of mothballing.
- *Power generation reliability*: The default index value is 100, assuming that on average the reliability of power plants is sufficient. Alternatively, the power generation reliability can also be included in power generation adequacy.
- *Electricity network adequacy*: The index value for import capacity consists of combining a value relating import capacity to domestic capacity and one including a reserve factor including both domestic and import capacity. The import capacity value is proportional to a ratio between 0 and 5%, and the value for the 'combined' reserve factor is proportional if its value lies between 1 and 1.2. Instead of the 5%, one could also choose the so-called 'Barcelona target' (EC, 2003b) according to which interconnection should cover at least 10% of a Member State's installed capacity.
- *Electricity network reliability*: For this component statistics on network reliability in terms of the average time of outages per year can be used. However, data on future network reliability is not available. For the moment the default index value is 100.
- *Gas transport adequacy*: The sum of import capacity and domestic production should be sufficiently high in relation to the gas demand. This ratio should be higher than a predefined criterion in order to be adequate for sufficient supply in peak type situations, see for more details Appendix A.3.3.
- *Gas transport reliability*: Analogous to the electric network reliability, the default value is set to 100.
- *Gas storage/flexibility adequacy*: The scoring rule and criterion aims to address mainly the flexibility provided by storage only (by Underground storage, UGS, and by LNG) and domestic production, and the flexibility needed on a daily basis i.e. the adequacy to supply the peak day demand in a specific year. The flexibility that may be covered by import capacity has already been assessed as part of the gas transport/adequacy branch, and addresses seasonal flexibility and variations. Flexibility through domestic production is rather limited as most Member States are gas importing countries. With the Netherlands, United Kingdom and Denmark as exceptions of Member States with a large domestic production share, the storage/flexibility scoring rule includes mainly UGS and LNG.
- *Heat generation efficiency*: The boiler efficiencies are not used here because of lacking information on this aspect. But even more relevant for efficiency of heat production is the share of heat generated by combined heat and power (CHP). However, since these figures

are difficult to acquire, the share of CHP in electricity generation is used instead. The index value is proportional to this share and will reach the value of 100 when 25% of national annual electricity production is generated by CHP, a figure reflecting national practice in the Netherlands and Denmark.

- *Refineries efficiency*: The efficiency of refineries is determined by the ratio of the energy value of transport fuels and those of crude oil and biofuels, due to the importance of oil products for the transport sector. The fuel efficiency in terms of crude oil (and biofuels) input versus oil products output is relatively high (typically about 94%) and not really discriminating. Moreover, supporting data cannot be obtained easily; therefore, a score of 100 is assigned in all cases. Otherwise, a similar rule such as for power generation efficiency could be applied.
- *Refineries adequacy*: The index value is 100 if the refinery capacity in use is 80% or lower compared to the total domestic refinery capacity. If this figure exceeds the value of 95% the index value is dropping to zero. Between these two figures, which again reflect industry practice including mothballing, the index value is proportional to the ratio of refinery capacity in use.
- *Fuel transportation*: The capacity for transporting automotive fuels will seldom be constrained, because there are several alternatives (by truck, ship, train or pipeline). Therefore the default index value is 100.

6. The Supply/Demand Index for the EU-27 and individual Member States

In this section the use of the S/D Index is illustrated with examples for the EU-27 and the Member States for the years 2005 and 2020. The examples are based largely on objective information contained in energy balances, derived from mainly Eurostat (Eurostat, 2006) and IEA statistics (IEA, 2006) and the ‘EU Trends to 2030 - update 2005’ baseline scenario (EC, 2006b).

For this analysis input data was used from the following sources:

- *Energy demand intensities* were taken from the Odyssee database (Odyssee, 2006) and Eurostat (Eurostat, 2004; 2006).
- Data on *energy conversion and transport aspects* were taken from a variety of sources including UCTE (UCTE, 2005a; b), the Dutch TSO (TenneT, 2005), the EC baseline scenario (EC, 2006b), EC Benchmarking reports (EC, 2005b) and IEA (IEA, 2002; 2005; 2006).
- Statistical data from Eurostat (Eurostat, 2004; 2006) and from the most recent EC baseline scenario (EC, 2006b) was used for the *primary energy sources*.

The S/D Index model combines the information of the data sources with weighing factors and scoring rules. The most important uncertainties are scrutinised by some sensitivity analyses that are reported in more detail in Appendix C. The base case results for the years 2005 and 2020 are presented in Sections 6.1 and 6.2, respectively.

6.1 Today: 2005

The results for the year 2005 representing ‘today’s situation’ are displayed in Figure 6.2, ordered by SoS position: the higher the S/D index value, the better the SoS position.

The average value of the S/D index in 2005 is about 56. The range is from 82 (Denmark) to 25 (Cyprus). The differences between MS are mostly caused by differences in the PES (Primary Energy Sources) parts, caused by both the relatively large spread in the PES sub-index (ranges from 0 to 97, average of 53), see Table S.1 and the relative high weight of the PES sub-index (0.49) in the total S/D Index. Member States with high import dependencies for oil and gas, combined with high shares of these imports originating from outside the EU/Norway, have a relatively low score, i.e. an S/D Index below 50. Such MS include: Cyprus, Luxembourg, Malta, Latvia, Greece, Lithuania and Portugal. On the other hand, MS that are net exporting for gas and/or oil have a relatively high score, i.e. an S/D Index of 60 or higher. Examples are Denmark (82) and the United Kingdom (80). In addition, MS that are net importers but mainly from within EU/Norway also get high scores. An example is Ireland (75), and to a lesser extent Sweden (70). The Netherlands (69) has a high score due to being a net gas exporter. Romania (70) has relatively low import dependencies for oil and gas, added to moderate shares of coal/nuclear in its PES mix. France (64), Czech Republic (64), Germany (63) and Poland (60) have high scores due to their large shares of nuclear and/or coal in the PES mix. As most of the largest MS (Germany, France, United Kingdom) are part of the best scoring MS, the EU-27 aggregate score is also relatively high (65).

For a selected number of Member States, Figure 6.3 shows the underlying Sub-indices. Such a graphical display may provide more insight into the rationale of the overall S/D Index values.

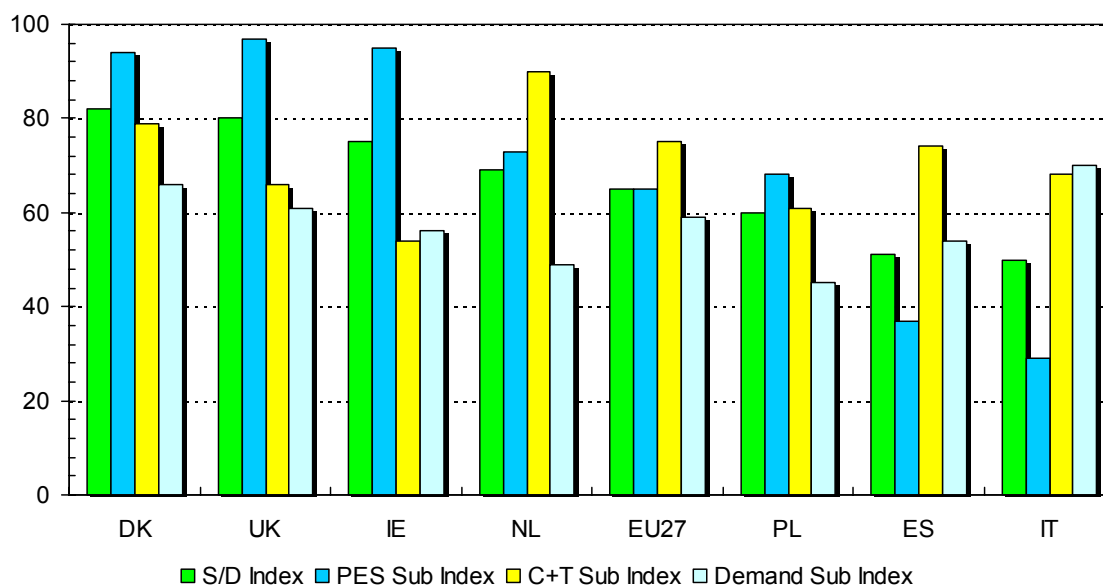


Figure 6.1 *Today's S/D Index and main Sub-Indices for a selected number of Member States*

For the same selected number of Member States, even more detailed results of the analysis are presented in Table 6.1. For the six Member States and the EU-27 two columns are shown. For the upper half of the table, the first column lists weights and shares of final demand and the primary energy mix explaining the contributions of sub-indices to the overall S/D Index value. The second column shows the S/D Index and the major sub-indices. For a review of energy security supply the sub-indices for demand, supply, energy conversion and transport (C+T) and primary energy sources (PES) are at least as important as the S/D Index (the bold figures in Table 6.1). In addition, the 'scores' on the lowest level of detail in Table 6.1 provide even more detail on the relative strengths or weaknesses affecting the overall S/D Index or sub-indices.

The lower half of the table highlights the PES import dependencies and the origins of the imports of oil and gas. These figures explain the scores of the PES parts in the upper half of the table.

Appendix A and B give a further description and explanation of the methodology and data used.

Table 6.1 *Today's S/D Index for energy supply security for a number of selected EU MS and the EU-27*

	EU-27	DK	ES	IE	IT	NL	PL	UK
	Weight/ share	Index	Weight/ share	Index	Weight/ share	Index	Weight/ share	Index
S/D index								
Demand								
Industry	0.3	65.4	0.3	51.0	0.3	49.5	0.3	60.2
Residential	0.29	54	0.34	39	0.33	56	0.33	27
Tertiary	0.25	48	0.15	88	0.22	60	0.30	64
Transport	0.15	77	0.11	87	0.13	100	0.18	21
Supply	0.31	63	0.40	54	0.33	79	0.19	95
C+T	0.7	68.2	0.7	48.2	0.7	40.8	0.7	64.7
C+T	0.3	75.1	0.3	73.8	0.3	67.8	0.3	55.9
Electricity	0.3	60	0.3	63	0.3	44	0.3	68
Gas	0.3	97	0.3	83	0.3	59	0.3	44
Heat	0.2	67	0.2	84	0.2	84	0.2	71
Tr. Fuels	0.2	72	0.2	67	0.2	100	0.2	40
PES	0.7	65.3	0.7	37.2	0.7	29.3	0.7	68.5
Oil	0.37	35	0.47	8	0.49	5	0.23	2
Gas	0.24	65	0.18	9	0.35	38	0.13	34
Coal	0.18	89	0.16	79	0.08	70	0.58	100
Nuclear	0.14	100	0.12	100	0.00	100	0.00	100
Ren. ES	0.07	100	0.08	100	0.06	100	0.06	100
Other	0.00	100	0.00	100	0.02	100	0.00	100

	EU-27		DK		ES		IE		IT		NL		PL		UK	
	Import dep.	Outside-EU/NO	Import dep.	Outside-EU/NO	Import dep.	Outside-EU/NO	Import dep.	Outside-EU/NO	Import dep.	Outside-EU/NO	Import dep.	Outside-EU/NO	Import dep.	Outside-EU/NO	Import dep.	Outside-EU/NO
Oil	85.7	76.1	-109.7	0.0	109.2	92.0	102.0	2.8	98.6	96.1	141.7	69.3	98.4	99.2	-23.9	26.9
Gas	52.6	67.5	-66.6	100.0	99.2	91.9	80.7	0.0	79.2	78.8	-49.5	0.0	72.2	90.8	-4.3	0.0
Coal	37.5		100.0		68.6		72.1		100.0		100.0		-29.8		61.8	
Nuclear	100.0		100.0		100.0		100.0		100.0		100.0		100.0		100.0	
Ren. ES	0.0		0.0		0.0		0.0		0.0		0.0		0.0		0.0	
Other	0.0		0.0		0.0		0.0		0.0		0.0		0.0		0.0	

Notes: Member States that are net exporters of oil or gas have negative import dependencies (marked in red in lower half of table)

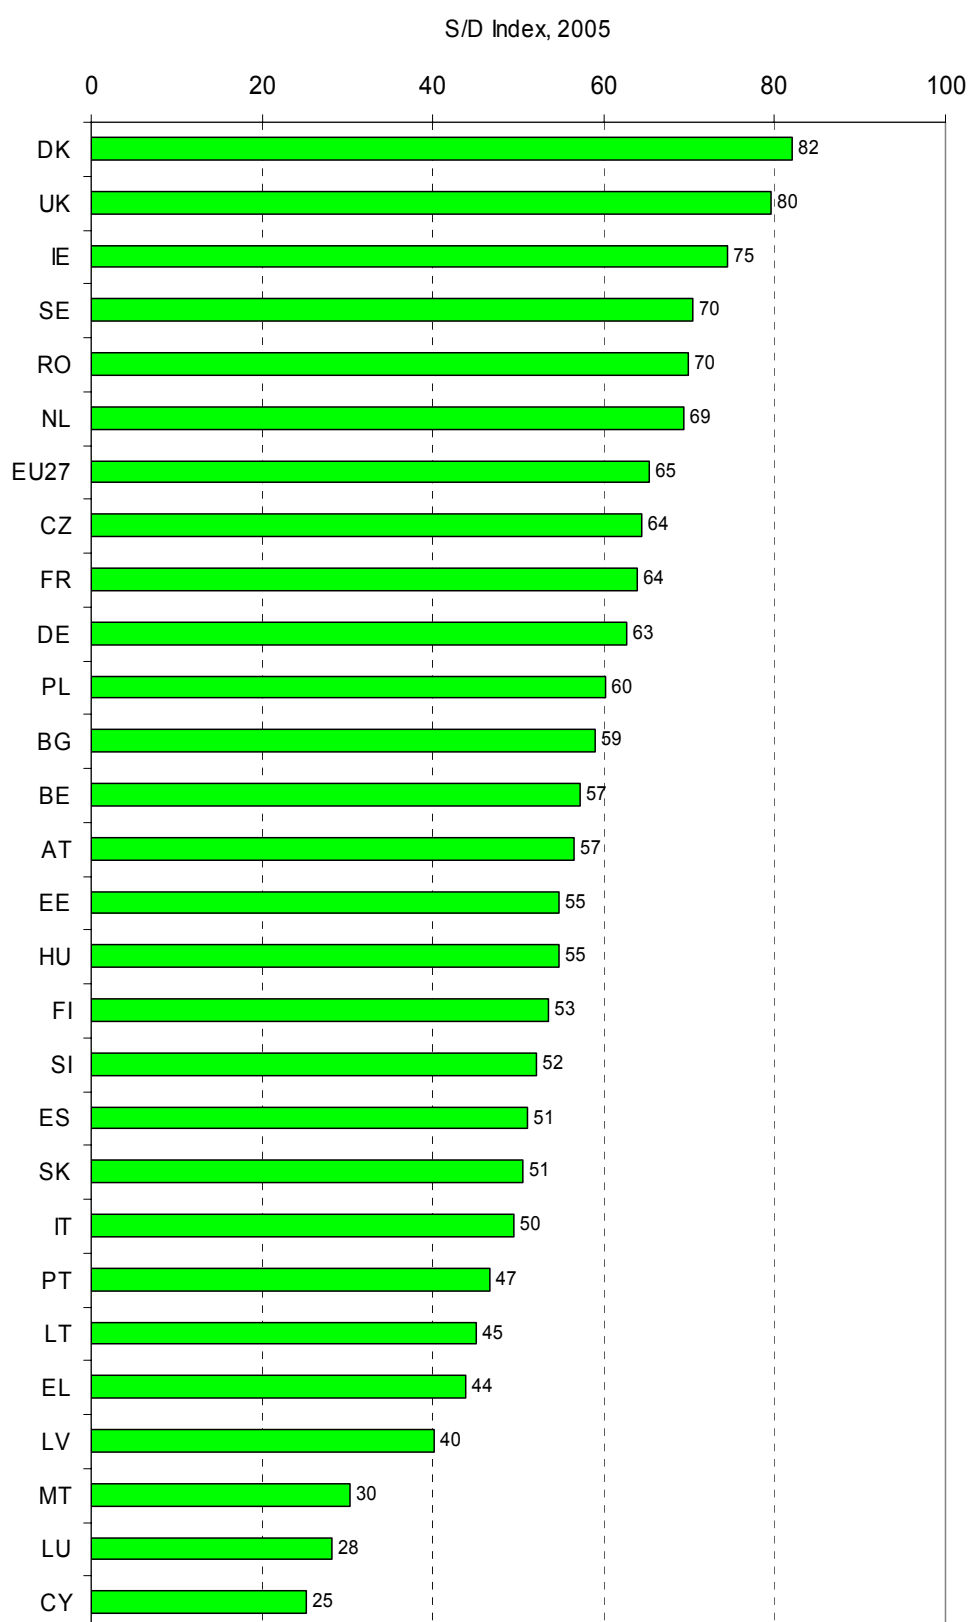


Figure 6.2 *S/D Index, EU-27 and Member States, 2005*

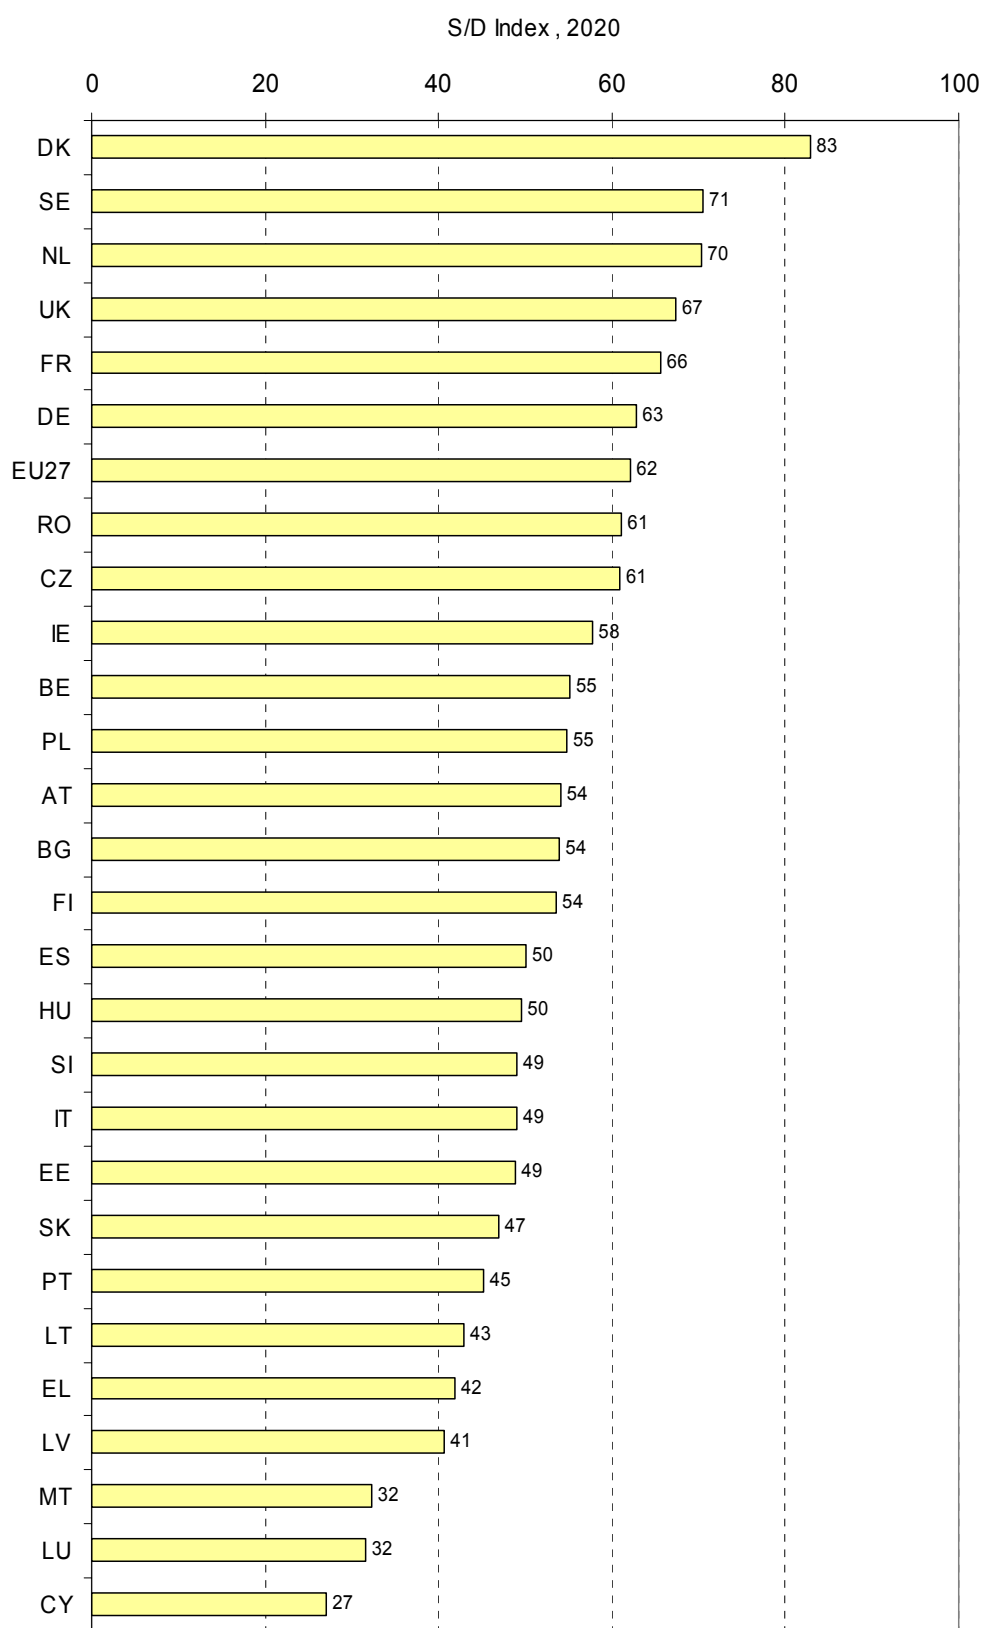


Figure 6.3 *S/D Index, EU-27 and Member States, 2020*

6.2 2020: Using the ‘Trends to 2030’ scenario

The base case results of the recently updated ‘Trends to 2030’ scenario (EC, 2006b) were used to calculate the S/D Index values for the year 2020 with the purpose of comparing the situation in 2005. The results for the 2020 S/D Index are displayed in Figure 6.3. For a review of energy security supply the Sub-indices for demand, supply, energy conversion and transport (C+T) and primary energy sources (PES) are at least as important as the S/D Index. Therefore, Table 6.2 shows the detailed results including these Sub-index values at the PES, C+T and Demand level, ordered by Member State.

On average, the S/D Index decreases by almost 3 points compared to 2005 (from 56 to 53), mainly caused by a decrease in the PES sub-index (decrease of 6 points). So, the SoS position is somewhat less in 2020 than in 2005. The division into low/intermediate/high scoring MS does not really change when compared to today’s situation (compare Figure 6.2 with Figure 6.3). In an absolute sense, Ireland and the UK observe the largest decrease in S/D Index (17 and 13 points, respectively), but both remain as relatively high scoring MS in 2020¹². PES sub-index scores decreases are generally caused by higher import dependencies in 2020 and higher shares of imports from outside EU/Norway. For some MS, a combination of increasing shares of gas and decreasing shares of coal/nuclear also contribute to a decrease in the PES sub-index, and hence in the S/D Index. Some examples of this latter effect are Belgium, Estonia and Poland. The C+T (Conversion and Transport) sub-index increases on average (almost 5 points) due to the improved overall efficiency of electricity generation and higher shares of CHP in electricity production. Changes in the Demand sub-indices are moderate, which on the one hand reflects a ‘moving’ benchmark value based on the best performing MS, and on the other hand, a stand-still of the residential energy intensity benchmark. On average, a decrease of 2 point is observed, mainly due to a higher intensity of the residential energy intensity.

Table 6.2 *S/D Index and Sub-indices, base case update S/D Index Model*

	S/D Index	Primary Energy Sources	Conversion and Transport	Demand
EU-27-2005	65.4	65.3	75.1	58.7
EU-27-2020	62.1	56.1	82.7	57.4
EU-27-2030	64.3	56.4	85.4	62.5
BG-2005	59.0	60.4	74.6	45.8
BG-2020	53.9	51.4	82.1	38.3
AT-2005	56.6	44.6	85.5	55.8
AT-2020	54.1	39.0	89.7	53.9
BE-2005	57.2	61.9	61.1	46.9
BE-2020	55.1	51.8	73.3	47.7
CY-2005	25.1	4.4	42.5	46.7
CY-2020	27.0	5.8	43.5	50.0
CZ-2005	64.4	68.3	89.9	40.2
CZ-2020	60.9	60.9	92.2	38.9
DE-2005	62.7	64.9	60.0	60.8
DE-2020	62.9	59.7	71.7	62.0
DK-2005	82.1	93.6	79.0	65.6
DK-2020	82.9	95.9	79.9	63.7
EE-2005	54.8	63.9	48.4	44.6
EE-2020	48.9	49.7	54.4	43.8
EL-2005	43.9	34.1	48.4	56.7

¹² For MS that are net exporters (e.g. UK) or that have low shares of imports coming from outside EU/Norway (Ireland) in the year 2005, a generic assumption has been imposed for the year 2020, as such origin data are not known from the scenario. It is assumed that 50% of the imports of oil and gas come from outside the EU/Norway. For the other MS, the origins of these imports have been assumed equal for 2005 and 2020.

	S/D Index	Primary Energy Sources	Conversion and Transport	Demand
EL-2020	41.8	29.5	53.6	53.7
ES-2005	51.0	37.2	73.8	57.6
ES-2020	50.1	34.5	79.4	54.9
FI-2005	53.4	61.5	51.5	41.6
FI-2020	53.6	61.9	51.5	41.6
FR-2005	63.8	67.8	57.4	61.8
FR-2020	65.7	69.5	61.3	62.5
HU-2005	54.8	49.0	78.3	47.8
HU-2020	49.5	39.9	80.3	43.5
IE-2005	74.5	94.9	53.7	55.8
IE-2020	57.8	58.9	58.0	55.8
IT-2005	49.5	29.3	67.8	69.8
IT-2020	49.0	31.1	67.3	65.6
LV-2005	40.2	31.6	51.8	46.1
LV-2020	40.6	35.0	55.1	39.7
LT-2005	45.1	25.5	60.3	66.6
LT-2020	43.0	22.9	65.7	60.0
LU-2005	28.2	11.2	67.7	28.2
LU-2020	31.7	15.9	70.5	30.2
MT-2005	30.4	0.2	31.8	78.6
MT-2020	32.2	2.5	33.5	79.9
NL-2005	69.4	72.9	90.0	49.2
NL-2020	70.4	75.0	91.4	48.2
PL-2005	60.2	68.5	55.9	49.6
PL-2020	54.8	58.1	60.6	45.4
PT-2005	46.6	27.3	70.7	61.3
PT-2020	45.2	26.8	74.1	55.1
RO-2005	69.9	77.1	86.2	46.9
RO-2020	61.0	63.2	86.3	39.7
SE-2005	70.4	87.5	49.0	57.3
SE-2020	70.6	79.1	64.0	61.2
SI-2005	52.2	49.5	73.0	41.8
SI-2020	49.1	42.9	75.4	40.7
SK-2005	50.6	47.5	80.4	34.8
SK-2020	47.0	42.1	82.3	30.1
UK-2005	79.6	97.0	66.2	60.5
UK-2020	67.4	69.4	72.4	60.8

6.3 S/D Index and scenarios as benchmarking or policies comparison tools

It should be noted that the development up to 2020 may be rather scenario specific. Quantification of the policy scenarios, e.g. the ‘Scenarios on energy efficiency and renewables’, (EC, 2006c) rather than the baseline ‘Trends to 2030’ (EC, 2006b) scenario may give somewhat different results.¹³ In the previous report (Scheepers et al., 2006) other examples of the impact of using other (country specific) scenarios have been presented (for the Netherlands and the UK). For completeness, these results obtained with a previous version of the S/D Index and using other default values for some of the input parameters are still retained here in parts of Appendix C. The application of the (old) S/D Index for Ireland is another example (SEI, 2006).

¹³ For the EU-25 as an aggregate, five of these policy scenarios have been quantified in (Groenenberg, 2006) for the previous version of the S/D index model.

The S/D Index model can be used for benchmarking and comparison purposes. For the purpose of an inter MS comparison ('benchmarking of MS against each other or e.g. against an average or benchmark value'), comparison will only make sense if the same overall scenario is used for all MS. For the purposes of assessing the possible impact of different policies as resulting in different future developments of the energy system, comparisons for a specific MS or for the EU aggregate make sense. In that case, national MS specific scenarios can be used to observe the effects of changes in the energy system over time, and to assess how policy induced changes may have an effect on the energy system and how different policy options compare to each other. Moreover, changes in S/D index values can be compared to other effects, e.g. the CO₂ reduction over the respective time period (2005-2020).

7. Multilateral actions

Assessing and describing the third input to the SoS standards, a more qualitative approach will be followed for multilateral actions. With these policy actions national and/or European energy supply security will be promoted and enhanced. A distinction is made between the willingness of a MS and its capability, i.e. willingness to take, support or participate in actions together with other EU MS, be it in the context of a 'coalition-of-the-willing' or in a more formal EU context. Capabilities are based on the question if the MS has effective policy options or instruments at hand or not. Here again, this input will be based on a policy document to be submitted by each MS. This document will be subjected to a peer review. The multilateral actions could be further elaborated, with a distinction between three categories: effective energy diplomacy, participation in joint projects and actions and participation in military protection of vulnerable transport routes.

Effective energy diplomacy could be used to build stable relations with major energy suppliers. Such relations would probably require wider packages of mutual benefits and could even go beyond energy relations and programmes. Effective energy diplomacy would also mean periodical contacts and exchanges of views and information on issues that are of mutual interest. They could cover not only direct bilateral relationships, but also relevant issues in ongoing or forthcoming multilateral discussions elsewhere. Mutual trust, understanding and respect are keywords for the effectiveness of these actions, accepting that it may not always be possible to make public statements on them. Examples in the EU context could be seen in the producer-consumer dialogues that the EU is pursuing with OPEC, with Russia and with the Gulf states, but many MS are also using their own contacts and relations supporting overall energy supply security. The Green Paper from the Commission (EC, 2006) suggests the development of an EU external energy policy. If this were to be developed, it could be a strong tool of the multilateral actions as mentioned in this context. It could also be counterproductive, however, and limit effective national or regional actions. There is also a relation between the outcome of the S/D and CC Indexes, both nationally and for the EU as such. They could for instance have a positive or negative effect on the arguments for designing and agreeing upon effective multilateral actions. These indexes would then have a wider impact than just being inputs into a system of standards for EU energy SoS.

Participation in joint projects and more direct actions is a group of activities that could go beyond 'just talking'. Energy supply security could be part of wider packages of political, economic and/or energy cooperation, ranging from direct government financial involvements, including financial guarantee schemes, to political backing of private industry participations. The EU as such or within EU-coalitions could then secure energy supplies via long-term contracts embodied in political agreements. Such political umbrellas could be very effective, also using wider options for economic cooperation under multilateral frameworks such as the World Bank or relevant EU schemes.

Joint actions to protect or safeguard vulnerable transport routes for oil and gas are to be considered as a form of more direct intervention. Oil and gas, either as LNG or in pipelines, are crossing a number of choke points on their way to consumer markets. These points are critical and vulnerable for terrorist attacks and could require various forms of monitoring and protection in order to add to supply security. Police and or more pronounced military action could be considered necessary and this would probably necessitate joint actions by a number of countries. Coalitions of the willingness, actions in NATO or even in UN-frameworks would then probably be most appropriate, as the EU as such does not have a framework for this type of interventions. Willingness to support or even participate in these actions will always be related to explicit and sometimes controversial national political decision-making processes. Willingness is one thing;

capability is another thing, where various ranges of contribution could be foreseen, including monetary or direct military support actions.

As part of the standards process, each MS should be invited to prepare a policy statement on the three categories of multilateral actions. In this statement the MS will indicate its (un)willingness to participate in these actions, and if so under what conditions. Secondly, the statement should indicate, if applicable, the abilities of the MS to contribute to the actions. In addition, the statement should also discuss the impact the actions might have on the supply security situation of the MS itself and on other MS. On this basis synergies of actions could be assessed, national abilities could be benchmarked and further development of an effective external energy supply policy for the EU as a whole could be facilitated. One aspect of these actions has been translated in the S/D Index, giving a higher weight factor to non-EU imports based on long-term contracts. On the other hand, it should be realised that many of these actions might have a highly political nature and may be rather too sensitive for an open and transparent process. This could also mean that it would be difficult or inappropriate to develop a set of objective criteria for MS' policy assessments. It is important, however, to include the concept of multilateral actions in the standards-process and at least national policy documents should be prepared as inputs into the wider review and assessment procedures.

8. Towards an EU standard?

The previous chapters discussed the two more quantitative indexes and a more qualitative factor. The next question is whether or not to integrate these two inputs into a combined standard or to use them as separate ones for inputs into the policy discussions in the context of the strategic energy review process. In addition, one could also consider adding the qualitative factor when it comes to wider political assessments. Although this last factor could be translated into some quantitative factor¹⁴, the political judgement about multilateral action would always have to prevail.

If the first option were to be chosen, the standard would probably have to result in a normative process, culminating in a single EU norm for energy supply security. The energy policy of the individual MS and of the EU as a whole is then to be assessed in relation to the norm that is set. A less far-reaching approach would be to use the SoS standards in a benchmark process. The standards are then used for defining the EU average or some best policy practice outcome, after which national standards are assessed in relation to this average or best practice outcome. Policies could then be designed aimed at meeting the benchmark. The policy review option would maximise the political assessment process and could give room for further discussion and negotiations.

What direction is chosen, using combinations of EU standards for supply security for the assessment of the energy security situation, could have strong spin offs for related EU policies. Internal EU solidarity, either in the situation of an energy crisis, or in a more structural energy policy sense, could be further enhanced or challenged when the outcomes of the standards are discussed. Energy synergies or energy cost-efficiencies and their wider implications for economic structures in the EU could also play a role. Improving the energy supply security in one Member State could for instance be more effectively done by structural measures in another Member State. In the same context, mitigation policies for climate change could also be assessed. More generally, supply security standards could be further enhanced by linkage to Kyoto targets or even wider sustainability targets. This could ultimately evolve into standards for EU energy sustainability, which would help to come to a more balanced and integral approach for developing energy and environmental policies. It would be interesting to dedicate further research and studies to these wider issues.

If one would choose for a simple arithmetic approach, the two indexes could easily be combined. In arithmetic terms the S/D and CC Indexes are set as follows:

$$\begin{aligned} S/D \text{ Index} &= (0,3) \text{ demand value} + (0,7) \text{ supply value} \\ CC \text{ Index} &= MA/RA \times 100 \quad (\text{if } RA \leq MA \text{ } CC \text{ Index} = 100) \end{aligned}$$

Both indexes would never be higher than 'one hundred' and it should therefore be no problem to combine them in an SoS value. It could be done on a 50/50 basis, when considering both indexes as equally important. It seems to be more appropriate, however, to give a higher rating to the S/D Index than to the CC Index. This could reflect the importance of longer-term S/D balances in comparison with the much more short-term issues of sudden supply shortfalls. This higher rating could be done for instance on a one-to-two basis. This would then mean that the SoS value could be calculated accordingly:

$$SoS \text{ Index} = 2/3 S/D \text{ Index} + 1/3 CC \text{ Index}$$

¹⁴ This could be done by some simple arithmetic, on the proposed policy document, indicating degrees of discussion about it. (No document: zero, document with comment, 1 and with no comment 2).

The SoS Index would then result in a 0-100 scale, leaving room for choosing or arguing about a value for a standard. In this much more politically oriented process, the qualitative factor could be taken into account as well.

9. Concluding remarks

This report introduced the concept of SoS standards including a procedure, two quantitative indicators and possibly a qualitative one to be used in a broad assessment of energy supply security in EU MS and the EU as a whole. This broad assessment could be used as part of the wider EU Strategic Energy Review as proposed in the Green Paper of the European Commission. Although the use of the quantitative indicators was illustrated with some examples, the value of the procedure and indicators for EU energy policy should be demonstrated in practice. Practical experience will learn how the concept, the procedure, the quantitative model and the checklists can be further improved. However, it is unquestionable that a review process with assessments of EU MS' energy supply security in a well-structured way will become a valuable asset for a better understanding of the energy security of supply issue and factors that play a role in it. A good insight in the different factors and aspects is a precondition for the consultation between the Member States and the Commission with a view on the shaping of adequate EU policies on European energy security of supply.

References

- Blyth, W., N. Lefevre (2004): *Energy Security and Climate Change Policy Interactions - An Assessment Framework*, IEA Information Paper, Paris, December 2004.
- CBS (2005): *Renewable Energy in the Netherlands 2004* (In Dutch: *Duurzame energie in Nederland 2004*), Statistics Netherlands (CBS), Voorburg, ISBN 90-357-3066-6. <http://www.cbs.nl/>.
- CIEP (2004): *Study on Energy Supply Security and Geopolitics*, for DGTREN contractnumber TREN/C1-06-2002, Final report, Clingendael International Energy Programme, Institute for International Relations 'Clingendael', The Hague, the Netherlands.
- Correljé, A., C. van der Linde (2006): Study on Energy Supply Security and Geopolitics: A European perspective, *Energy Policy* 34, 532-543.
- CPB/RPB/MNP (2006): *Welvaart en Leefomgeving - Een scenariostudie voor Nederland in 2040* (In Dutch: 'Welfare and Environment - A scenario study for the Netherlands in 2040'), CPB/RPB/MNP, The Hague, September 2006.
- DTI (2005): *Secretary of State's First Report to Parliament on Security of Supply of Gas and Electricity Supply in Great Britain*, Department of Trade and Industry, UK, July 2005. Available from: www.dti.gov.uk.
- DTI (2006): *Our Energy Challenge - Securing clean, affordable energy for the long-term - Energy Review*, Consultation Document, DTI, UK, January 2006.
- DTI (2006b): *Gas Security of Supply - The effectiveness of current gas security of supply arrangements*, An Energy Review Consultation, Department of Trade and Industry, UK, January 2006. Available from: www.dti.gov.uk.
- ECN/MNP (2005): *Reference Projections Energy and Emissions 2005-2020*. ECN-C--05-018, the Netherlands.
- EC (2003): *European Energy and Transport Trends to 2030s*. European Commission, Directorate-General for Energy and Transport, ISBN 92-894-4444-4, Office for Official Publications of the European Communities, Luxembourg, 2003.
- EC (2003b): *Energy Infrastructure and Security of Supply*. Communication from the Commission to the European Parliament and the Council, European Commission, COM(2003) 734 final, 10.12.2003, Brussels.
- EC (2004a): *European Union Energy & Transport in Figures 2004*. European Commission, Directorate-General for Energy and Transport, ISBN 92-894-6244-2, Office for Official Publications of the European Communities, Luxembourg, 2003. Also available: http://www.europa.eu.int/comm/energy_transport/etif/index.html.
- EC (2004b): *European Energy and Transport Scenarios on Key Drivers*. European Commission, Directorate-General for Energy and Transport, ISBN 92-894-6684-7, Office for Official Publications of the European Communities, Luxembourg, September 2004. Also available: http://www.europa.eu.int/comm/dgs/energy_transport/figures/scenarios/index_en.htm.
- EC (2005): *Green Paper on energy efficiency - Doing more with less*, European Commission, COM(2005) 265 final, 22 June 2005.
- EC (2005b): *Technical Annexes to The annual report the implementation of the internal electricity and gas market*, European Commission, 2005.

- EC (2006): *Green Paper 'A European Strategy for Sustainable, Competitive and Secure Energy'*, COM(2006) 105 final, European Commission, Brussels, March 2006.
- EC (2006b): *European Energy and Transport Trends to 2030 - update 2005*. European Commission, Directorate-General for Energy and Transport, ISBN 92-79-02305-5, Office for Official Publications of the European Communities, Luxembourg, May 2006.
- EC (2006c): *European Energy and Transport Scenarios on energy efficiency and renewables*. European Commission, Directorate-General for Energy and Transport, ISBN 92-79-02652, Office for Official Publications of the European Communities, Luxembourg, July 2006.
- EC (2007): *An energy policy for Europe*, COM(2007) 1 final, European Commission, Brussels, January 2007.
- ECN (2006): Background report Energy of the study 'Welvaart en leefomgeving', in preparation, to be published on <http://www.ecn.nl/en/ps/>.
- EU (1998): *Directive 68/414 as amended in 1998*.
- Eurostat (2005): *The coal industry in the European Union in 2003 and 2004 - Impact of enlargement*, Statistics in focus - Energy and environment, 11/2005.
- Eurostat (2004): *Energy & Transport in Figures - Statistical pocketbook 2004*, ISBN 92-894-8464-0, Directorate-General for Energy and Transport, Office for Official Publications of the European Communities, Luxembourg.
- Eurostat (2006): *Energy & Transport in Figures - Statistical pocketbook 2005*, ISBN 92-79-00569-3, Directorate-General for Energy and Transport, Office for Official Publications of the European Communities, Luxembourg, or Excel files downloadable from <http://epp.eurostat.ec.eu.int/>.
- FCO (2004): *UK International Priorities - The Energy Strategy*, Foreign & Commonwealth Office (FCO), DTI, DEFRA, SEP. N.
- Groenenberg, H. (2006): *Energy security of supply under EU climate policies*, ECN-E--06-061, ECN, the Netherlands, December 2006 (forthcoming).
- IEA (2002): *Flexibility In Natural Gas Supply And Demand*, International Energy Agency, OECD/IEA, IEA Publications, Paris, 2002.
- IEA (2005): *The European Refinery Industry Under The EU Emissions Trading Scheme - Competitiveness, trade flows and investment implications*, IEA, Paris, November 2005.
- IEA (2006): *Natural Gas Information 2006 - with 2005 data*. International Energy Agency, OECD/IEA, IEA Publications, Paris, 2006.
- Jansen, J.C., W.G. van Arkel, M.G. Boots (2004): *Designing indicators of long-term energy supply security*, ECN-C--04-007, ECN, the Netherlands.
- Kessels, J.R., S.J.A. Bakker (2005): *Linking climate change and energy security policy in post-2012 climate strategies*, ECN-C--05-032, ECN, the Netherlands.
- Mulder, M. (2003): *Securing the supply of energy: A cost-benefit analysis*, CPB, the Netherlands.
- ODYSSEE: CD-ROM data to 2003, for EU-15 and Norway, <http://www.odyssee-indicators.org/>
- Scheepers, M.J.J., M.J.N. van Werven, A.J. Seebregts, J.P. Poort, M. de Nooij, B.E. Baarsma (2004): *A minimum standard for guaranteeing the balance between electricity demand and supply in the long term* [In Dutch: 'Norm voor leveringszekerheid: Een minimumnorm voor waarborging van het evenwicht tussen elektriciteitsvraag- en aanbod op lange termijn']. ECN/SEO, ECN-C--04-055, ECN, the Netherlands.

- Scheepers, M.J.J., A.J. Seebregts, J.J. de Jong, J.M. Maters (2006): *EU Standards for Energy Security of Supply*, ECN-C-06-039, ECN/CIEP, Petten/The Hague, the Netherlands, June 2006. Available at: <http://www.ecn.nl/docs/library/report/2006/c06039.pdf>
- SEI (2006): *Security of Supply in Ireland 2006*, M. Bazilian, F. O’Leary, B. Ó Gallachóir, M. Howley, Sustainable Energy Ireland, Energy Policy Statistical Support Unit, Dublin, December 2006.
- TenneT (2005): *Report monitoring security of supply 2004-2012 (In Dutch: Monitoring Leveringszekerheid 2004-2012)*, TenneT, Arnhem, the Netherlands, 29 April 2005.
- UCTE (2005): *UCTE System Adequacy Retrospect 2004*, Union for the Co-ordination of Transmission of Electricity, June 2005.
- UCTE (2005b): *UCTE System Adequacy Forecast 2005-2015*, Union for the Co-ordination of Transmission of Electricity, January 2005.
- Van der Linde, J.G. and R. Lefeber (1988): *International Energy Agency Captures the Development of European Community Energy Law*, Journal of World Trade, vol. 22, no. 5, 1988.
- Van Oostvoorn, F. (editor) (2003): *Long-term gas supply security in an enlarged Europe: Final Report ENGAGED Project*, ECN-C-03-122, ECN, the Netherlands.
- VROM (2005): *Fourth Netherlands’ National Communication under the United Nations Framework Convention on Climate Change*. Ministry of Housing, Spatial Planning and the Environment (VROM), The Hague, the Netherlands, December 2005.
- Van Werven, M.J.N, M. de Nooij, M.J.J. Scheepers (2005): *Adequacy of supply standards for the electricity market: from obligations to informal market signals*. Paper presented at the Elforsk Market Design Conference 2005 ‘Security of Supply on Competitive Electricity Markets. Available at: http://www.elforsk-marketdesign.net/archives/2005/conference/papers/8._van_Werven.pdf
- Wals, A., M. Scheepers (2003): *Trends in foreign power generation reserves and consequences for the supply security of the Dutch power market*, ECN-C--03-117, Note to the Ministry of Economic Affaires, October 10, 2003, ECN, the Netherlands.

Abbreviations

CC	Crisis Capability
CCS	Carbon Capture and Storage
CIEP	Clingendael International Energy Programme
CHP	Combined Heat and Power
DG TREN	Directorate-General Transport and Energy
EC	European Commission
ECN	Energy research Centre of the Netherlands
ETS	Emission Trading System
EU	European Union
GDP	Gross Domestic Product
GE	Global Economy, one of the new baseline scenarios for the Netherlands. The scenario has a high economic growth, and assumes no post-Kyoto climate policy.
IEA	International Energy Agency
LNG	Liquefied Natural Gas
MA	Mitigation Assessment
MS	Member State
NATO	North Atlantic Treaty Organisation
OPEC	Organisation of Petroleum Exporting Countries
PES	Primary Energy Sources
PL	PoLand
POWERS	Model for the Dutch electricity market and electricity production
RA	Risk Assessment
S/D	Supply/Demand
SoS	Security of Supply
SP	SPain
TSO	Transmission System Operator
UCTE	Union for the Co-ordination of Transmission of Electricity
UK	United Kingdom
UN	United Nations

Appendix A Scoring rules

This appendix provides more details on the scoring rules of the Supply/Demand Index Model that have been described qualitatively in Chapter 5 (Sections 5.3, 5.4 and 5.5). The scoring rules are shown as formulas (mathematical expressions), with the symbols explained.

With the various weights, sub-indices and scoring rules at the end of the S/D Index tree (see Figure 5.2, also the sub-index values can be computed. The formulas for the ‘top-level’ indices are given below:

S/D index	=	$w_{dem} \times sc_{dem} + w_{sup} \times sc_{sup}$
w_{dem}	=	weight of Demand (default 0.3)
w_{sup}	=	weight of Supply (default 0.7)
		$w_{dem} + w_{sup} = 1$
sc_{dem}	=	sub-index Demand
	=	$w_{ind} \times sc_{ind} + w_{res} \times sc_{res} + w_{ter} \times sc_{ter} + w_{tra} \times sc_{tra}$
sc_{sup}	=	sub-index Supply
	=	$w_{ct} \times sc_{ct} + w_{pes} \times sc_{pes}$
w_{ct}	=	weight of Conversion and transport (default 0.3)
w_{pes}	=	weight of Primary Energy Sources (default 0.7)
		$w_{ct} + w_{pes} = 1$
sc_{ct}	=	Sub-index Conversion and transport (secondary energy carriers)
sc_{pes}	=	Sub-index Primary Energy Sources

The scoring rules at the lower levels are explained in the next sections.

A.1 Final energy demands

The scoring rules for the final energy demands have been qualitatively described in Section 5.3 of Chapter 5. This section will describe the scoring rules in their mere mathematical formulation.

A.1.1 Definitions

Symbol	Description
w_{res}	Weight for residential (households) in Final Energy Demand (equal to relative share in final energy Final Energy Demand mix)
w_{ind}	Weight for industry in Final Energy Demand (equal to relative share in final energy Final Energy Demand mix)
w_{ter}	Weight for tertiary sector in Final Energy Demand (equal to relative share in final energy Final Energy Demand mix)
w_{tra}	Weight for transport sector in Final Energy Demand (equal to relative share in final energy Final Energy Demand mix)
	$w_{res} + w_{ind} + w_{ter} + w_{tra} = 1$
f_{tra_goo}	Fraction of transport goods demand
f_{tra_pas}	Fraction of transport passenger demand
	$f_{tra_goo} + f_{tra_pas} = 1$

Symbol	Description	Unit short
ei_res	Energy intensity of the residential sector	toe/capita
ei_ind	Energy intensity on added value for the industrial sector	toe/M€
ei_ter	Energy intensity on added value for the tertiary sector	toe/M€
ei_tra_goo	Energy intensity for the transport sector, goods	toe/Mtkm
ei_tra_pas	Energy intensity for the transport sector, passenger	toe/Mpkm
ei_res_bm	Benchmark value for energy intensity of the residential sector	toe/capita
ei_ind_bm	Benchmark value for energy intensity on added value for the industrial sector	toe/M€
ei_ter_bm	Benchmark value for energy intensity on added value for the tertiary sector	toe/M€
ei_tra_goo_bm	Benchmark value for energy intensity for the transport sector, goods	toe/Mtkm
ei_tra_pas_bm	Benchmark value for energy intensity for the transport sector, passenger	toe/Mpkm

toe = ton-oil-equivalents

Mtkm = M-ton-km

Mpkm = M-passenger-km

A.1.2 Benchmark values and scoring rules

The benchmark values have been deduced from the Odyssee database (2003 values) or Eurostat databases (2002 or 2003 values). The next table shows the values used. Lacking readily available data for the new Member States, the Odyssee data that cover the EU-15 plus Norway have been used as approximation in most cases. Moreover, in case of clear outliers, a more representative selection of a 'top-5' average as benchmark value has been chosen.

Symbol	Value	Value	Remarks
ei_res_bm	0.35	toe/cap	Average of the top-5 EU-25 value (Eurostat, 2005)
ei_ind_bm	76.0	toe/M€	Average of the top-5 EU-15 value (Odyssee, 2005)
ei_ter_bm	15.2	toe/M€	Average of the top-2 to 5 MS, EU-15 value (Odyssee, 2005). Luxembourg (1 st) omitted as outlier, and not that representative.
ei_tra_goo_bm	46.2	toe/Mtkm	Average of the top-2 to top-5 MS, EU-15 value (Odyssee, 2005). Austria (1 st) omitted as outlier.
ei_tra_pas_bm	30.5	toe/Mpkm	Average of the top-2 to top-5 MS, EU-15 value (Odyssee, 2005). Finland (1 st) omitted as outlier.

It should be noted that the selection of the benchmark values inherently has some subjectivism. In the numerical examples presented in Chapter 5 and in Appendix C, all estimates but in particular the weighing factors and scoring criteria should be considered as illustrative and indicative only. Therefore, these types of parameter values have been subject to multi-variate sensitivity analyses in the first (preliminary) calculations (see also Section 5.3).

The scoring rule for each of the final energy demand sectors is:

$$\text{Score} = \text{Minimum} (ei_Sector_bm / ei_Sector, 1) \times 100$$

$$\text{With } Sector = \text{either res, ind, ter, tra_goo, or tra_pas}$$

So, the index value for each energy demand sector is calculated from the ratio between the EU's or Member States' energy intensity and the benchmark figures. So, the maximum index value will be 100 if the energy intensity is less (i.e. better) than the benchmark value.

Weighing the four sectoral indices with the shares of each demand sector relative to total final energy demand results in the sub-index value for energy demand.

The transport sub-index value is calculated from the fractions of the goods and passenger demand and the two separate scores.

A.2 Primary energy sources

A.2.1 Definitions

w_{pri} = Weight for the primary energy source pri

ds_{pri} = (Net) domestic share for for the primary energy source pri

pri = either oil, gas, coa, nuc, ren, or oth (first three letter are used as symbolic representation)

Symbol	Value	Description
<i>Weights</i>		
w_oil	MS-spec	Weight of oil (products) in primary energy sources (equal to relative share in PES mix)
w_gas	MS-spec	Weight of gas in primary energy sources (equal to relative share in PES mix)
w_coa	MS-spec	Weight of coal (solids) in primary energy sources (equal to relative share in PES mix)
w_nuc	MS-spec	Weight of nuclear fuel in primary energy sources (equal to relative share in PES mix)
w_ren	MS-spec	Weight of renewable energy sources (biomass and other sources) in primary energy sources (equal to relative share in PES mix)
w_oth	MS-spec	Weight of other sources in primary energy sources (equal to relative share in PES mix)
<p>The weights above are equal to the relative fractions in the PES mix (gross inland consumption, (Eurostat, 2006; year 2003 data)), and hence sum up to 1: $w_{oil} + w_{gas} + w_{coa} + w_{nuc} + w_{ren} + w_{oth} = 1.$</p>		
<i>Domestic, all</i>		
ds_oil	MS-spec	(Net) domestic share for the primary energy source oil
ds_gas	MS-spec	(Net) domestic share for the primary energy source gas
ds_oil_min	30	Minimum (Net) domestic share for the primary energy source oil in order to get positive score on domestic part
ds_gas_min	30	Minimum (Net) domestic share for the primary energy source gas in order to get positive score on domestic part
ds_coa	MS-spec	(Net) domestic share for the primary energy source coal
ds_nuc	MS-spec	(Net) domestic share for the primary energy source nuclear
ds_ren	MS-spec	(Net) domestic share for the primary energy source renewables
ds_oth	MS-spec	(Net) domestic share for the primary energy source 'others'
sc_min_coa	70	Minimum score for domestic/import criterion coal
sc_min_nuc	100	Minimum score for domestic/import criterion nuclear
sc_min_ren	70	Minimum score for domestic/import criterion renewables
sc_min_oth	70	Minimum score for domestic/import criterion 'others'
<i>Import, oil and gas</i>		
EU+NO_s_oil	MS-spec	(Crude) oil import share coming from within EU+NO
EU+NO_s_gas	MS-spec	Natural gas import share coming from within EU+NO
sc_EU_min_oil	30	Minimum import oil from within EU+NO to get positive score on EU+NO/non-EU criterion [%]
sc_EU_min_gas	30	Minimum import gas from within EU+NO to get positive score on EU+NO/non-EU criterion [%]
sh_lt_oil	MS-spec	Share for long term 'secure' oil contracts in non-EU import part (0-1)
sh_lt_gas	MS-spec	Share for long term 'secure' gas contracts in non-EU import part (0-1)
w_lt_oil	0.5	Weight for long term 'secure' oil contracts in non-EU import part (0-1)
w_lt_gas	0.8	Weight for long term 'secure' gas contracts in non-EU import part (0-1)

A.2.2 Oil and gas

The scoring rules for all PES use the net import shares and net domestic share (ds), to score the domestic part. In addition for oil and gas, the shares originating from EU+Norway, from non-EU, and a (weighted) part from the non-EU share governed by long-term contracts are used in a combined rule to score the import part.

Domestic

Domestic production will only result in a positive score if the domestic share is above a certain minimum, ds_min. The score is proportional to the domestic share in the interval (ds_min, 100).

In a formula, the domestic score equals:

$$\begin{aligned} & \text{Max} (0 ; - ds_min_oil \times 100 / (100-ds_min_oil) + 100 / (100-ds_min_oil) \times ds_oil) \\ & \text{Max} (0 ; - ds_min_gas \times 100 / (100-ds_min_gas) + 100 / (100-ds_min_gas) \times ds_gas) \end{aligned}$$

This scoring rule is depicted graphically in Figure 5.4 in Chapter 5.

Import

The import part will only get a positive score if the import share from EU+Norway (EU+NO_s) and a weighted (weight: w_lt_) share from non-EU governed by long term contracts (sh_lt_) is above a certain minimum threshold (sc_EU_min_).

In a formula, the import score equals for oil (gas similar):

$$\text{Max} (0 ; - sc_EU_min_oil \times 100 / (100-sc_EU_min_oil) + 100 / (100-sc_EU_min_oil) \times (EU+NO_s_oil + w_lt_oil \times sh_lt_oil))$$

In essence, this formula is similar to the domestic part with the 'ds_min_' part replaced by 'sc_EU_min_' and 'ds_' replaced by 'EU+NO_s_ + w_lt_ × sh_lt_'.

Moreover, the score for import is normalised with the domestic score, by multiplying it:
(import score) × (100 - domestic score) / 100.

This ensures that the total PES sub-index value (score) will not be higher than 100, using the net domestic share and import dependency as weighing factors.

The import scoring rules are depicted graphically in the next Figure A.1 In the default situation the credit for long-term contracts is zero. In addition, two cases are shown for which the imports from outside the EU and Norway are secured by 50% or 100% long-term contracts.

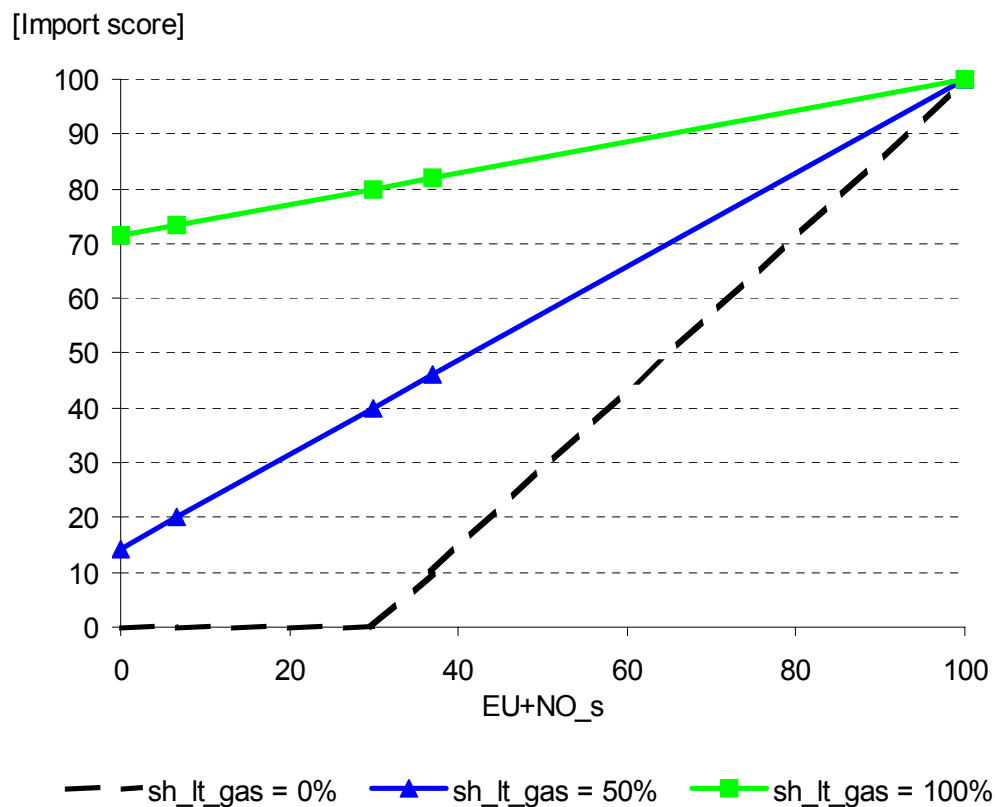
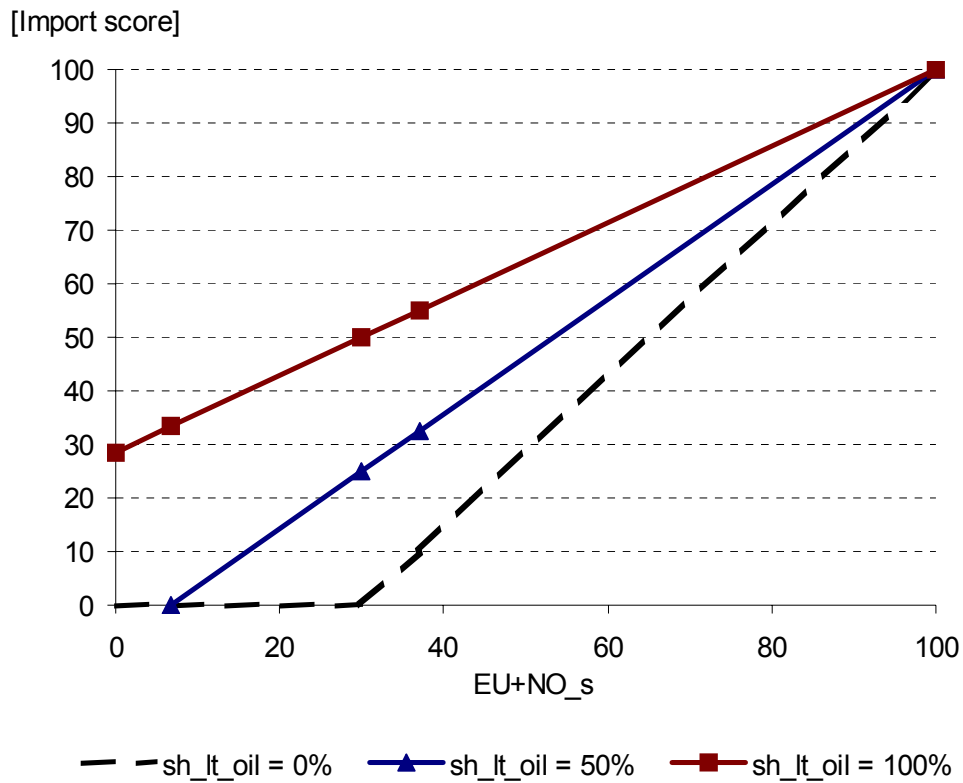


Figure A.4 Scoring rules for imports of oil (top) and gas (bottom)

A.2.3 Coal, Nuclear, Renewable sources, Other

Nuclear energy will have a value of 100 irrespective of the supply origin because supply risks for uranium are relatively low.

Because coal, renewables (mainly biomass) and other energy supplies will be sufficiently diversified, the index has a minimum value of 70 (*sc_min*) if the total supply is imported. The score will increase proportionally with decreasing shares of imports (and increasing domestic shares).

In a formula, the domestic score equals:

$$sc_min_pri + (100 - sc_min_pri) \times ds_pri / 100,$$

with *pri* = either *coa*, *nuc*, *ren* or *oth* (coal, nuclear, renewables or 'other').

These scoring rule is depicted graphically in Figure 5.4.

Some may argue that coal is at least as good for the security of supply as nuclear; in that case the minimum score for coal would be 100. In the case for the Netherlands, a specific sensitivity analysis has been performed and reported in Appendix C.

A.3 Energy conversion and transport

A distinction is made between electricity, heat and transport fuels. For each a further subdivision is made between conversion and transport, and depending on secondary energy carrier, a further delineation, see also Figure 5.2 in Chapter 4.

A.3.1 Definitions

Symbol	Value	Description
<i>Weights</i>		
<i>w_ele</i>	0.3	Weight electricity (as secondary energy carrier)
<i>w_gas</i>	0.3	Weight gas (as secondary energy carrier)
<i>w_he</i>	0.2	Weight heat (as secondary energy carrier)
<i>w_trf</i>	0.2	Weight transport fuel (as secondary energy carrier)
<i>Electricity</i>		
<i>eff_e</i>	MS-spec	Average conversion efficiency thermal electricity production
<i>eff_e_min</i>	0.35	Minimum value average conversion efficiency thermal electricity production
<i>eff_e_max</i>	0.50	Maximum value average conversion efficiency thermal electricity production
<i>res_fac</i>	MS-spec	Reserve (margin) factor domestic production for the electricity system, without import capacity and assumptions on (unplanned) availability
<i>res_fac_cri</i>	1.20	Criterion value reserve margin factor domestic production for the electricity system
<i>imp_cap</i>	MS-spec	Import capacity interconnection, expressed as percentage of domestic production capacity
<i>imp_cap_cri</i>	0.05	Criterion value for import capacity interconnection, expressed as fraction of domestic production capacity
<i>Gas</i>		
<i>gas_gic</i>	MS-spec	Annual gas consumption (Gross Inland Consumption), bcm/year

Symbol	Value	Description
gas_imp_cap	MS-spec	Import capacity, bcm/year (e.g. based on a standard load factor of 8300 hours like in (EC, 2005). Import capacity includes both pipeline gas and LNG imports.
gas_dom_pro	MS-spec	Domestic gas production (capacity), bcm/year, either actual in a given year or maximum capacity
gas_res	MS-spec	'Gas reserve factor' defined as: $(\text{gas_dom_pro} + \text{gas_imp_cap}) / \text{gas_gic}$
ugs_pea_out	MS-spec	Peak output of underground gas storage (mcm/day)
lng_pea_out	MS-spec	Nominal (total) output of (all) LNG facilities (mcm/day)
dom_pea_pro	MS-spec	Domestic one-day peak production (mcm/day).
gas_pea_ave	MS-spec	Average daily gas demand in the peak month (mcm/day)
<i>Heat</i>		
ele_CHP	MS-spec	Fraction of electricity produced by combined heat and power (CHP)
ele_CHP_cri	25%	Criterion value fraction of electricity produced by CHP
<i>Transport fuels</i>		
ref_cap_uti	MS-spec	Refinery capacity utilisation rate (IEA, 2005, p. 89)
low_uti	80%	Low value for criterion for refinery capacity utilisation rate
high_uti	95%	High value for criterion for refinery capacity utilisation rate

A.3.2 Electricity

Conversion

If the *efficiency* of thermal electricity production is higher, a higher score results. An efficiency of 35% or less, leads to a score of 0; an efficiency of 50% or more leads to a 100 score. In between, a proportional score applies. E.g. an efficiency of 42% leads to a score of 47 ($=100 \times (42-35)/(50-35)$).

The *adequacy* score is related to the domestic capacity compared to peak demand. A 'reserve factor', *res_fac*, is defined as the percentage of the available capacity in excess of the peak demand. If the reserve factor is more than a certain level, *res_fac_cri* (20%) the score is 100. Otherwise, the score is $\text{res_fac}/\text{res_fac_cri}$.

The default score value for *reliability* is 100, assuming that on average the reliability of power plants is sufficient. Alternatively, the reliability of power generation capacity could also be included in power generation adequacy.

These scoring rules are summarised in the table below.

Attribute	Weight	Values	Scoring rule
Efficiency	0.3	eff_e e.g. from energy balance eff_e_max = 50% eff_e_min = 35%	100, if eff_e > eff_e_max 0, if eff_e < eff_e_min $100 \times (\text{eff}_e - \text{eff}_{\text{min}}) / (\text{eff}_{\text{e_max}} - \text{eff}_{\text{e_min}})$, in between
		Score, eff_e = 42%	Score: 47 (= (47-35) / (50-35))
Adequacy	0.6	res_fac_cri = 20%	100, if res_fac > res_fac_cri Min (100; $100 \times \text{res_fac} / \text{res_fac_cri}$)
		Score, res_fac = 10%	Score: 50 (= 10/20)
Reliability	0.1		100 (Reliability of plants considered sufficient)

Transport

The *adequacy* attributes are associated with *inland congestion* (weight 0.2) and the import capacity (weight 0.8). The default score for inland congestion is 100. Member States with inland congestion problems may have a lower score.

The score on the *import capacity* is a combination of a score related to the share of import, expressed as % of the domestic capacity (imp_cap_fac), and a criterion value (imp_cap_cri), and sum of the domestic and import capacity compared to peak demand (see also Electricity, Conversion, Adequacy).

The import capacity criterion value (imp_fac_cri) is tentatively set to 5%, so lower and less stringent than the ‘Barcelona’ goal of 10% set out in (EC, 2003b).

A product type of rule is needed for Member States with very high import capacities (e.g. Luxembourg) in comparison with domestic capacity. The sum of domestic and import capacity in relation to peak demand is then relevant as well. Otherwise, the value of import capacity could be overrated. In the product scoring rule, the same criterion value as for domestic capacity only has been used (res_fac_cri).

Note that different sources may use different definitions of ‘domestic capacity’, ‘reserve factor’, ‘reserve margin’, or ‘import capacity’ as a result of which the shares or criteria may (slightly) differ (UCTE, 2005; TenneT, 2005). For MS comparison purposes, a clear and uniquely determined and consistent definition should be used.

For the transport *reliability* attribute, statistics on network reliability in terms of the average time of outages per year could be used or a value for the total minutes per year without supply. Such values could be compared to a criterion value below which the score would be 100 (reliable enough). If the values are higher than such criterion values, the score would be less than 100. However, data on future network reliability is not available. For the moment the default index value is 100.

These scoring rules are summarised in the table below.

Attribute	Weight		Weight	Scoring rule
Adequacy	0.8	Inland congestion	con-0.2	100
		Import capacity	0.8	$\text{Min}(100; 100 \times \text{imp_cap_fac} / \text{imp_fac_cri})$ \times $\text{Min}(100; 100 \times (\text{res_fac} + \text{imp_cap_fac} / \text{res_fac_cri}) / 100)$
Reliability	0.2		n/a	100 (Reliability of network considered sufficient)

A.3.3 Gas

It should be noted that there are hardly any relatively simple measures for the security of gas supply. In (DTI, 2006) two measures are mentioned:

1. 'Gas margin': difference between maximum gas supply capacity and maximum gas demand, e.g. on a particularly cold day or throughout a cold period during winter. This does not include the extent to which these capacities do coincide i.e. at peak demands the maximum capacity may not be fully available.
2. Expected energy unserved (as % of annual gas demand): needs assumptions on probability distributions of supply and demand (similarly as for similar measures used for electricity i.e. Loss Of Load Expectation, LOLE).

Some countries use a criterion to meet a 1 in N years extreme cold day peak demand to 'design' or check an adequate level of the capacity of supply sources. E.g. Belgium, the Netherlands and the UK use a 1-in-50 years criterion (IEA, 2002).

The extreme cold day or period may also be defined by a certain extremely low temperature above which supply should be guaranteed, possibly restricted to specific categories of non-interruptible consumers.

In updating the S/D Index model, the gas transport branch is developed quite analogous to the electricity branch. Rather than a conversion branch, the gas branch has a Storage/Flexible production branch.

Transport

The gas transport branch is quite analogous to the electricity transport branch. The *adequacy* attributes are associated with *inland congestion* (weight 0.2) and the import capacity (weight 0.8). The default score for inland congestion is 100. Member States with inland congestion problems may have a lower score.

The score on the *import capacity* takes into account the annual gas consumption in relation to the sum of the import capacity and the domestic production. A 'gas reserve factor' is defined and related to a criterion

The default score value for *reliability* is 100, assuming that on average the reliability of the gas transport network is sufficient. Alternatively, the reliability could also be included as an attribute in the Adequacy part.

These scoring rules are summarised in the table below.

Attribute	Weight		Weight	Scoring rule
Adequacy	0.8	Inland	con-0.2	100
		gestion		
		Import	0.8	If gas_res > swi_mon, then 100
		capacity		If gas_res < 1, then 0
				Otherwise, then: 100*(gas_res - 1)/(swi_mon - 1))
Reliability	0.2		n/a	100 (Reliability of gas transport network considered sufficient)

Storage/Flexibility production

Flexibility requirements can be met by several means:

1. Underground Gas Storage (UGS)
2. LNG (peak-shaving) facilities
3. Flexible production of domestic gas fields
4. Interconnection and import capacity
5. Line-pack
6. Interruptible contracts
7. (fuel-switching capabilities of users e.g. power plants?)

The scoring rule and criterion aims to address mainly the flexibility provided by storage only (UGS and LNG) and domestic production, and the flexibility needed on a daily basis i.e. the adequacy to supply the peak day demand in a specific year. The flexibility that may be covered by import capacity has already been assessed as part of the transport/adequacy branch, and addresses seasonal flexibility and variations.

Flexibility through domestic production is rather limited as most MS are gas importing countries. With the Netherlands, United Kingdom and Denmark as exceptions of Member States with a large domestic production share, the storage/flexibility scoring rule includes mainly UGS and LNG.

Monthly gas consumption patterns are available through Eurostat (website). Monthly figures for the period 2000-mid 2006 have been compiled to arrive at the peak month gas consumption (gas_pea_ave, usually January) that can be compared to the average monthly gas consumption (gas). The ratio of these two values is a measure for the swing in demand (swi_mon, see previous section).

The scoring rules are summarised in the table below.

Attribute	Weight	Scoring rule
Adequacy	0.8	$\min(100; 100*(ugs_pea_out + lng_nom_out + dom_pea_pro) / (gas_pea_ave*1.2))$
Reliability	0.2	100 (Reliability of gas transport network considered sufficient)

As the ‘one-day’ peak demand (*dom_pea_pro*) is not available from the usual statistics, an additional tentative and generic factor of 1.2 has been used to include the ‘actual’ one-day peak demand to some extent, rather than the average daily value of the peak month. In some cases, certain sources of MS specific information mention the one-day peak demand¹⁵.

It should be noted that, in particular demand patterns, may vary from year to year depending on weather conditions and structural increases e.g. due to economic growth. Therefore, it may be sensible to use estimates of peak (and average) demand based on a number of years rather than based on one specific year.

The domestic peak production (*mcm/day*) may not be easily available from statistics. As a (rather conservative) estimate (proxy) the average production per day based on the annual production could be used in cases where statistics are lacking.

Another, less conservative estimate could be made by multiplying this average daily demand with a swing factor for domestic production (e.g. as provided in (IEA, 2002) for some Member States).

A.3.4 Heat

Conversion

The type of scoring rules and attributes for heat are different from the ones for electricity.

The boiler efficiencies are not used here because of lacking information on this aspect (weight set to 0, see Figure 5.2 in Section 5.2). But even more relevant for efficiency of heat production is the share of heat generated by combined heat and power (CHP). Because of the complex (or even impossible) way to compute heat generated and the final heat from existing statistical information, these figures are not used. Instead, the share of CHP in electricity generation (*ele_CHP*) is used. Both statistics and scenario results usually report this CHP indicator for electricity. The index value is proportional to this share and will reach the value of 100 when 25% (*ele_CHP_cri*) of national annual electricity production is generated by CHP, a figure reflecting national practice in the Netherlands and Denmark.

In a formula, the scoring rule equals: $\text{Min}(100; \text{ele_CHP}/\text{ele_chp_cri} \times 100)$.

Transport

The weight of the transport branch in the S/D Index model has been set to 0. Hence, no scoring rule has been developed.

A.3.5 Transport fuels

Conversion

Efficiency: The fuel efficiency in terms of crude oil (and biofuels) input versus oil products output is relatively high (typically about 94%) and not really discriminating. Moreover, supporting data cannot be obtained easily; therefore, a score of 100 is assigned in all cases. Otherwise, a similar rule such as for Electricity, Efficiency could be applied (see Section A.3.2).

Adequacy: The index value is 100 if the refinery capacity in use is 80% or lower compared to the total domestic refinery capacity. If this figure exceeds the value of 95% the index value is

¹⁵ E.g. UK year 2002, 435 mcm was the maximum (IEA, 2002). (DTI, 2005) mentions a value of 500 mcm as expectation for the (near?) future in a severe winter. The ‘average of the peak month’ approach results in about 400 mcm (based on Eurostat data 2000-2005).

dropping to zero. Between these two figures, which again reflect industry practice including mothballing, the index value is proportional to the ratio of refinery capacity in use.

Attribute	Weight	Values	Scoring rule
Efficiency	0.3		100
Adequacy	0.7	ref_cap_uti MS-spec low_uti = 80% high_uti = 92%	100, if ref_cap_uti <= low_uti 0, if ref_cap_uti >high_uti $100 - (\text{ref_cap_uti} - \text{low_uti}) / (\text{high_uti} - \text{low_uti}) \times 100$, otherwise
Reliability	0.0		n/a (weight 0)

Transport

The capacity for transporting automotive fuels will seldom be constrained, because there are several alternatives (by truck, ship, train or pipeline). Therefore the default index value is 100.

Appendix B Quantification details

This part of the appendix reviews in more detail issues with regard to quantification of the S/D model, viz. data sources, specific data requirements, additional assumptions, limitations and other issues.

B.1 Data sources

Both the conceptual model as outlined in Chapter 5 and the illustrative quantified examples of the model in Chapter 5 indicate that the model needs a variety of data in order to quantify it. To the extent possible, objective data sources have been used:

1. *Energy demand intensities* from (Odyssee, 2005) and (Eurostat, 2004; 2006).
2. Data on *energy conversion and transport aspects* from a variety of sources including (UCTE, 2005), the Dutch TSO (TenneT, 2005), EC scenarios (EC, 2006), EC Benchmarking reports (EC, 2005b) and (IEA, 2002, 2005, 2006).
3. Data on *primary energy sources*: from Eurostat data and the EC scenarios.

Since energy balances play a crucial role in providing the more objective information, one example from Eurostat and one from the (old) baseline EC scenarios is presented here, see Table B.1 for the EU-25 energy balance 1990-2003 and Table B.2 for the energy balance 1990-2030 of the 'old' baseline scenario for Netherlands.

From the inland consumption data, the *relative shares of the primary energy supply* mix can be computed. From the final energy demand, the *relative shares of the sectoral final energy demand* can be computed. These two types of shares provide the 'objective' weighing factors in the S/D model.

In addition, Table B.3 presents the summary indicators some of which have been used in the quantification of the S/D model.

For reasons of convenience, the most recent energy balances (April 2006) that were readily and easily available through the Eurostat website have been used. These data are made publicly available in Excel formats which facilitate the various quantification steps. Therefore, the 2003 data of (Eurostat, 2006) have been used primarily. Moreover, information on the final energy intensities is largely based on the Odyssee database.

It should be noted that some parts of the Eurostat 'Monthly tables' include more recent data on the primary supply and imports. Data for 2004 (complete) and partially for 2005 are included in these tables. Such information is only made publicly available in PDF format.

Table B.2 *Example of summary energy balance, EU-25, 1990-2003*

[Mtoe]	1990	1995	2000	2001	2002	2003
Production	877.84	896.80	896.60	897.55	895.86	888.17
<i>Solid fuels</i>	351.75	264.46	203.20	201.53	200.59	196.64
<i>Oil</i>	120.33	162.35	163.77	152.66	155.87	145.12
<i>Gas</i>	139.63	174.17	196.66	197.22	193.27	189.39
<i>Nuclear</i>	196.95	215.32	237.66	246.03	248.40	251.16
<i>Renewables</i>	67.52	78.18	92.62	97.07	94.51	103.11
<i>Other</i>	1.67	2.34	2.68	3.04	3.22	2.74

[Mtoe]	1990	1995	2000	2001	2002	2003
Net Imports	708.96	701.17	801.54	827.27	826.24	875.47
<i>Solid fuels</i>	75.25	73.92	94.31	103.48	101.33	<i>111.30</i>
<i>Oil</i>	507.99	490.73	518.22	540.31	525.22	<i>547.29</i>
<i>Gas</i>	123.39	134.80	186.46	182.01	197.39	<i>216.16</i>
<i>Electricity</i>	2.18	1.37	2.14	1.04	1.86	<i>0.41</i>
<i>Renewables</i>	0.14	0.34	0.40	0.43	0.43	<i>0.30</i>
Derived heat			0.00	0.00	0.00	0.00
<i>Inland Consumption</i>	1553.01	1571.44	1652.15	1686.83	1676.89	1726.03
<i>Solid fuels</i>	431.53	345.42	305.60	307.14	305.53	<i>314.38</i>
<i>Oil</i>	593.65	621.11	634.76	648.04	638.00	<i>645.85</i>
<i>Gas</i>	259.14	307.34	376.29	383.97	384.92	<i>408.08</i>
<i>Nuclear</i>	196.95	215.32	237.66	246.03	248.40	<i>251.16</i>
<i>Renewables</i>	67.89	78.53	93.01	97.56	94.94	<i>103.40</i>
<i>Other</i>	3.85	3.71	4.83	4.09	5.10	<i>3.16</i>
Elec. Generation [TWh]	2379.96	2630.76	2928.49	3004.58	3018.03	3120.53
Coal	887.51	909.12	887.27	897.57	895.43	960.38
Oil	214.04	217.16	176.40	170.18	185.69	162.39
Gas	180.91	275.75	503.21	508.53	542.63	581.60
Nuclear	780.21	864.56	921.36	953.76	964.12	973.67
Renewables*	293.79	335.58	404.17	430.28	386.67	398.60
Other	23.50	28.60	36.09	44.26	43.49	43.89
<i>Final Energy Demand</i>	1010.46	1023.74	1068.86	1093.97	1080.07	<i>1131.56</i>
by fuel/product						
Solid fuels	123.93	81.52	58.20	56.94	52.45	51.16
Oil	428.58	447.22	469.39	480.81	475.16	476.43
Gas	202.89	231.62	257.05	262.35	258.11	275.17
Electricity	176.46	187.82	211.35	216.32	218.33	224.55
Renewables	33.78	38.01	43.58	45.44	45.24	48.16
Other	44.82	37.56	29.28	32.10	30.77	56.10
by sector						
<i>Industry</i>	331.64	304.89	309.89	309.86	307.01	<i>317.18</i>
<i>Transport</i>	273.14	295.01	333.38	335.74	338.09	<i>344.38</i>
<i>Households</i>	259.33	274.58	274.11	290.24	274.09	<i>300.53</i>
<i>Commerce & other</i>	146.35	149.26	151.47	158.13	160.87	<i>169.48</i>
Non-Energy Uses	94.31	103.55	105.94	102.45	100.31	100.82
CO ₂ emissions** [Mt]	3775	3655	3692	3749	3750	3853
Energy intensity [toe/M€95]	246	230	212	212	209	208
CO ₂ intensity [tCO ₂ /toe]	2.43	2.33	2.23	2.22	2.24	2.23
Import dependency [%]	44.6	43.6	47.3	47.8	48.0	49.5
Energy per capita [kgoe/cap]	3524	3507	3648	3714	3682	3773
CO ₂ per capita [kg/cap]	8566	8157	8152	8255	8233	8428

* not including pumping

** without maritime bunkers

Source: (Eurostat, 2006)

Data indicated in italics have been used for the '2003' quantification.

Table B.3 Summary energy balance EC baseline scenario, the Netherlands, 1990-2030

[Mtoe]	1990	1995	2000	2005	2010	2015	2020	2025	2030
Primary Production	60.29	65.95	56.91	62.18	65.55	60.30	55.12	50.11	48.18
Solids	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
Oil	4.03	3.56	2.37	2.86	2.90	2.33	1.75	1.32	0.99
Natural gas	54.61	60.46	51.90	56.02	60.00	55.00	50.00	45.00	43.00
Nuclear	0.88	1.04	1.01	0.94	0.00	0.00	0.00	0.00	0.00
Renewable energy sources	0.77	0.90	1.62	2.35	2.65	2.97	3.37	3.80	4.19
Hydro	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01
Biomass	0.54	0.60	1.01	1.35	1.59	1.76	2.06	2.31	2.44
Waste	0.22	0.26	0.52	0.68	0.68	0.77	0.81	0.81	0.81
Wind	0.00	0.03	0.07	0.29	0.34	0.39	0.45	0.61	0.85
Solar and others	0.00	0.00	0.01	0.02	0.03	0.04	0.05	0.05	0.09
Geothermal	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
Net Imports	17.39	16.34	34.24	29.65	30.82	39.29	48.20	57.03	64.07
Solids	9.52	8.90	8.17	5.38	5.64	5.22	4.96	7.82	12.54
Oil	30.88	32.83	41.63	41.15	42.47	44.85	47.28	49.40	51.48
- Crude oil and Feedstocks	47.96	59.28	60.93	73.78	78.40	83.39	88.95	93.51	98.38
- Oil products	-17.08	-26.45	-19.30	-32.63	-35.93	-38.54	-41.67	-44.11	-46.90
Natural gas	-23.80	-26.37	-17.19	-18.56	-19.01	-12.52	-5.80	-1.96	-1.73
Electricity	0.79	0.98	1.63	1.68	1.71	1.74	1.76	1.77	1.77
Gross Inland Consumption	66.82	73.32	75.36	76.72	80.03	82.21	85.01	87.76	91.75
Solids	9.15	9.08	7.98	5.38	5.64	5.22	4.96	7.82	12.54
Oil	24.42	27.24	28.41	28.91	29.03	29.80	30.72	31.33	31.98
Natural gas	30.81	34.09	34.71	37.46	40.99	42.48	44.20	43.04	41.27
Nuclear	0.88	1.04	1.01	0.94	0.00	0.00	0.00	0.00	0.00
Electricity	0.79	0.98	1.63	1.68	1.71	1.74	1.76	1.77	1.77
Renewable energy forms	0.77	0.90	1.62	2.35	2.65	2.97	3.37	3.80	4.19

[Mtoe]	1990	1995	2000	2005	2010	2015	2020	2025	2030
<i>as % in Gross Inland Consumption</i>									
<i>Solids</i>	13.7	12.4	10.6	7.0	7.1	6.3	5.8	8.9	13.7
<i>Oil</i>	36.5	37.2	37.7	37.7	36.3	36.2	36.1	35.7	34.8
<i>Natural gas</i>	46.1	46.5	46.1	48.8	51.2	51.7	52.0	49.0	45.0
<i>Nuclear</i>	1.3	1.4	1.3	1.2	0.0	0.0	0.0	0.0	0.0
<i>Renewable energy forms</i>	1.2	1.2	2.2	3.1	3.3	3.6	4.0	4.3	4.6
Electricity Generation [TWh _e]									
Nuclear	71.82	81.05	89.60	96.62	114.25	128.46	141.41	153.50	164.33
Hydro & wind	3.50	4.02	3.93	3.66	0.00	0.00	0.00	0.00	0.00
Thermal (incl. biomass)	0.14	0.41	0.97	3.55	4.13	4.76	5.38	7.27	10.38
	68.18	76.63	84.70	89.41	110.11	123.70	136.03	146.23	153.95
Fuel Inputs for Thermal Power Generation									
Solids	16.70	18.87	19.41	19.18	21.64	22.43	23.59	25.10	27.53
Oil (including refinery gas)	5.77	5.92	5.15	2.26	1.94	1.45	1.10	3.90	8.59
Gas	1.22	1.36	0.92	0.46	0.66	0.58	0.59	0.61	0.60
Biomass - Waste	9.20	10.96	12.08	14.85	17.67	18.88	20.29	18.92	16.69
Geothermal heat	0.52	0.63	1.26	1.62	1.38	1.53	1.62	1.67	1.65
Hydrogen - Methanol	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
Fuel Input in other transformation proc.									
Refineries	72.28	83.70	85.03	98.93	103.29	107.39	111.98	116.06	120.13
District heating	68.77	80.01	82.16	95.74	99.08	103.11	107.36	111.20	115.15
Biofuels and hydrogen production	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
Others	0.00	0.00	0.00	0.18	0.66	0.79	1.07	1.30	1.45
	3.51	3.69	2.87	3.01	3.55	3.50	3.56	3.56	3.53
Energy Branch Consumption	5.41	6.25	5.48	5.45	5.54	5.65	5.78	5.91	6.06
Non-Energy Uses	9.33	9.33	9.45	9.33	9.32	9.29	9.21	9.14	9.08

[Mtoe]	1990	1995	2000	2005	2010	2015	2020	2025	2030
<i>Final Energy Demand</i>	42.64	47.16	49.59	52.86	55.93	58.48	<i>61.12</i>	63.21	65.32
<i>by sector</i>									
<i>Industry</i>	12.89	12.43	13.60	13.66	13.97	14.37	<i>14.63</i>	14.86	15.11
- energy intensive industries	9.90	8.78	9.48	9.39	9.37	9.43	9.42	9.39	9.33
- other industrial sectors	2.99	3.65	4.12	4.27	4.61	4.94	5.21	5.47	5.77
<i>Residential</i>	9.77	11.12	10.28	10.94	11.67	12.24	<i>12.68</i>	13.01	13.42
<i>Tertiary</i>	9.66	11.20	11.89	12.62	13.41	13.98	<i>14.57</i>	15.14	15.65
<i>Transport</i>	10.32	12.40	13.82	15.64	16.88	17.88	<i>19.24</i>	20.19	21.13
<i>by fuel</i>									
Solids	1.64	1.39	1.25	1.19	1.18	1.19	1.14	1.10	1.06
Oil	12.60	14.20	16.20	18.34	19.46	20.55	21.93	22.81	23.76
Gas	19.70	21.02	19.99	20.17	20.67	20.91	21.08	21.27	21.62
Electricity	6.32	7.14	8.42	8.93	10.33	11.44	12.45	13.37	14.19
Heat (from CHP and District Heating)	2.14	3.17	3.45	3.97	4.03	4.12	4.24	4.36	4.39
Other	0.24	0.24	0.28	0.26	0.26	0.28	0.28	0.30	0.30
CO ₂ Emissions (Mt of CO ₂)	152.9	167.2	165.6	164.6	174.0	178.4	184.4	194.9	211.5
Electricity and Steam production	48.7	54.0	52.3	45.5	51.5	52.2	54.1	62.1	75.3
Energy Branch	13.6	15.8	13.1	12.9	12.9	13.0	13.2	13.4	13.6
Industry	22.4	19.9	21.3	20.5	20.4	20.6	20.5	20.2	20.2
Residential	19.2	20.6	18.9	19.9	20.9	21.6	22.1	22.3	22.5
Tertiary	19.0	20.7	19.5	20.2	20.1	20.0	20.0	20.3	20.6
Transport	30.0	36.2	40.5	45.5	48.2	51.0	54.4	56.7	59.2
CO ₂ Emissions Index (1990=100)	100.0	109.3	108.3	107.7	113.8	116.7	120.6	127.5	138.3

Source: (EC, 2003), based on PRIMES calculations.
Data indicated in italics have been used for the 2020 quantification.

Table B.4 Summary indicators EC baseline scenario, the Netherlands, 1990-2030

	1990	1995	2000	2005	2010	2015	2020	2025	2030
Main Energy System Indicators									
<i>Population [Million]</i>	14.95	15.46	15.92	16.45	16.82	17.13	17.40	17.66	17.86
GDP [in 000 MEuro'00]	301.4	334.8	401.1	446.9	503.1	564.0	630.3	702.5	780.1
Gross Incl. Cons./GDP [toe/MEuro'00]	221.7	219.0	187.9	171.7	159.1	145.8	134.9	124.9	117.6
Gross Incl. Cons./Capita [toe/inhabitant]	4.47	4.74	4.73	4.67	4.76	4.80	4.88	4.97	5.14
Electricity Generated/Capita [kWh/inhabitant]	4805	5243	5627	5875	6793	7501	8125	8694	9203
Carbon intensity [t of CO ₂ /toe of GIC]	2.29	2.28	2.20	2.15	2.17	2.17	2.17	2.22	2.31
CO ₂ Emissions/Capita [t of CO ₂ /inhabitant]	10.23	10.81	10.40	10.01	10.35	10.42	10.59	11.04	11.85
CO ₂ Emissions to GDP [t of CO ₂ /MEuro'00]	507.3	499.3	412.9	368.4	345.9	316.4	292.5	277.5	271.2
Import Dependency [%]	22.4	19.3	38.6	32.3	32.0	39.5	46.6	53.2	57.1
Energy intensity indicators (1990=100)									
<i>Industry (Energy on Value added)</i>	100.0	88.2	85.1	80.0	74.8	69.5	64.3	59.5	55.0
Residential (Energy on Private Income)	100.0	105.4	80.2	75.3	71.2	66.5	61.4	56.5	52.4
<i>Tertiary (Energy on Value added)</i>	100.0	103.7	89.7	83.7	77.9	71.9	66.5	61.7	57.1
Transport (Energy on GDP)	100.0	108.2	100.7	102.3	98.0	92.6	89.2	84.0	79.2
Carbon Intensity indicators									
Electricity and Steam production [t of CO ₂ /MWh]	0.43	0.39	0.35	0.28	0.29	0.26	0.25	0.27	0.32
Final energy demand [t of CO ₂ /toe]	2.12	2.07	2.02	2.01	1.96	1.94	1.91	1.89	1.88
Industry	1.73	1.60	1.57	1.50	1.46	1.44	1.40	1.36	1.34
Residential	1.96	1.85	1.84	1.82	1.79	1.77	1.74	1.71	1.68
Tertiary	1.97	1.85	1.64	1.60	1.50	1.43	1.37	1.34	1.32
Transport	2.91	2.92	2.93	2.91	2.85	2.85	2.83	2.81	2.80
Electricity and steam generation									
Generation Capacity [GW _c]		21.02	22.75	26.55	28.15	32.61	36.53	39.69	43.08
Nuclear		0.54	0.54	0.48	0.00	0.00	0.00	0.00	0.00

	1990	1995	2000	2005	2010	2015	2020	2025	2030
Hydro (pumping excluded)		0.04	0.04	0.04	0.04	0.04	0.04	0.04	0.04
Wind and solar		0.29	0.46	1.05	1.24	1.64	2.14	2.26	3.38
Thermal		20.15	21.72	24.99	26.87	30.94	34.34	37.40	39.67
of which cogeneration units		6.85	8.87	10.05	9.60	9.22	8.65	7.44	8.51
Open cycle (incl. biomass-waste)		15.05	13.26	13.19	11.41	7.84	6.28	6.75	9.95
Supercritical Polyvalent/Clean Coal and Lignite		0.00	0.00	0.00	0.00	0.00	0.00	2.81	4.89
Gas Turbines Combined Cycle		4.49	7.96	11.30	15.14	19.95	23.80	23.10	19.81
Small Gas Turbines		0.61	0.50	0.50	0.33	3.15	4.26	4.74	5.02
Fuel Cells		0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
Geothermal heat		0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
Indicators									
<i>Efficiency for thermal electricity production [%]</i>		36.3	36.9	42.2	45.5	49.1	51.3	51.7	50.0
Load factor for gross electric capacities [%]		44.0	45.0	41.5	46.3	45.0	44.2	44.1	43.5
<i>CHP indicator [% of electricity from CHP]</i>		36.3	44.1	43.5	31.7	23.9	21.3	16.5	20.7
Non fossil fuels in electricity generation [%]		8.1	10.4	12.3	7.1	6.9	6.8	7.3	8.6
- nuclear		5.0	4.4	3.8	0.0	0.0	0.0	0.0	0.0
- renewable energy forms		3.1	6.0	8.5	7.1	6.9	6.8	7.3	8.6
of which waste		1.0	1.9	1.8	1.6	1.4	1.2	1.1	1.0
Transport sector									
<i>Passenger transport activity [Gpkm]</i>		169.7	179.0	193.3	210.9	232.7	258.8	312.8	340.8
public road transport		11.1	11.8	12.6	15.5	16.0	17.9	18.8	19.6
private cars and motorcycles		141.4	145.3	154.3	167.0	183.8	223.6	243.7	264.0
train transport		12.3	15.4	16.2	15.6	16.8	20.2	21.9	23.5
Aviation		4.1	5.8	9.6	12.3	15.4	22.9	27.3	32.5
inland navigation		0.8	0.7	0.6	0.6	0.7	0.9	1.0	1.1
travel per person [km per capita]		11351	11577	12139	12824	13837	16403	17715	19088

	1990	1995	2000	2005	2010	2015	2020	2025	2030
<i>Freight transport activity [Gpkm]</i>									
Trucks	70.5	80.7	90.8	103.2	117.1	130.0	142.8	155.7	168.8
train transport	31.8	42.2	45.7	55.1	64.8	73.9	83.5	93.7	104.6
inland navigation	3.1	3.1	3.8	3.7	4.0	4.2	4.4	4.5	4.6
	35.7	35.5	41.3	44.5	48.4	51.9	54.9	57.5	59.5
	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
freight activity per unit of GDP [tkm/000 Euro'00]	234	241	226	231	233	231	227	222	216
Energy demand in transport [Mtoe]	10.32	12.40	13.82	15.64	16.88	17.88	19.24	20.19	21.13
public road transport	0.10	0.07	0.09	0.11	0.11	0.11	0.11	0.10	0.10
private cars and motorcycles	5.04	5.55	5.29	5.69	5.74	5.70	6.01	6.07	6.00
trucks	2.90	3.33	4.25	5.12	6.01	6.77	7.34	7.86	8.20
train transport	0.11	0.16	0.18	0.16	0.16	0.15	0.14	0.13	0.14
aviation	1.61	2.60	3.35	3.85	4.09	4.33	4.78	5.15	5.81
inland navigation	0.56	0.70	0.67	0.72	0.78	0.83	0.87	0.88	0.89
Efficiency indicator (activity related)									
<i>passenger transport [toe/Mpkm]</i>	40.4	46.8	46.0	46.4	43.3	39.7	38.7	36.6	35.4
<i>freight transport [toe/Mtkm]</i>	49.0	49.8	54.3	56.6	58.0	58.4	57.4	56.1	53.8

Source: (EC, 2003), based on PRIMES calculations.
Data indicated in italics have been used for the 2020 quantification.

Table B.5 *Gross inland consumption, EU-25 and Member States, 2003*

[Mtoe]	All fuels	Solid fuels	Oil	Natural gas	Nuclear	Renewables
<i>EU-25</i>	<i>1 726.0</i>	<i>314.4</i>	<i>645.8</i>	<i>408.1</i>	<i>251.2</i>	<i>103.4</i>
EU-15	1 513.4	222.5	596.0	366.1	231.7	92.1
BE	55.8	6.2	21.2	14.4	12.2	1.1
CZ	43.7	20.7	8.6	7.8	6.7	1.2
DK	20.7	5.7	8.3	4.7	0.0	2.7
DE	344.5	85.0	125.3	79.2	42.6	11.6
EE	5.5	3.4	1.0	0.7	0.0	0.5
EL	30.2	8.9	17.5	2.0	0.0	1.5
<i>ES</i>	<i>134.1</i>	<i>20.2</i>	<i>67.1</i>	<i>21.4</i>	<i>16.0</i>	<i>9.4</i>
FR	270.6	13.8	92.0	39.4	113.8	17.3
IE	15.3	2.5	8.7	3.7	0.0	0.3
IT	181.8	14.9	88.3	63.4	0.0	10.8
CY	2.5	0.0	2.5	0.0	0.0	0.0
LV	4.4	0.1	1.2	1.3	0.0	1.5
LT	9.0	0.2	2.4	2.4	4.0	0.7
LU	4.2	0.1	2.7	1.1	0.0	0.1
HU	26.7	3.7	6.8	11.9	2.8	0.9
MT	0.9	0.0	0.9	0.0	0.0	0.0
<i>NL</i>	<i>80.5</i>	<i>8.7</i>	<i>31.2</i>	<i>36.0</i>	<i>1.0</i>	<i>2.0</i>
AT	32.7	4.0	13.8	7.6	0.0	6.7
<i>PL</i>	<i>94.1</i>	<i>57.7</i>	<i>20.4</i>	<i>11.3</i>	<i>0.0</i>	<i>5.1</i>
PT	25.3	3.3	14.9	2.6	0.0	4.3
SI	6.9	1.5	2.5	0.9	1.3	0.7
SK	18.9	4.6	3.6	5.7	4.6	0.6
FI	37.1	8.2	10.4	4.1	5.9	7.9
SE	50.9	2.7	15.5	0.8	17.4	13.4
<i>UK</i>	<i>229.8</i>	<i>38.4</i>	<i>79.3</i>	<i>85.9</i>	<i>22.9</i>	<i>3.1</i>

Source: (Eurostat, 2006)

Data indicated in italics have been used for the '2003' quantification.

Table B.6 *Import dependencies, EU-25 and Member States, 2003*

[%]	All fuels	Solid fuels	Oil	Gas
<i>EU-25</i>	<i>49.5</i>	<i>35.4</i>	<i>76.6</i>	<i>53.0</i>
EU-15	51.8	55.1	79.2	49.2
BE	78.8	86.2	100.9	98.9
CZ	24.9	-17.4	95.8	98.2
DK	-31.7	98.3	-98.0	-55.7
DE	61.1	29.1	98.0	78.8
EE	27.4	6.8	73.7	100.0
EL	67.4	4.7	96.1	98.8
<i>ES</i>	<i>76.4</i>	<i>63.4</i>	<i>99.6</i>	<i>99.1</i>
FR	50.5	86.0	99.4	95.5
IE	87.1	65.8	96.3	85.2
IT	84.0	97.7	82.9	80.3
CY	99.1	94.7	100.6	-
LV	58.7	93.7	101.5	104.4
LT	45.3	98.9	89.5	100.0
LU	98.7	100.0	100.2	100.0
HU	61.1	26.8	71.0	83.6
MT	100.0	-	100.0	-
<i>NL</i>	<i>37.6</i>	<i>104.6</i>	<i>91.7</i>	<i>-45.0</i>
AT	69.8	83.8	93.5	78.7
<i>PL</i>	<i>14.3</i>	<i>-23.0</i>	<i>96.5</i>	<i>66.6</i>
PT	85.3	99.7	103.1	100.3
SI	53.4	20.4	101.4	99.4
SK	64.6	79.9	90.6	96.8
FI	59.2	80.6	102.1	100.0
SE	42.9	92.7	106.3	100.0
<i>UK</i>	<i>-5.9</i>	<i>52.2</i>	<i>-33.2</i>	<i>-8.2</i>

Source: (Eurostat, 2006)

Data indicated in italics have been used for the '2003' quantification. Negative numbers indicate that a MS is a net exporter. In that case, the 'net' domestic share (*ds_pri*, see Section A.2) used in the quantification of the S/D Index has been set to 1 (see also Table C.1 where the import dependencies have been set to 0 in such cases)

B.2 Additional assumptions and data requirements for future scenarios

For the 2020 quantification, the summary energy balances in (EC, 2003) and (EC, 2004) have been used as information sources. In particular, the demand and PES scores are based on data from these scenario studies. It should be noted that these scenarios do not always provide the data required for the S/D model. Additional but plausible assumptions have therefore been made to fill this data gap, see the examples outlined in Section C.4.

B.2.1 Final energy demand

The energy intensity development for industry and the tertiary sector is given as an index value in the EC scenarios. The changes in index values for 2005 and 2020 are used for calculation of the absolute energy intensities in 2020 (expressed as toe/M€), together with the absolute current (i.e. 2003) figures.

The EC scenarios provide explicit data for the transport energy intensities (toe/Mtkm and toe/Mpkm, for goods and passenger kilometres, respectively). Since the Odyssee transport data are not always consistent with the Eurostat or scenario data due to differences in definitions, the differences of the '2003' Odyssee data and the Eurostat data or '2005' scenario data are used as proxy to correct the '2020' scenario data.

The future toe/capita values for the residential final energy demand can be deduced from the projected size of the population and the final residential energy demand.

B.2.2 Energy conversion and transport

For the C+T part of the model, mainly the efficiency indicator (electricity branch of C+T tree) and CHP indicator (heat branch of C+T tree) of the scenarios have been used. All other parameters have not been changed, principally due to a lack of data in the public documentation of these scenarios. This applies to import capacities of electricity, reserve factors, and the transport fuel data. In theory, such information could be made available from details on the scenarios. An example of such detailed information is a more recent baseline scenario for the Netherlands, see Section C.4. For this Global Economy scenario estimates for the reserve factor for electricity production and the import capacity factor have been derived from the detailed POWERS calculations. POWERS is the electricity market simulation model used for the Reference Projections (ECN/MNP, 2005). The model calculates wholesale electricity prices, capacity allocation and the resulting fuel mix, with the projected electricity demands and the actual production park including investments in new capacity as exogenous inputs. The model takes into account scenario parameters like fuel prices, CO₂ prices and economic growth that is reflected in the development of the electricity demand. A description of the model can be found in (Seebregts et al., 2005).

B.2.3 Primary energy sources

The primary energy mix and the import dependencies can be directly retrieved from the summary energy balances.

B.3 Limitations and flexibility

B.3.1 Limitations

The quantification of the S/D index has some limitations that have been already addressed but are here summarised for convenience.

1. The assessments on the basis of the S/D Index model are partly subjective. However, it should be noted that any assessment of this type will be subjective.
2. Comparison of index values with other Member States or some EU benchmark may lead to undesired ‘wishful’ weighing and scoring in order to get a good mark.
3. Depletion of fossil reserves is an aspect sometimes included in indicators for long-term security of supply, see e.g. the indicators developed in (Jansen et al., 2004). Depletion has been intentionally left out in the S/D index. Remaining reserves, either domestic or from countries of origin is an important aspect in an overall assessment. Within the procedure outlined in this report, depletion could be dealt with in the scenario application of the S/D index, or the aspect could be added to the S/D model, once reserves really become an issue of concern.
4. Definitions, accuracy and incompleteness in ‘objective’ data sources must be carefully considered
5. The usual Eurostat energy statistics are always somewhat delayed: ‘now’ may be 2-3 years ago. National statistics usually have more recent data if necessary.
6. When applying the S/D index model for a future energy system, it should be noted that the larger the time horizon, the larger the future uncertainties are. Different future scenarios for one Member State may show quite diverging energy images, with quite differently emerging values for the S/D index. In that case, comparisons are still meaningful. On the contrary, S/D Index values comparisons between Member States should at least be based on the same common ‘EU’ scenario in order to let the comparison be meaningful.

B.3.2 Flexibility

The detail of the energy system model that forms the basis for scoring the security of supply has therefore been carefully selected in order to arrive at a model that:

1. Is still transparent and simple enough to understand the results relatively easy, given the data and other assumptions
2. Enables sensitivity and uncertainty analyses on key assumptions and data parameters
3. Depicts the entire energy system in one (graphical) figure.
4. Can be quantified without the need for detailed data mining, as it is based on existing energy system data and existing other indicators.

On the other hand, the model has been defined such that it enables flexibility in terms of:

1. Increasing the level of detail, e.g. one could make a distinction in imports coming from outside the EU and Norway, and add the country or regional detail to those imports with also different weights.
2. Modifying the existing weights and scoring criteria which has been demonstrated in a few sensitivity analyses in Appendix C.
3. Modifying the nature of the scoring rules.

The parameter and data uncertainties, either with respect to the weighing factors in the model or with respect to selected criteria used in the scoring rules, have been analysed in sensitivity analyses. These analyses have shown which uncertain parameters have the largest impact on the S/D index value, and which should therefore receive special attention.

Appendix C Additional quantitative results

In addition to the results reported in Chapter 6, this Appendix provides more quantification results. This Appendix includes results obtained with the updated S/D Index model for the EU-27 and the 27 Member States. Subsequently, the following cases are reported:

1. Appendix C.1: Detailed results (in tables) for the 27 Member States individually and the EU-27 as a whole.
2. Appendix C.2: Sensitivity cases with the ‘threshold’ for oil and gas set to 30% instead of 0% i.e. the net domestic share or the share of the imports from within the EU+Norway should at least be 30% before a positive score on the PES oil or gas part applies. The 30% choice was the value selected in the quantification with the old S/D Index model for the EU-25 and some selected Member States, reported here as part of Appendix C.3.


These sensitivity results are reported in the type of figures as presented in Chapter 6, for the overall S/D Index and for the main Sub-indices at the PES, C+T and Demand level.

Some notions on the old model are equally valid for the update of the S/D Index model. Therefore and also for reasons of completeness, the results obtained with the previous version of the S/D Index model as reported in (Scheepers et al, 2006) are presented in Appendix C.3. Additional and illustrative sensitivity analyses are presented to show the impact of the most important weighing factors, and the use of alternative scenarios for the Netherlands and the UK.


For a discussion of the results, the reader is referred to Chapter 6.

C.1 Detailed results


S/D Index, 2005 and 2020

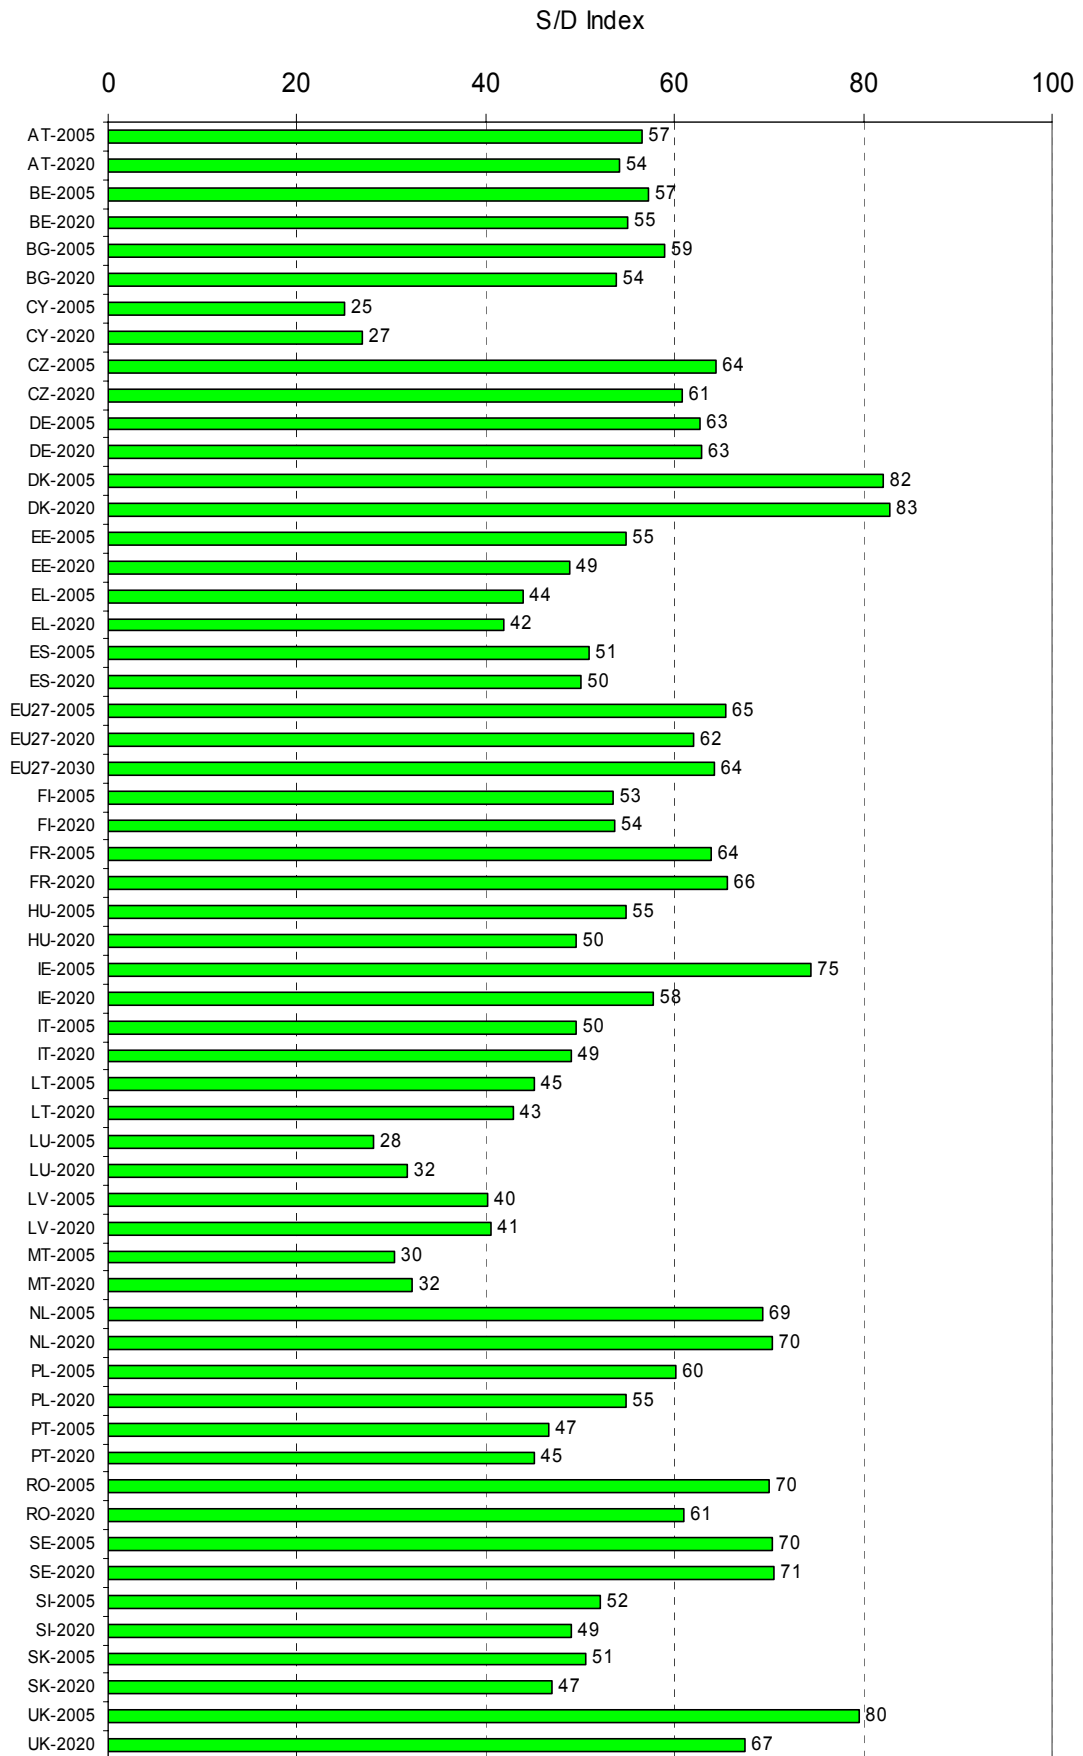


PES Sub-Index, 2005 and 2020

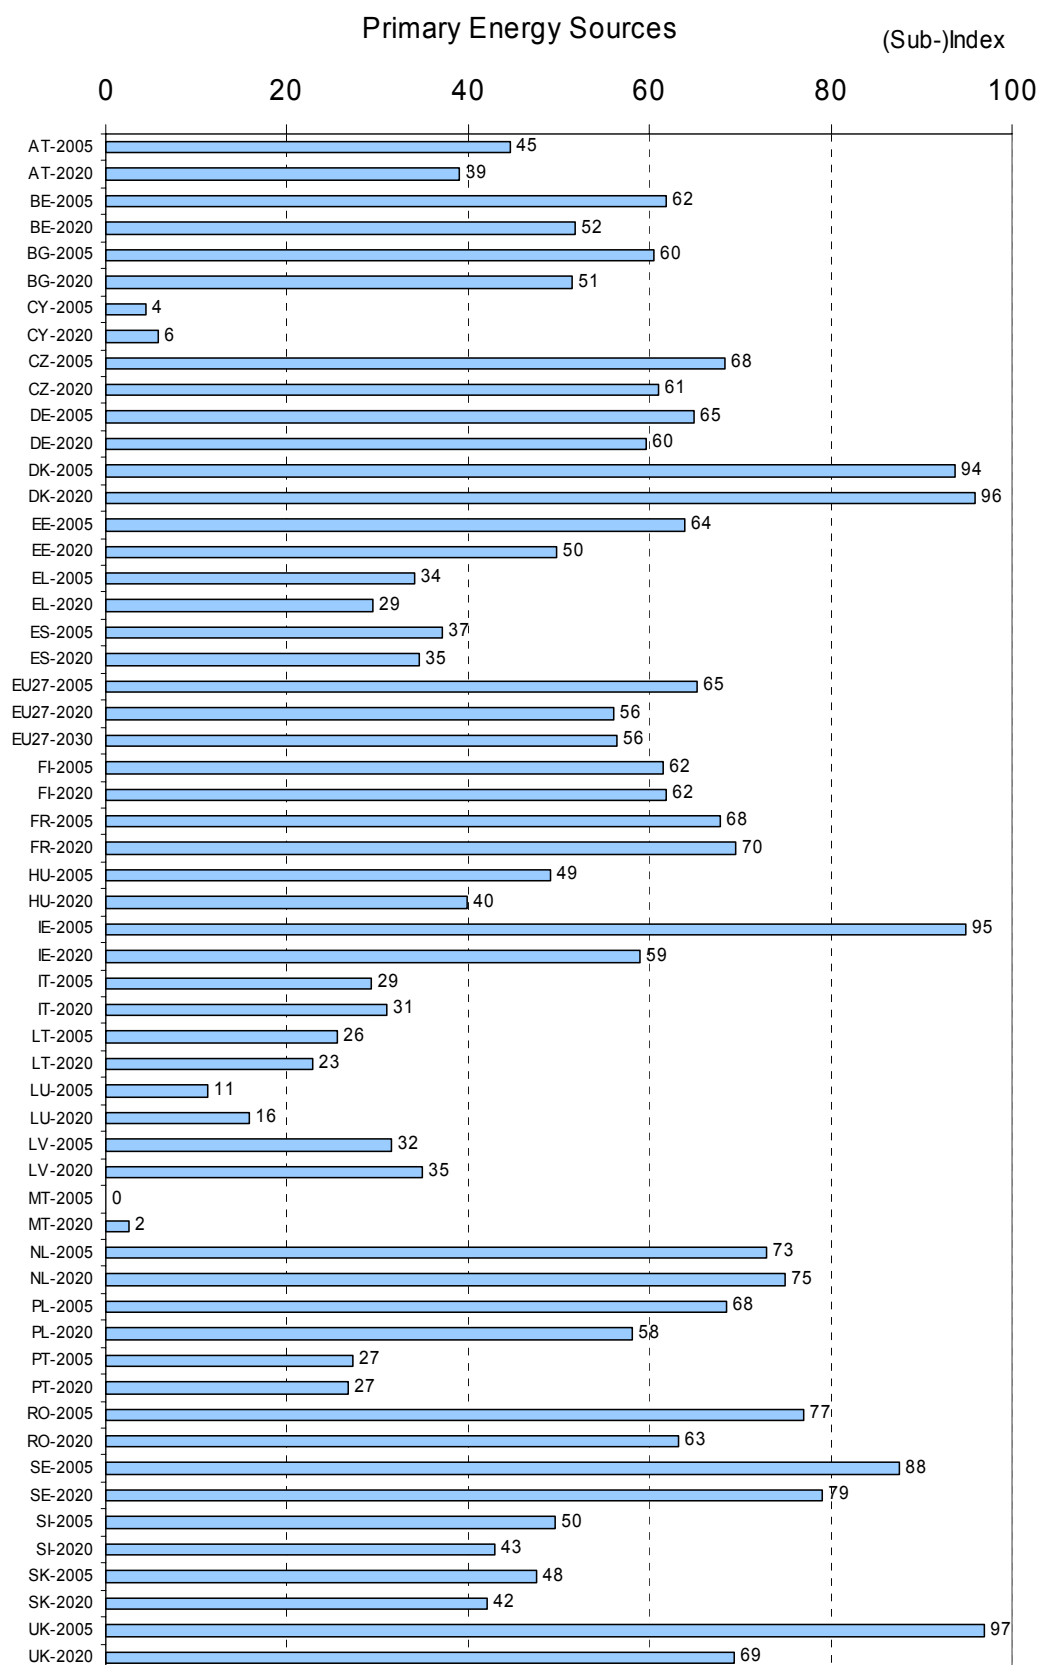


C+T Sub-index, 2005 and 2020

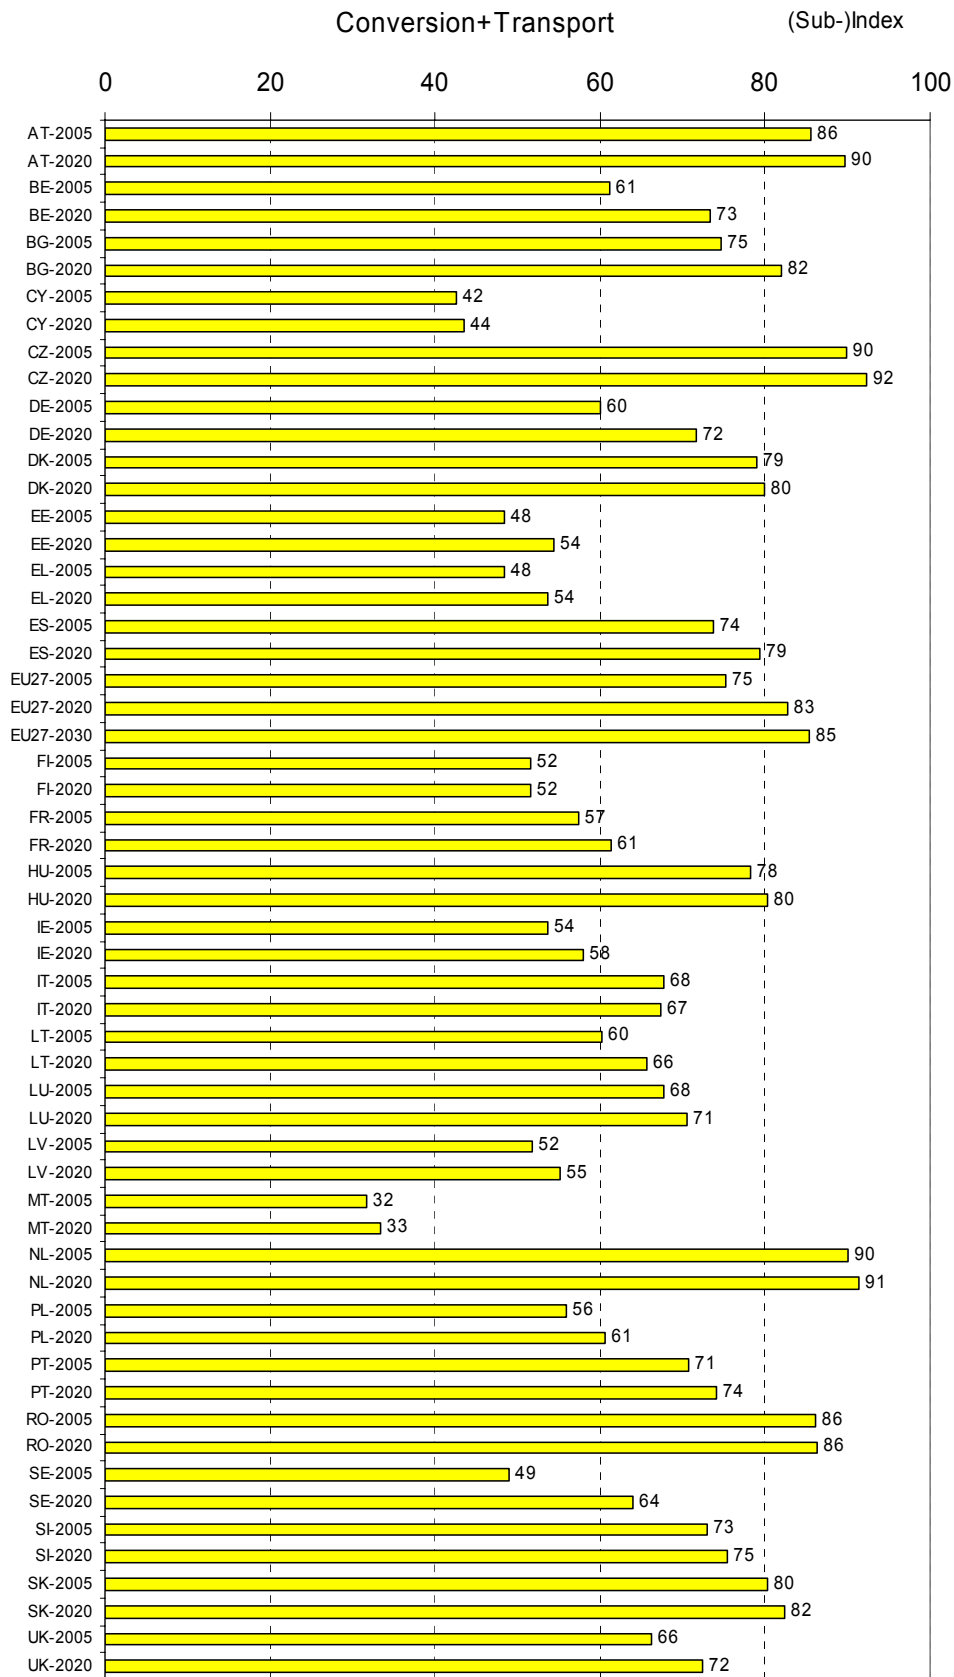


Demand Sub-index, 2005 and 2020

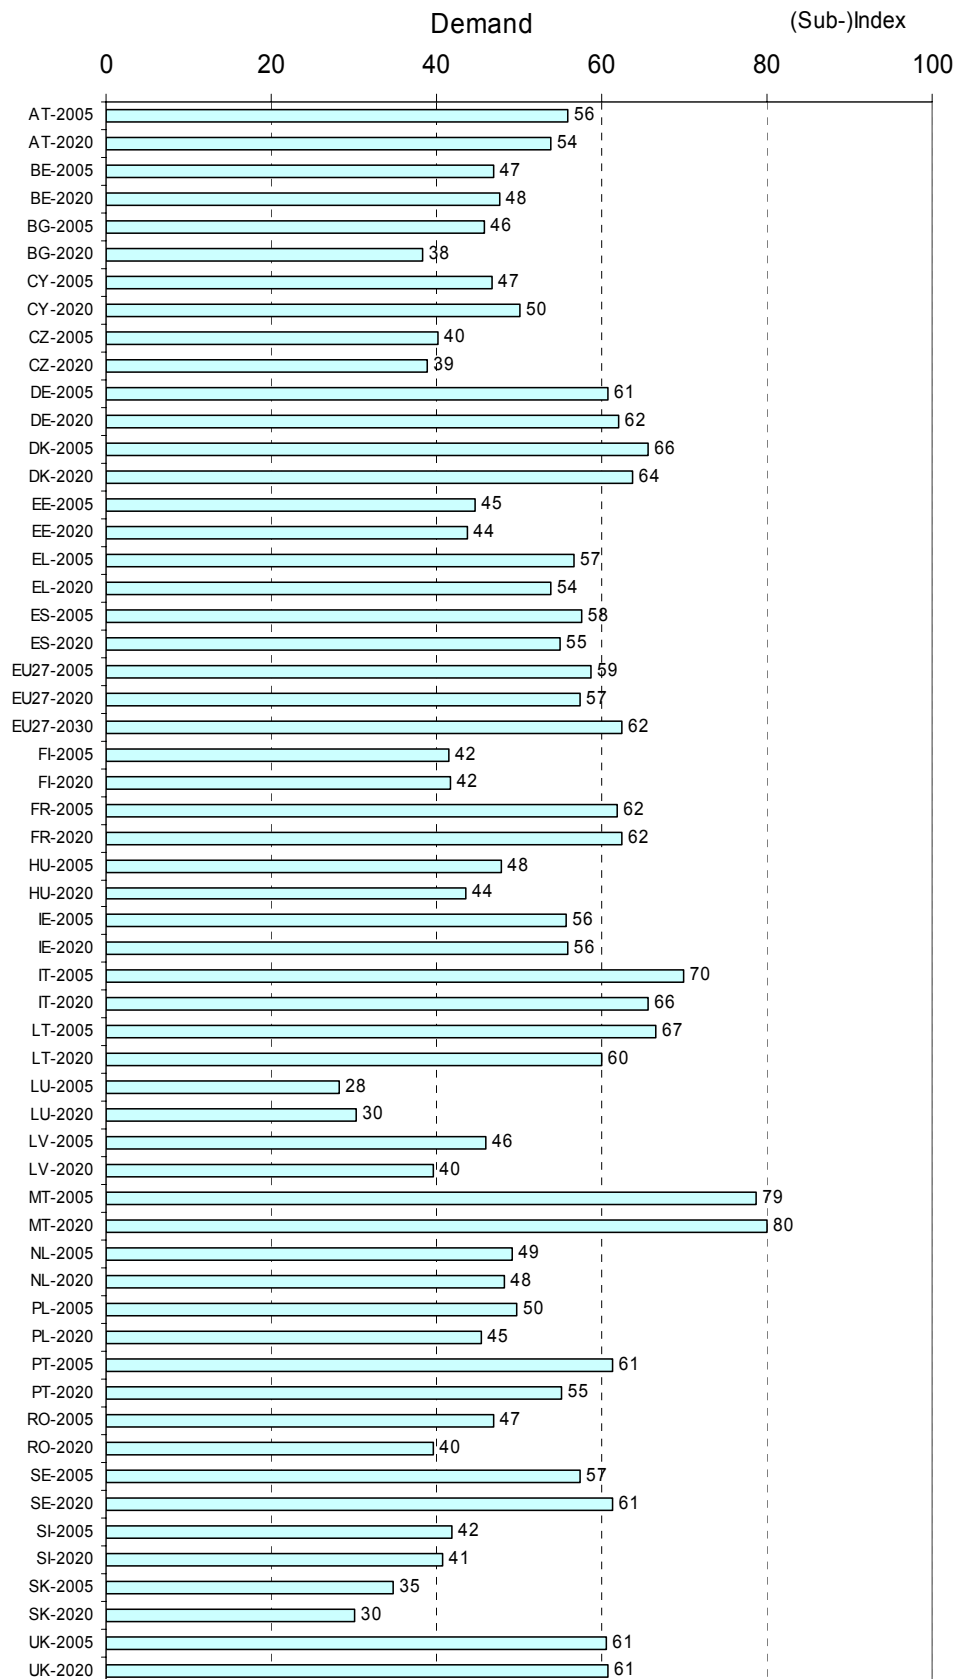

PES Sub-Index, 2005, sorted

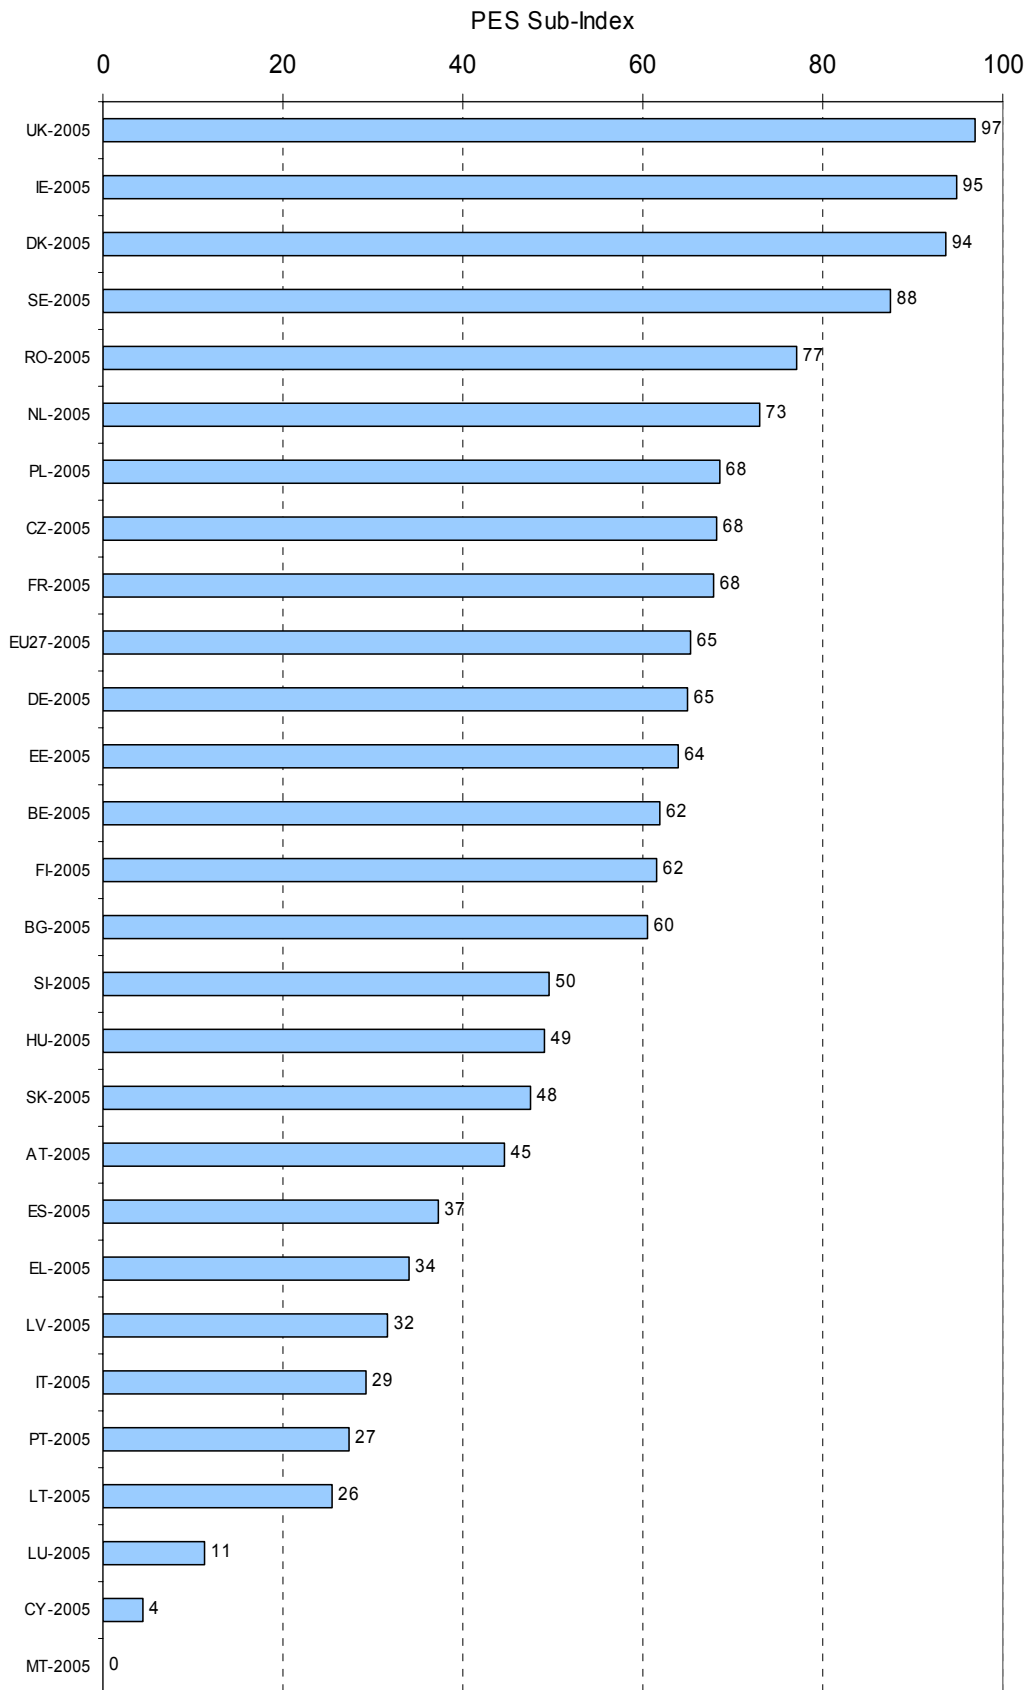

PES Sub-Index, 2020, sorted

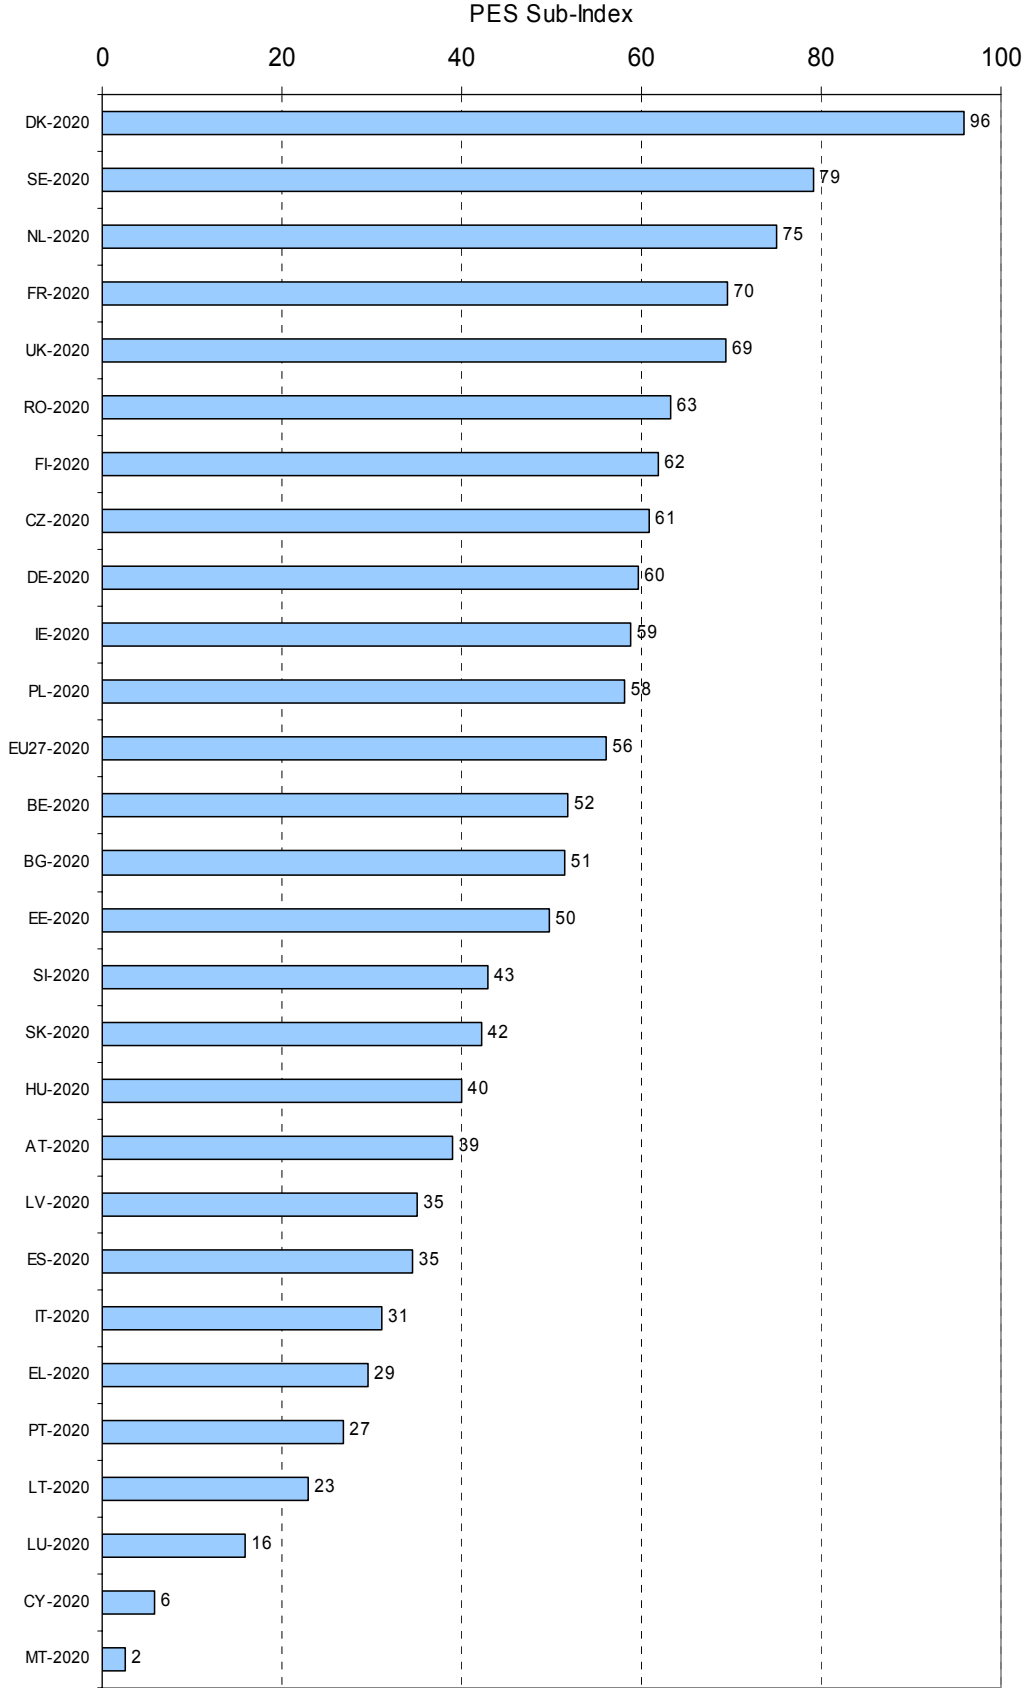

C.2 Sensitivity cases

C.2.1 Sensitivity on thresholds oil and gas


One major difference compared with the previous S/D Index model is the choice of the threshold used in scoring the PES parts of oil and gas. The previous model (Scheepers et al., 2006) used a 30% threshold, while the updated model has no threshold, i.e. a threshold of 0%.

The main effect of the change will be that the PES scores for oil and gas will improve for those Member States having domestic shares between the two thresholds or having import shares from within EU+Norway between these two thresholds.


On average (for 27 MS), the S/D Index becomes 3 points lower with the old thresholds of 30%. Roughly, the ranking order of the MS remains unaltered. The EU-27, Germany (DE), Belgium (BE), Hungary (HU) and Italy (IT) are ranked lower. Italy even becomes a 'low scoring' MS, while Germany does no longer belong to the top-10.

C.2.2 Weight of the PES part versus other parts


S/D Index, 2005 and 2020, 30% thresholds oil and gas ...

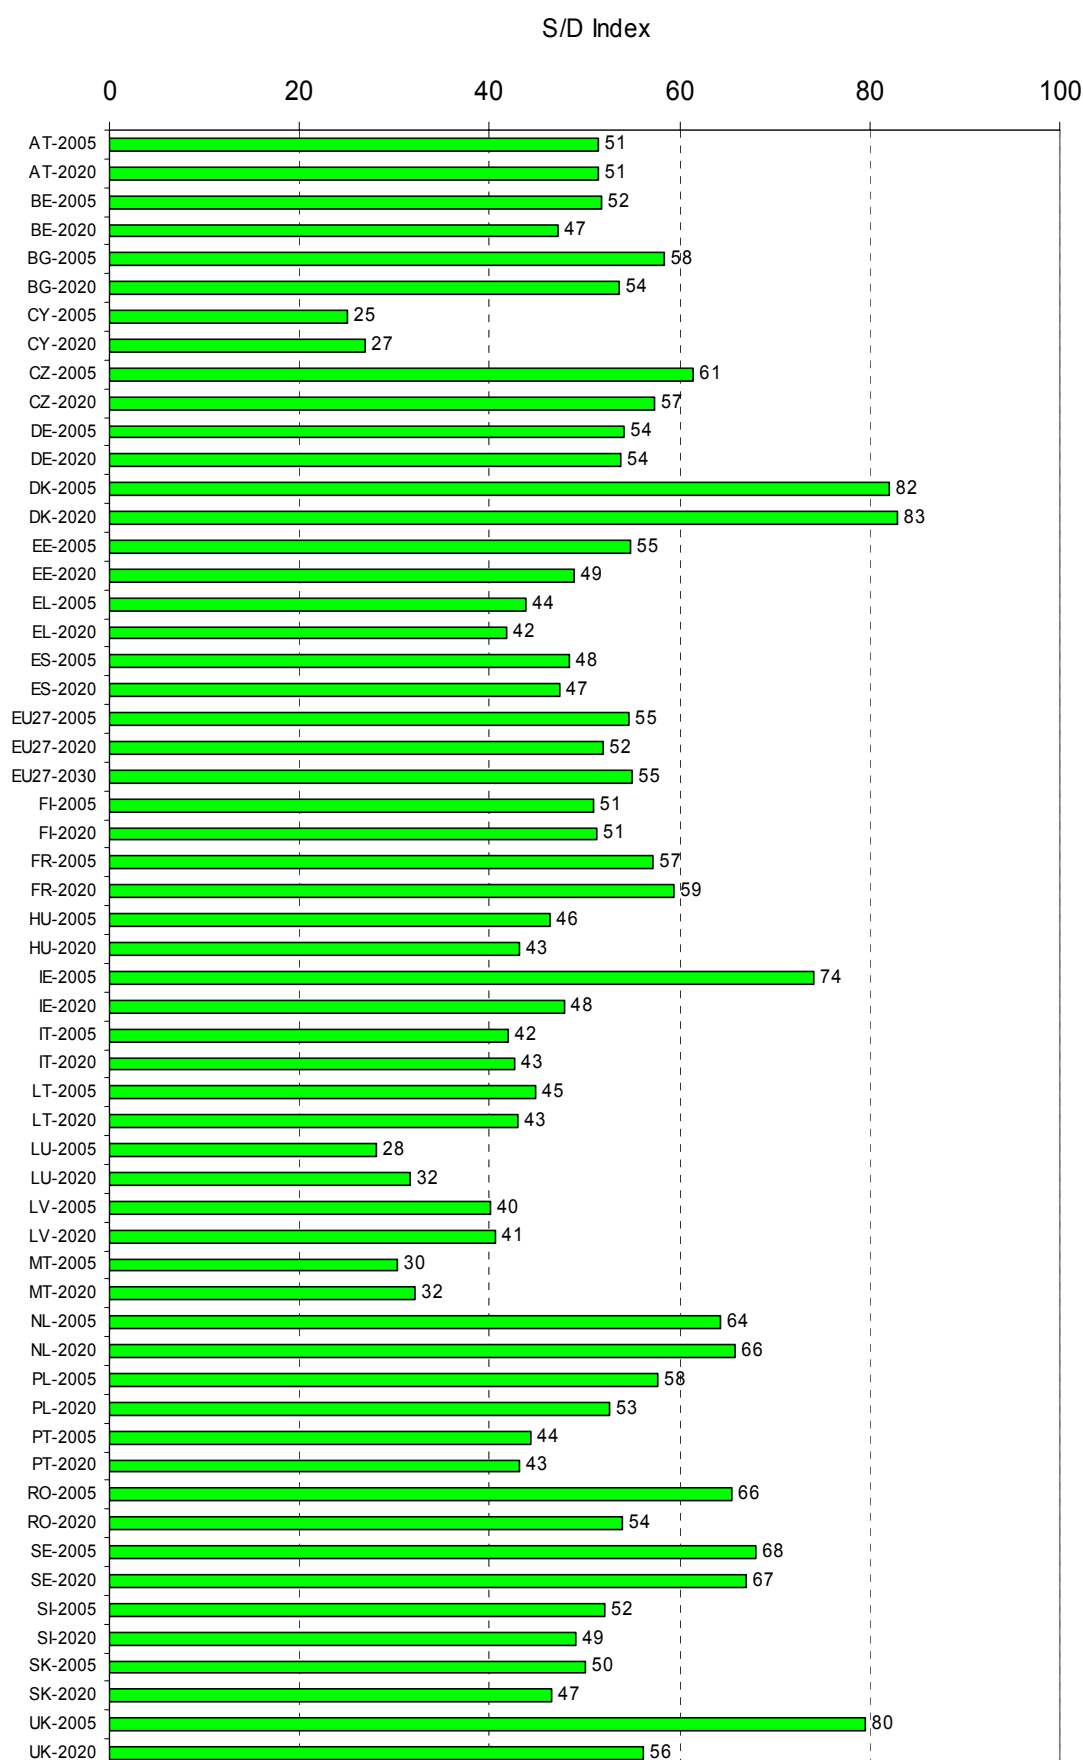


PES Sub-Index, 2005 and 2020, 30% thresholds oil and gas ...

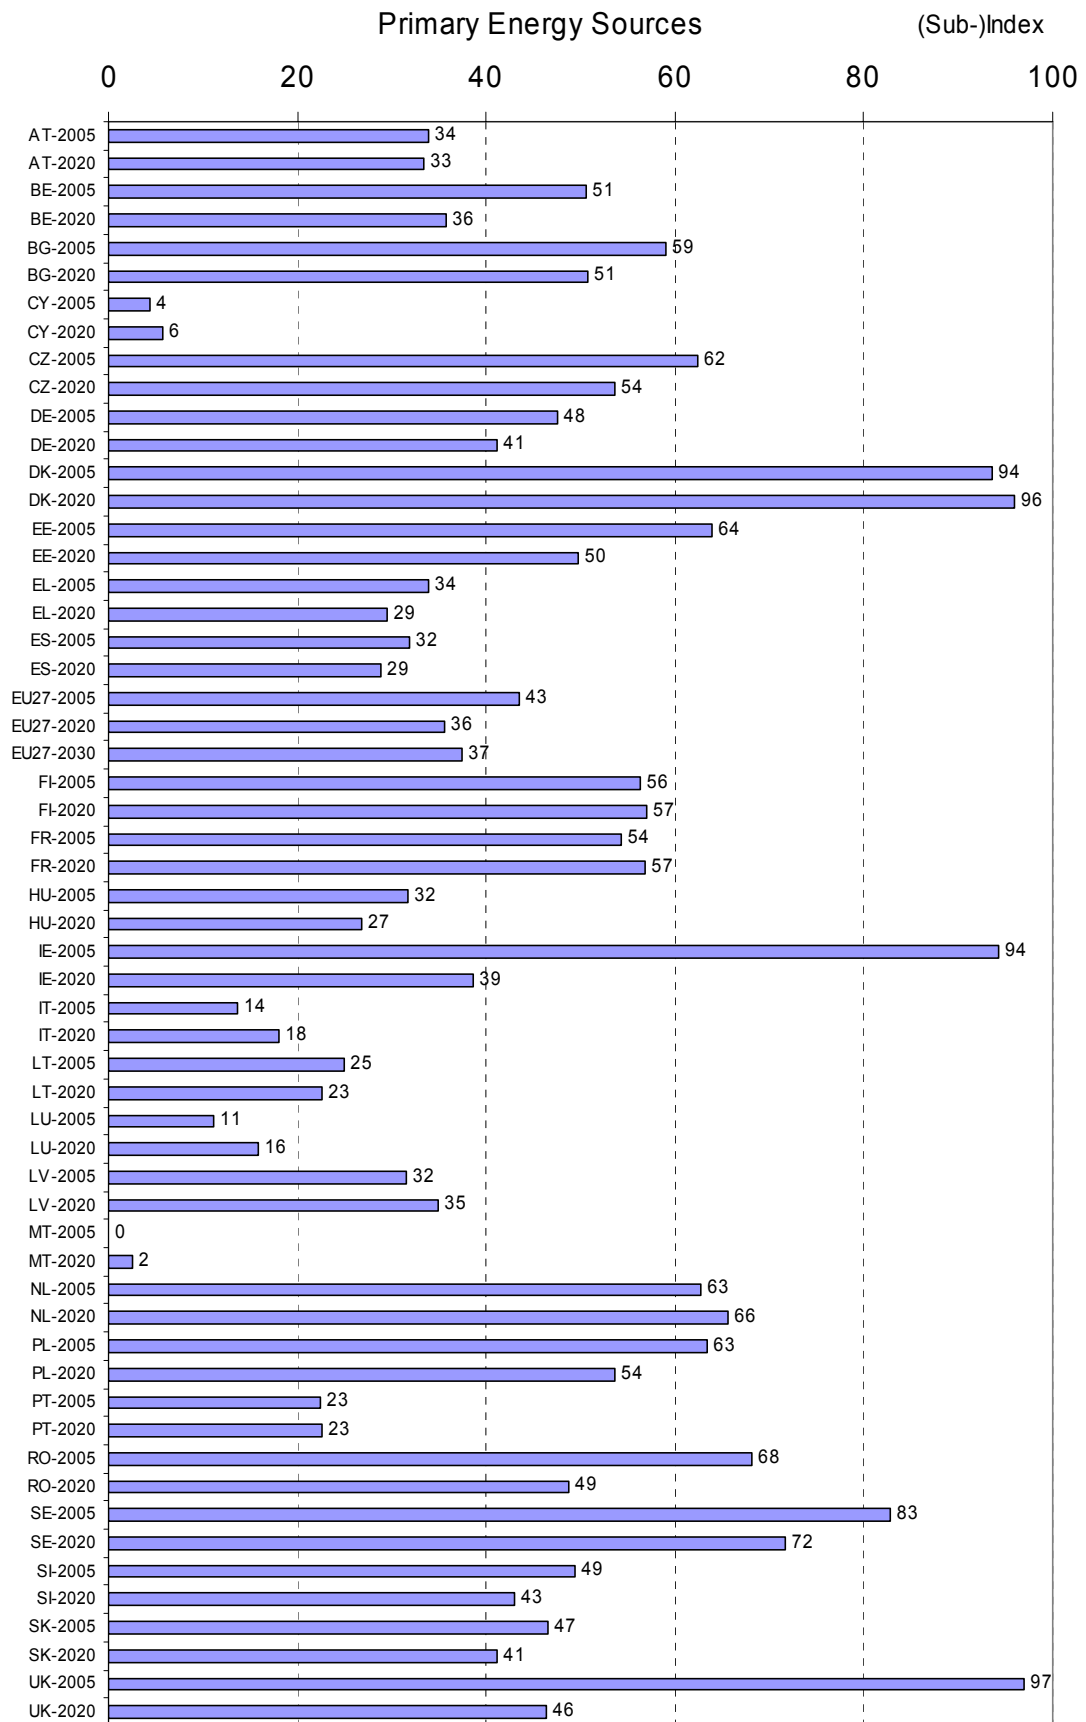

S/D Index, 2005, 30% thresholds oil/gas, sorted

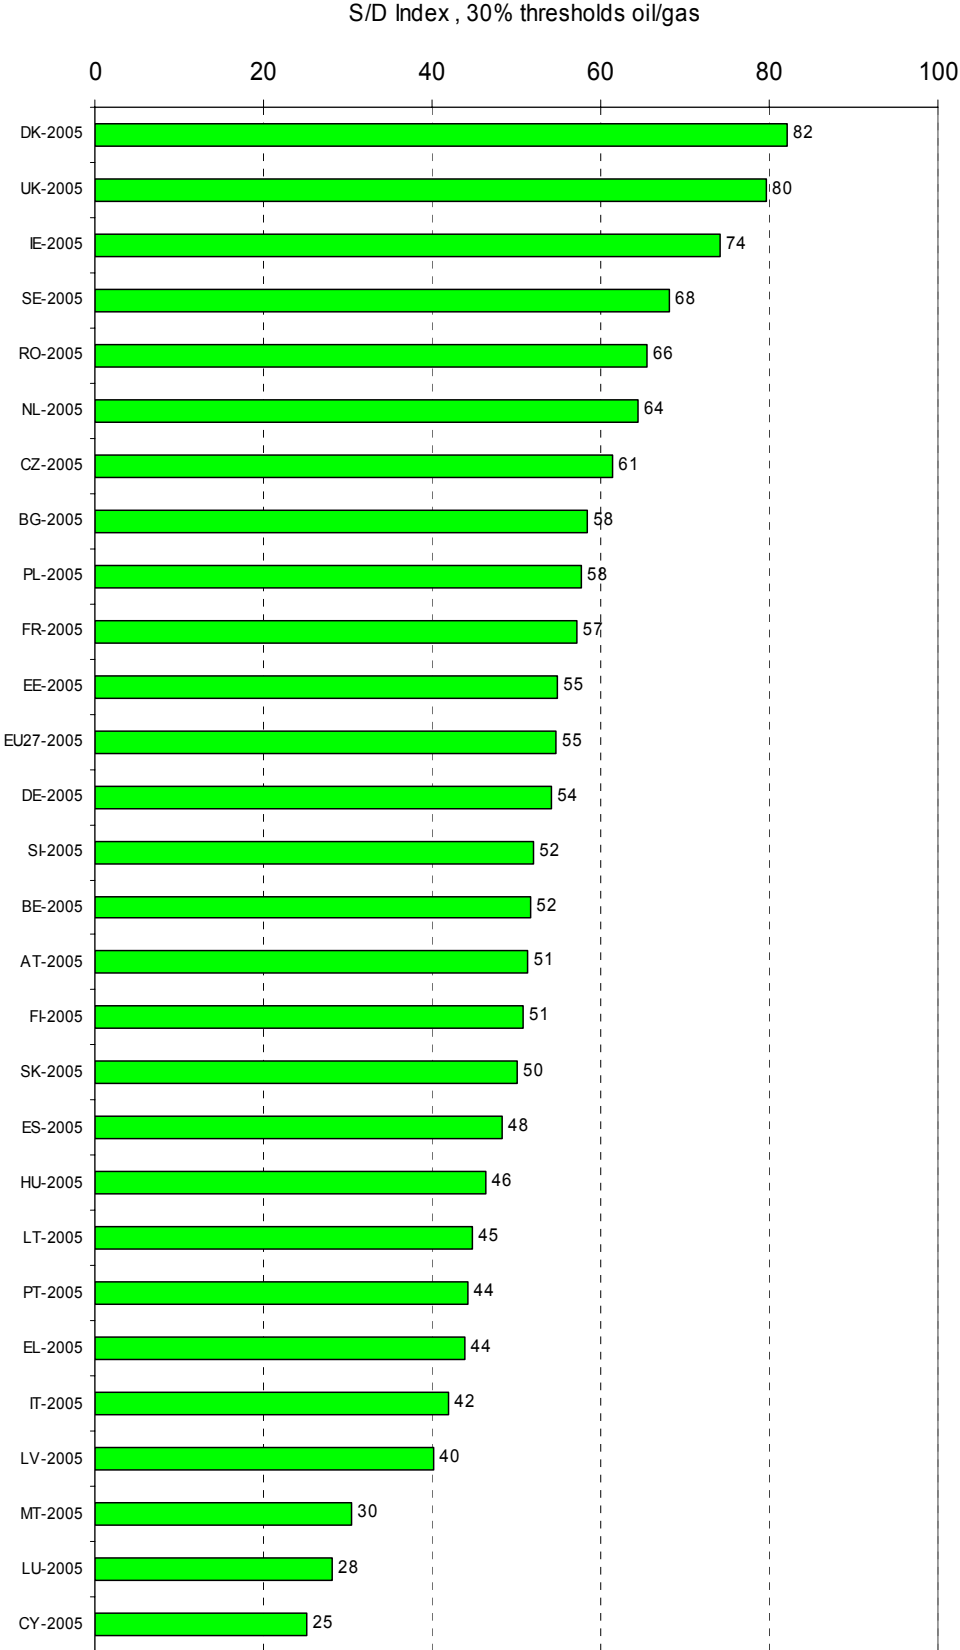

PES Sub-Index, 2005, 30% thresholds oil/gas, sorted

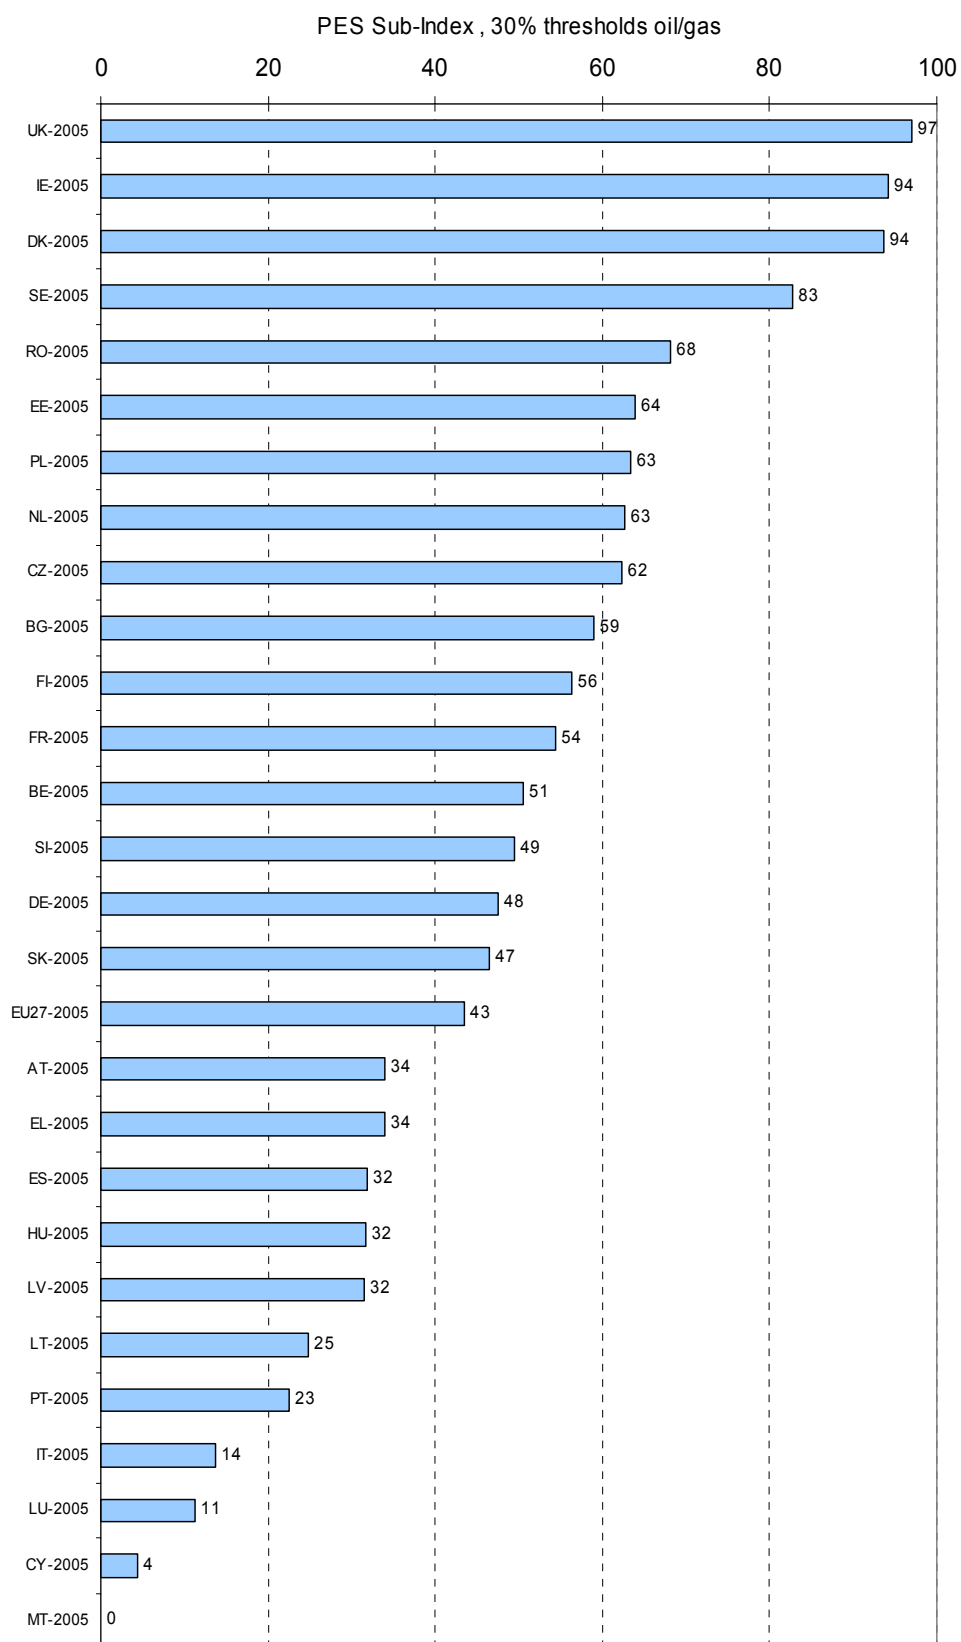

C.3 Quantifications based on previous S/D Index model¹⁶

C.3.1 2005 with selected Member States

Results of the analysis are presented in Table C.1. For the four Member States and the EU two columns are shown. The first column lists weights (see also Table C.1) and shares of final demand and the primary energy mix explaining the contributions of sub-indices to the overall S/D Index value. The second column shows the S/D Index and the major sub-indices. For a review of energy security supply the sub-indices for demand, supply, energy conversion and transport (C+T) and primary energy sources (PES) are at least as important as the S/D Index (the bold figures in Table C.1). Appendix A and B give a further description and explanation of the methodology and data used.

Table C.1 *Today's S/D Index for energy supply security for a number of selected EU MS and the EU: old model*

	Spain		The Netherlands		UK		Poland		EU-25	
	Weight/ share	Index	Weight/ share	Index	Weight/ share	Index	Weight/ share	Index	Weight/ share	Index
S/D Index		51.1		68.3		77.5		65.2		53.9
Demand	0.3	75.2	0.3	58.1	0.3	66.8	0.3	49.2	0.3	67.9
Industry	0.33	47	0.27	45	0.24	64	0.30	17	0.28	65
Residential	0.15	100	0.20	56	0.30	47	0.33	75	0.27	58
Tertiary	0.11	70	0.24	53	0.13	67	0.20	14	0.15	67
Transport	0.41	90	0.29	76	0.34	85	0.16	100	0.30	80
Supply	0.7	40.8	0.7	72.7	0.7	82.0	0.7	72.0	0.7	47.9
C+T	0.3	63.1	0.3	96.0	0.3	45.6	0.3	84.0	0.3	60.2
Electricity	0.3	88	0.3	90	0.3	59	0.3	86	0.3	64
Heat	0.5	47	0.5	100	0.5	35	0.5	100	0.5	55
Tr. Fuels	0.2	67	0.2	94	0.2	51	0.2	40	0.2	67
PES	0.7	31.2	0.7	62.7	0.7	97.7	0.7	66.9	0.7	42.7
Oil	0.50	0	0.38	10	0.34	100	0.22	0	0.37	0
Gas	0.16	0	0.46	100	0.38	100	0.11	6	0.24	24
Coal	0.15	81	0.11	70	0.16	85	0.62	100	0.18	89
Nuclear	0.12	100	0.01	100	0.10	100	0.00	100	0.14	100
RES	0.07	100	0.02	100	0.01	100	0.05	100	0.06	100
Other	0.00	100	0.02	100	0.00	100	0.00	100	0.00	100

Of all selected countries the S/D Index value for *Spain* is the lowest. This is mainly caused by large import dependencies for oil (with a 50% PES-share) and natural gas, but some energy conversion and transport aspects also contribute negatively to the value of the S/D Index. In contrast with the low figures at the supply side, the Spanish sub-index for demand is the highest of the selected countries, due to low energy intensity of the residential and transport sectors.

The S/D Index for *The Netherlands* has a moderate value. Indigenous natural gas production and a good score on energy conversion (e.g. electricity generation efficiency, CHP share) and energy transport (e.g. electricity import capacity) have a positive influence on the sub-index value for supply, whereas the import dependency for oil and coal contributes negatively to this sub-index value. On the demand side the value for the industrial sector is relatively low.

The high score of the sub-index for the primary energy sources results in a relatively high S/D Index for the *United Kingdom*. Much weaker are the index values for energy conversion and transport aspects and the energy intensity of the residential sector and with that reducing the UK's S/D index.

¹⁶ Note this Appendix C.3 corresponds with Sections 5.1, 5.2, and 5.3 of the previous report ECN-C-06-039.

At the supply side *Poland* profits from the indigenous coal production (with a PES-share of 62%). The sub-index value for primary energy sources is reduced, however, by the strong dependency of oil and gas imports. A relative poor score at the demand side (industry and tertiary sectors) negatively influences the overall S/D Index value for Poland though.

The calculated S/D Index of the *European Union* (EU-25) is only slightly higher than the index value of Spain. This is explained by the composition of contributing factors: the sub-index for demand shows a quite reasonable value, but the sub-index for supply reduces the overall S/D Index value, in particular the sub-index value for primary energy sources due to the strong import dependencies for oil and natural gas. Also the sub-index for energy conversion and transport has a relatively low value.

C.3.2 2020 based on 'old' Trends to 2030 scenario


An essential element in the whole idea about the standards is to look forward. This is especially the case with respect to the development of energy balances, as they will evolve over time. For the UK it is quite clear for instance that its domestic oil and gas production will decrease and that imports from outside the EU will have to increase, with strong impacts for the UK's S/D Index. As another example, it could be questioned to what extent Poland will be able to continue its large domestic coal production, considering economic and environmental sustainability.

The use of the S/D Index in a scenario approach is illustrated in Table C.2 and in Figure C.1, which shows the more aggregated results and a comparison with today's values. On the basis of scenario data taken from the base case scenario of EU Trends to 2030 (EC, 2003) S/D Index values have been calculated for the selected Member States and the European Union (EU-25). According to the scenario the S/D Index for *Spain* decreases with 3.2 points compared to the today's index value due to an increased import dependency for gas and oil, and lower sub-index values for energy intensity. The S/D Index for *The Netherlands* increases slightly, mainly due to an increase of the domestically produced gas in the fuel mix. In 2020 the *United Kingdom* will become import dependent for natural gas. It is assumed that 50% of these imports will originate from outside the EU and Norway. The sub-index for PES drops with 16.3 points resulting in 4.5 lower S/D Index for the UK. Figure C.1 also shows a sensitivity case for the UK with a 75% import dependency for oil and gas in 2020, based on new insights (FCO, 2004; DTI, 2006), see also Appendix C.3. The PES index also drops for *Poland*. Due to an increasing import dependency - indigenous coal is replaced by imported gas - the sub-index for PES drops with 19.8 points and results in a decrease of the overall S/D Index with 10.2 points. Also the import dependency of the *European Union* is the main cause of a decrease of the PES sub-index with 11.9 points and a decrease of the overall S/D Index with 4.9 points.

Table C.2 S/D Index for energy supply security for a number of selected EU MS and the EU in 2020 on the basis of EC baseline scenarios: old model

	Spain		The Netherlands		UK		Poland		EU-25	
	Weight/s hare	Index	Weight/s hare	Index	Weight/s hare	Index	Weight/s hare	Index	Weight/s hare	Index
S/D Index		47.9		68.7		72.0		55.0		49.0
Demand	0.3	70.0	0.3	57.7	0.3	67.1	0.3	46.1	0.3	66.7
Industry	0.30	45	0.24	44	0.24	65	0.24	25	0.28	65
Residential	0.17	82	0.21	51	0.28	45	0.34	44	0.25	52
Tertiary	0.12	68	0.24	54	0.14	66	0.20	18	0.15	67
Transport	0.40	85	0.31	75	0.34	87	0.23	95	0.32	80
Supply	0.7	38.5	0.7	73.5	0.7	74.1	0.7	58.8	0.7	41.3
C+T	0.3	69.8	0.3	91.5	0.3	57.1	0.3	86.3	0.3	66.1
Electricity	0.3	95	0.3	100	0.3	66	0.3	94	0.3	72

Heat	0.5	56	0.5	85	0.5	54	0.5	100	0.5	62
Tr. Fuels	0.2	67	0.2	94	0.2	51	0.2	40	0.2	67
PES	0.7	25.1	0.7	65.7	0.7	81.4	0.7	47.1	0.7	30.8
Oil	0.45	0	0.36	10	0.34	100	0.28	0	0.36	0
Gas	0.29	0	0.52	100	0.47	64	0.25	0	0.32	0
Coal	0.06	80	0.06	70	0.07	77	0.42	100	0.13	85
Nuclear	0.10	100	0.00	100	0.07	100	0.00	100	0.11	100
RES	0.10	100	0.04	100	0.04	100	0.05	100	0.08	100
Other	0.00	100	0.02	100	0.01	100	0.00	100	0.00	100

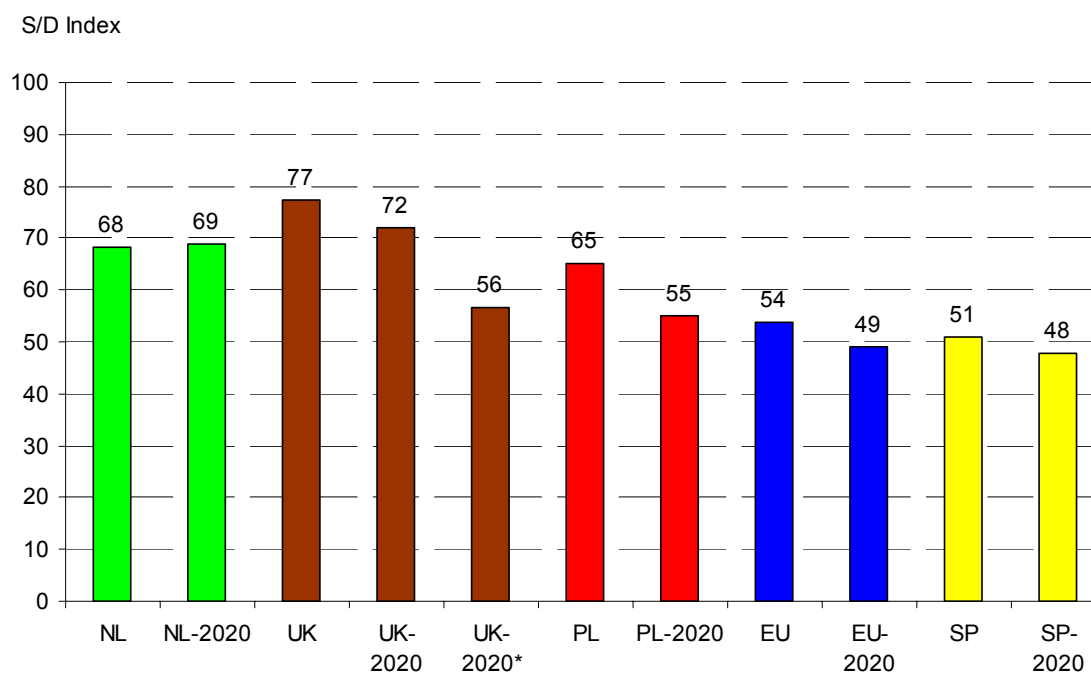

*) With 75% import dependency for oil and gas.

Figure C.5 S/D Index for today and 2020, EU-25 and four Member States: old model

C.3.3 Focusing at sub-indices

The overall S/D index value is just one figure that indicates the level of energy security of supply in the medium and long term. The advantage of the modelling and quantification approach is that it enables focusing at the sub-indices and sub-scores as well. The next Table C.3 shows all relevant figures in one view. These cases have largely been reported in Chapter 6 (Sections 6.1 and 6.2) but the import dependencies of the primary energy sources and the fraction of the imports coming from outside the EU/Norway are presented too in this table. This helps in explaining and understanding the PES score. Due to the weights of Supply and the PES herein, the total S/D index is usually largely determined by the PES sub-index. In that sense, the PES sub-index could be compared to other (long-term) security of supply indicators that often are restricted to the supply of PES only (see e.g., Jansen et al., 2004).

It is important to note that Table C.3 also shows the sub-indices of the branches: Demand, Supply, Conversion+Transport, and Primary Energy Sources. In this way, comparisons, either intertemporal (now and 2020) or between countries can be made at the underlying parts of the energy system.

Table C.3 *Summary of results, default values: old model*

S/D Index	Netherlands		NL-2020		UK		UK-2020		UK-2020-75%		Poland		PL-2020		EU-25		EU-25-2020		Spain		SP-2020			
	Import	Non-EU	Import	Non-EU	Import	Non-EU	Import	Non-EU	Import	Non-EU	Import	Non-EU	Import	Non-EU	Import	Non-EU	Import	Non-EU	Import	Non-EU	Import	Non-EU		
Demand	0.3	68.3	68.7	0.3	77.5	72.0	0.3	72.0	0.3	56.5	65.2	0.3	55.0	53.9	0.3	49.0	49.0	0.3	51.1	51.1	0.3	47.9	47.9	
Industry	0.27	58.1	57.7	0.24	66.8	67.1	0.24	65	0.24	65	49.2	0.24	46.1	67.9	0.28	66.7	66.7	0.28	75.2	75.2	0.33	70.0	70.0	
Residential	0.20	56	51	0.30	47	45	0.28	45	0.28	45	75	0.34	44	58	52	52	52	0.25	100	100	0.15	82	82	
Tertiary	0.24	53	54	0.13	67	66	0.14	66	0.14	66	14	0.20	18	67	67	67	67	0.15	70	70	0.11	68	68	
Transport	0.29	76	75	0.34	85	87	0.34	87	0.34	87	100	0.23	95	80	80	80	80	0.32	90	90	0.41	85	85	
Supply	0.7	72.7	73.5	0.7	82.0	74.1	0.7	74.1	0.7	51.9	72.0	0.7	58.8	47.9	0.7	41.3	41.3	0.7	40.8	40.8	0.7	38.5	38.5	
C+T	0.3	96.0	91.5	0.3	45.6	57.1	0.3	57.1	0.3	57.1	84.0	0.3	86.3	60.2	0.3	66.1	66.1	0.3	63.1	63.1	0.3	69.8	69.8	
Electricity	0.3	90	100	0.3	59	66	0.3	66	0.3	66	86	0.3	94	64	64	72	72	0.3	88	88	0.3	95	95	
Heat	0.5	100	85	0.5	35	54	0.5	54	0.5	54	100	0.5	100	55	55	62	62	0.5	47	47	0.5	56	56	
Tr. Fuels	0.2	94	94	0.2	51	51	0.2	51	0.2	51	40	0.2	40	67	67	67	67	0.2	67	67	0.2	67	67	
PES	0.7	62.7	65.7	0.7	97.7	81.4	0.7	81.4	0.7	49.7	66.9	0.7	47.1	42.7	0.7	30.8	30.8	0.7	31.2	31.2	0.7	25.1	25.1	
Oil	0.38	10	10	0.34	100	100	0.34	100	0.34	56	0	0.28	0	0	0	0	0	0.36	0	0	0.50	0	0	
Gas	0.46	100	100	0.38	100	64	0.47	64	0.47	29	6	0.25	0	24	24	0	0	0.32	0	0	0.16	0	0	
Coal	0.11	70	70	0.16	85	77	0.07	77	0.07	77	100	0.42	100	89	89	85	85	0.13	81	81	0.15	80	80	
Nuclear	0.01	100	100	0.10	100	100	0.07	100	0.07	100	100	0.00	100	100	100	100	100	0.11	100	100	0.12	100	100	
Ren. ES	0.02	100	100	0.01	100	100	0.04	100	0.04	100	100	0.05	100	100	100	100	100	0.08	100	100	0.07	100	100	
Other	0.02	100	100	0.00	100	100	0.01	100	0.01	100	100	0.00	100	100	100	100	100	0.00	100	100	0.00	100	100	
Import dependencies	Import	Non-EU	Import	Non-EU	Import	Non-EU	Import	Non-EU	Import	Non-EU	Import	Non-EU	Import	Non-EU	Import	Non-EU	Import	Non-EU	Import	Non-EU	Import	Non-EU	Import	Non-EU
Oil	0.91	0.63	1.00	0.63	0.00	0.31	0.00	0.31	0.75	0.31	0.97	0.99	0.98	0.77	0.73	0.93	0.73	1.00	0.90	1.00	1.00	1.00	0.90	
Gas	0.00	0.00	0.00	0.00	0.00	0.50	0.36	0.50	0.75	0.50	0.66	1.00	0.90	0.53	0.85	0.75	0.85	0.99	1.00	1.00	1.00	1.00	1.00	
Coal	1.00	1.00	1.00	1.00	0.49	0.76	0.76	1.00	0.76	0.00	0.00	0.00	0.00	0.35	0.50	0.63	0.50	0.63	0.68	0.68	0.68	0.68	0.68	
Nuclear	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	
Ren. ES	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.01	0.00	0.01	0.00	0.00	0.00	0.00	0.00	0.00	
Other	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	

C.3.4 Additional sensitivity analyses on most important weights

The main sources of uncertainty which effects the value of the overall S/D index are the weighing factors that are based on expert judgment. These importance measures factors have been quantified and illustrated for two cases in this Appendix C.3.6, in combination with the various scoring criteria, and based upon a multi-variate sensitivity analysis. For these two cases/countries, it appeared that the S/D index varied about 10% when the weights varied by +/- 0.1.

The main overall important factors are the weighing factors up front in the model, viz. the weight of supply (w_{sup}) versus demand (w_{dem}), and within the supply part, the weight of the primary energy sources (w_{pes}) versus conversion and transport (w_{ct}).

$$w_{sup} + w_{dem} = 1$$

$$w_{pes} + w_{ct} = 1$$

If the other weights at lower sub-branches and the scoring criteria remain unaltered, the impact of changing the upfront weights can be easily quantified and displayed by changing only the two weights w_{sup} and w_{pes} .

For a more extreme case, the weights for supply and PES have been changed from 0.7 to 0.9 (hence, decreasing demand and C+T weights from 0.3 to 0.1). The results with these weights are displayed in Table C.4. The overall S/D index value changes in this case. The scores more resemble the sub-index value of the Supply/Primary Energy Sources.

Table C.4 *Summary of results, with 0.9 instead of 0.7 weights for supply and primary energy sources (demand and C+T 0.1 instead of 0.3): old model*

	Netherlands	NL- 2020	UK	UK- 2020	UK- 2020- 75%	Poland	PL- 2020	EU-25	EU-25- 2020	Spain	SP- 2020
Changed (0.9)	65.2	67.2	89.9	77.7	52.1	66.7	50.5	46.8	37.5	38.5	33.6
Default (0.7)	68.3	68.7	77.5	72.0	56.5	65.2	55.0	53.9	49.0	51.1	47.9
Difference	-3.1	-1.5	12.4	5.8	-4.4	1.5	-4.5	-7.2	-11.4	-12.6	-14.4
[%]	-4	-2	16	8	-8	2	-8	-13	-23	-25	-30

The (baseline) scenarios reported in (EC, 2003) and (EC, 2004) are outdated to some extent. Examples of more recent baseline scenarios are those from the Netherlands (ECN/MNP, 2005) or new insights for future energy situation of the United Kingdom (DTI, 2006). Some general notions on assumptions and data requirements for quantifying the S/D index for future energy systems are described in Section B.2.

The results of these other scenario studies give an indication of both the effect of using another scenario - quite different in some respect compared to the old baseline and of effects on the long term (2040 in the Dutch case). In particular, noteworthy effects are visible with respect to the fuel mix of the electricity production (increasing role of renewables or coal at the expense of natural gas), and the import dependency of natural gas and oil.

C.4 More recent baseline scenarios NL and UK

The Netherlands - Global Economy scenario - 2020 and 2040

The Reference Projections Energy and Emissions 2005-2020 (ECN/MNP, 2005) are the most recent baseline scenarios for the Netherlands. It concerns two scenarios, Global Economy (GE) and Strong Europe (SE), which differ mainly with respect to future economic growth (and hence future energy demand) and to post-Kyoto climate policy. These scenarios are 'policy free', so based on existing policies and instruments as of 2004. An assumption in the GE scenario is that the global and EU climate policy ends after 2020 (CO₂ price of 0), while in the SE scenario more stringent climate policy will emerge with CO₂ price levels of more than 80 €/ton in 2040.

A further expansion of these and two other scenarios to the very long term (2040) has just been finalised (CPB/MNP/RPB, 2006; ECN, 2006). ECN was responsible for the theme 'Energy' in those scenarios.

The Global Economy is a scenario with a relatively high economic growth and hence a relatively increase in energy demand is the scenario which is currently the reference scenario for energy and climate policy making in the Netherlands.

The results for the three cases are presented in Table C.5 and in Figure C.3. The S/D index is only slightly less in 2020 compared to the old baseline. The decrease is mainly caused by a worse score on PES, despite a higher share of coal and lower share of gas. If the minimum score for coal would be 100, similar as for nuclear, the PES score would be 63.7 instead of 59.5. In that case, the baseline PES score would be 67.5 (instead of 65.7). The overall S/D score would then be 69.6 compared to 68.7 for the NL baseline 2020. Changes in PES scores propagate with a factor 0.49 (=0.7 x 0.7) in the total S/D index.

Note that the share of imported oil coming from outside EU or Norway has been assumed to be equal to the 2003 value (63%, with crude oil assumed to be a proxy for all oil i.e. crude oil and oil products).

The demand score remains equal, while the C+T score improves somewhat due to a higher share of CHP (35% in GE-2020, 21% in NL 2020 baseline). It is important to note that the scores on Industry, Tertiary and Transport have been assumed equal to the baseline case. Only the relative shares have been changed. The same holds for these demand sectors in 2040.

In GE-2040 the S/D index is 10 points less than in GE-2020. The main cause is that the Netherlands becomes a net importer of gas and hence more dependent of gas imports (42% dependency), which are assumed to originate for 50% outside the EU and Norway. Moreover, the share of oil (with 100% import dependency) increases. As a result the PES sub-index value drops almost 20 points, from 60 to 42.

Table C.5 *S/D index for the Netherlands, 2020 and 2040, impact of other scenarios: old model*

	NL-2020 (Baseline from (EC, 2003))		NL-GE-2020 (ECN, 2006)		NL-GE-2040 (ECN, 2006)	
S/D index		68.7		66.7		57.1
Demand	0.3	57.7	0.3	57.7	0.3	56.9
Industry	0.24	44	<i>0.29</i>	44	<u>0.32</u>	44
Residential	0.21	51	<i>0.20</i>	55	<u>0.19</u>	<u>51</u>
Tertiary	0.24	54	<i>0.21</i>	54	<u>0.19</u>	54
Transport	0.31	75	<i>0.30</i>	75	<u>0.31</u>	75
Supply	0.7	73.5	0.7	70.6	0.7	57.2
C+T	0.3	91.5	0.3	96.4	0.3	93.3
Electricity	0.3	100	0.3	92	0.3	<u>81</u>
Heat	0.5	85	0.5	100	0.5	<u>100</u>
Tr. Fuels	0.2	94	0.2	94	0.2	94
PES	0.7	65.7	0.7	59.5	0.7	41.7
Oil	0.36	10	<i>0.39</i>	10	<u>0.43</u>	10
Gas	0.52	100	<i>0.38</i>	100	<u>0.32</u>	<u>58</u>
Coal	0.06	70	<i>0.14</i>	70	<u>0.21</u>	70
Nuclear	0.00	100	<i>0.01</i>	100	<u>0.00</u>	100
Ren. ES	0.04	100	<i>0.06</i>	84	<u>0.02</u>	<u>92</u>
Other	0.02	100	0.02	100	<u>0.03</u>	100

	Import dep.	Non-EU	Import dep.	Non-EU	Import dep.	Non-EU
Oil	1.00	0.63	<i>0.98</i>	0.63	<u>1.00</u>	0.63
Gas	0.00	0.00	0.00	0.00	<u>0.41</u>	<u>0.50</u>
Coal	1.00		1.00		1.00	
Nuclear	1.00		1.00		1.00	
Ren. ES	0.00		<i>0.52</i>		<u>0.26</u>	
Other	0.00		0.00		0.00	

Notes:

- 1) The changes for the GE scenario in 2020 compared to the old baseline are marked in *italic*.
- 2) The changes for the GE scenario in 2040 compared to GE 2020 are underlined.

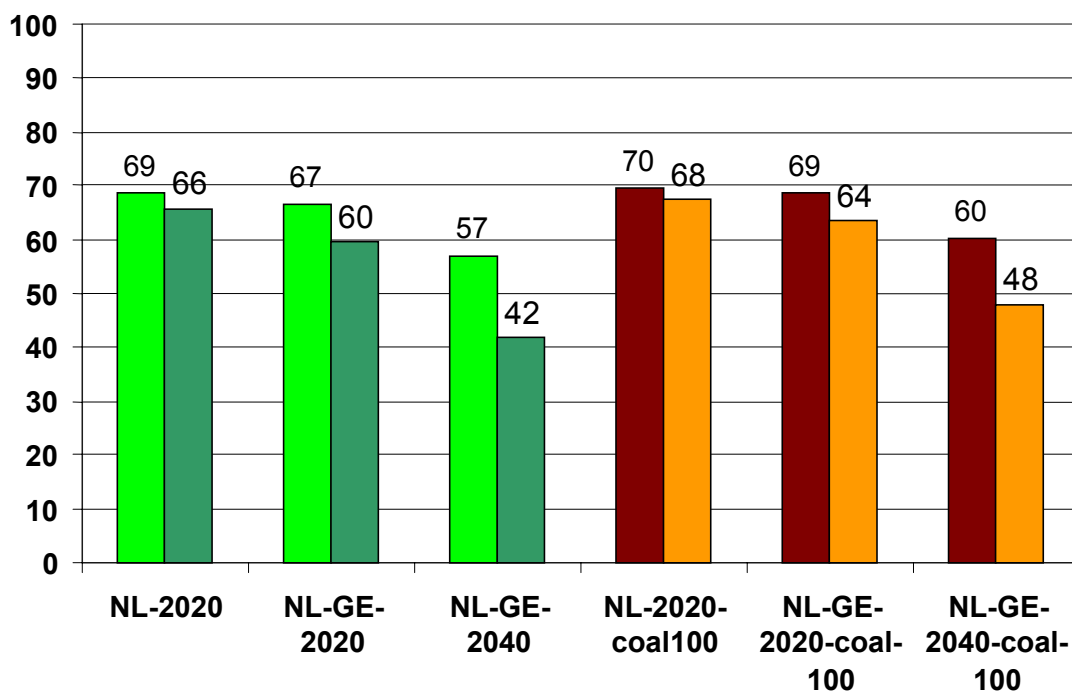


Figure C.6 *S/D Index the Netherlands, another future scenario (GE) and sensitivity on coal criterion (coal 100): old model*

The United Kingdom - In 2020 import dependencies of 75%

The decline of its indigenous energy supplies (oil and gas) makes the energy security of supply a major issue in the UK (DTI, 2006). The security of supply issue is one of the main reasons for the recent plea for new nuclear power plants in the UK. In (FCO, 2004) it is stated: "It is likely that the UK will become a net importer of gas annually by around 2006 and of oil by around 2010. By 2020, the UK is expected to be importing around 75% of its primary energy needs." So, this is quite different from the old UK baseline reported in (EC, 2003) in which the UK was still a net exporter of oil in 2020 and the import dependency for gas was only 36%. For nuclear fuel the import dependency was 76%.

As sensitivity to the UK-2020 baseline case, the following assumptions have therefore been made:

1. The import dependency for oil and gas is 75% in 2020, instead of 0% and 36%, respectively.
2. All other parameters have been based on and are equal to the original UK-2020 case, e.g. from the imported gas, 50% is assumed to come from outside the EU or Norway. In 2003, the natural gas imports came from Belgium (17%) and Norway (83%).

These changes effect the PES sub-index value that drops from 81 to 50 (c.f. Table C.2, column UK). As a result the total S/D Index value then drops from 72 to 56.5.

C.4.1 Sensitivity analysis¹⁷

As has been indicated in Section 5.2, the S/D Index Model uses parameters that have to be determined by expert judgement. Using the previous '2006' version of the S/D Index model and associated parameter values, multi-variate sensitivity analysis was used to investigate the impact of changes in these more subjective parameters for the S/D indices of today's energy supply security for The Netherlands and United Kingdom. Assuming uniform intervals for expert judgement the parameters for weights and criteria in the scoring rules were varied:

- Weights have been raised and reduced with 0.1.
- Benchmark criteria for energy intensities were changed +/- 20%.
- Parameters in scoring rules for determining sub-index values have been changed between -3% and +10%.

The number of parameters varied in this way amount to almost 30.

The uncertainty range for the S/D index for The Netherlands and the United Kingdom has a bandwidth of +/- 7 points, i.e. a range of about +/- 10%. The analysis gave also insight in the relative contributions of different aspects to this uncertainty. Figure C.4 shows the correlations between the most important varied parameters and the S/D index. The parameters with the highest correlations are the most important ones. It should be noted that some weights do not appear graphically in Figure 5.2 although they are important. This applies to some of the weights that sum up to 1 in combination with other weights. E.g. the weight for PES (w_{pes}) is equal to '1 - w_{c+t} ', so w_{pes} is dependent of the weight for conversion and transport, w_{c+t} . The w_{c+t} parameter has been varied and with the use of the relationship ' $w_{pes} = 1 - w_{c+t}$ ' the PES weight parameter is varied accordingly. For both The Netherlands and United Kingdom the factors that had the highest impact were the weights between energy conversion and transport (0.3) versus primary energy sources (0.7) and the benchmark values for final energy intensities. Other relatively important factors were for The Netherlands the criterion for oil and for the UK the CHP criterion.

For discussions in the conceptual phase on the quantification of the model parameters (see Section 3) it is important to note that when a specific country has a low sub-index score the choice for the corresponding attribute is of particular importance for that country. In this phase there are all sorts of risks of strategic behaviour by Member States. The quality of the negotiating process in this phase could be further enhanced when the various vulnerabilities would be made more explicit. Sensitivity analyses could therefore be an important element during conception and negotiation. Preceding sections in this Appendix C presented additional sensitivity analyses.

¹⁷ This Appendix part was Section 5.3 in the previous report ECN-C-06-039 (Scheepers et al., 2006).


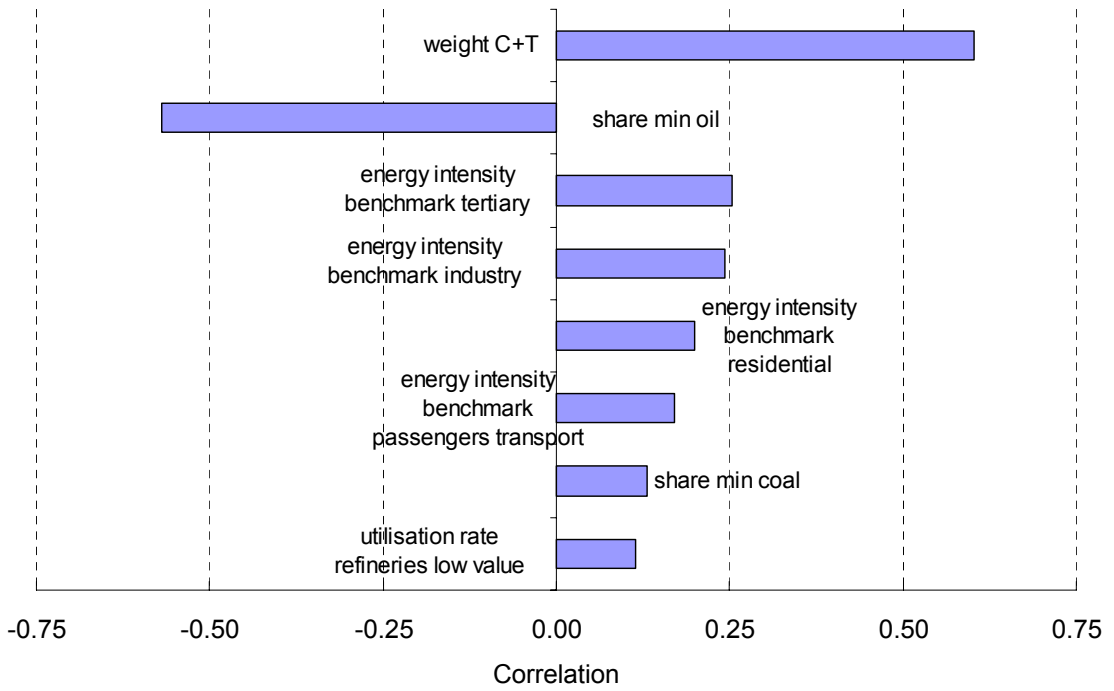


Figure C.7 Sensitivity analysis for United Kingdom (top) and The Netherlands (bottom): old model

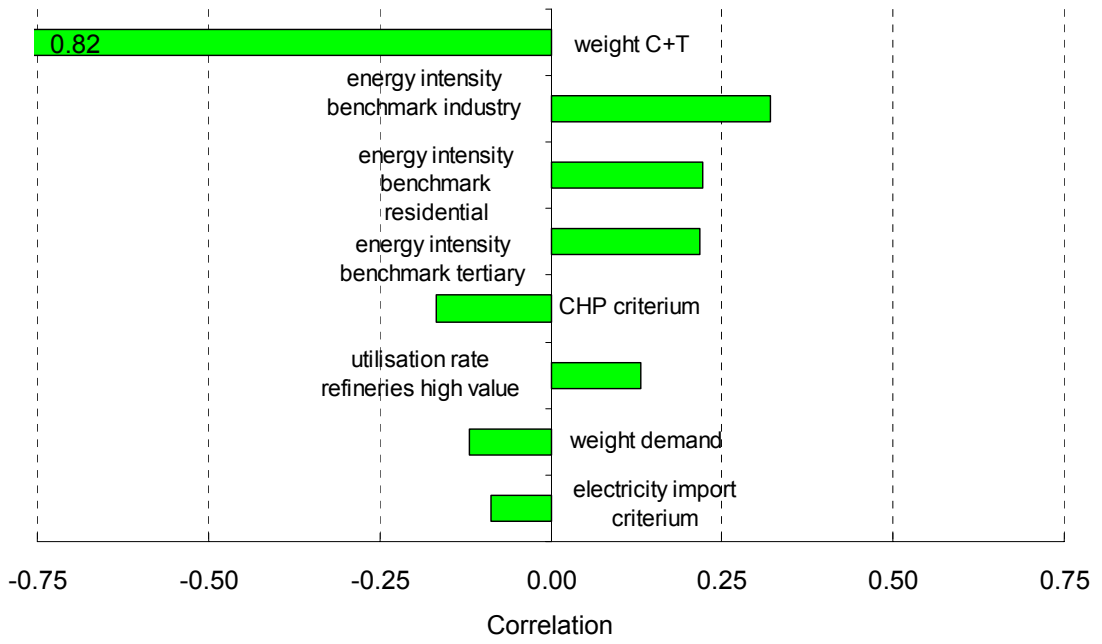